


Number of contacts

64

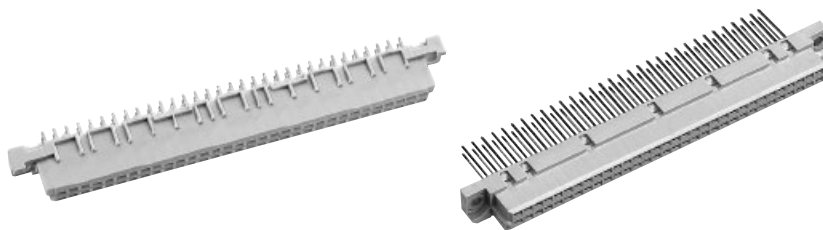

Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm	64		Performance level 3 on request	09 02 264 6824 09 02 464 6824 ^{b)} 09 02 764 6824 ^{c)}	09 02 264 2824	
	SMC			09 02 264 6841 ^{d)}		
Female connector with solder pins 4.5 mm	64			09 02 264 6825 09 02 264 6825 222 ^{f)} 09 02 464 6825 ^{b)} 09 02 764 6825 ^{c)}	09 02 264 2825	
	SMC			09 02 264 6829 ^{d)}		
Female connector with solder pins 13 mm	64			09 02 264 6421		
Female connector with press-in pins 4.5 mm	64			09 02 264 6850 09 02 264 6850 222 ^{f)}	09 02 264 2850	
Female connector with press-in pins without flange 5.3 mm	64			09 02 264 6870		
Female connector with press-in pins 13.2 mm	64			09 02 264 6861 ^{a)}		
Female connector with wrap posts ¹⁾ 13 mm	64			09 02 264 6821		
Female connector with solder lugs 5.2 mm	64			09 02 264 6823		

¹⁾ To be used only for wire wrap termination^{a)} Wrap posts selectively gold plated (performance level 3)^{b)} Connectors with snap-in clips see chapter 00^{c)} Connectors with coding see chapter 00^{d)} CTI > 400^{f)} Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2

Other contact arrangements on request