



MGK Series

Features

- Endurance with ripple current: 105°C, 5,000 hours
- RoHS Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance																													
Category Temperature Range	-25℃ ~ +105℃																													
Capacitance Tolerance	±20% (at 120Hz, 20℃)																													
Leakage Current (at 20℃)	I = 3√CV or 5 (mA) whichever is smaller (after 5 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																													
Tanδ (at 120 Hz, 20℃)	See the Dimensions & Permissible Ripple Current																													
Low Temperature Characteristics (at 120Hz)	Capacitance change : C(-25℃) / C(+20℃) ≥ 0.7																													
Endurance	<table><tr><td>Test Time</td><td colspan="5">5,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="5">Within ±20% of initial value</td></tr><tr><td>Tanδ</td><td colspan="5">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="5">Within specified value</td></tr></table>						Test Time	5,000 Hrs					Capacitance Change	Within ±20% of initial value					Tanδ	Less than 200% of specified value					Leakage Current	Within specified value				
	Test Time	5,000 Hrs																												
	Capacitance Change	Within ±20% of initial value																												
	Tanδ	Less than 200% of specified value																												
	Leakage Current	Within specified value																												
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with rated ripple current applied for 5,000 hours at 105℃.																														
Shelf Life Test	<table><tr><td>Test Time</td><td colspan="5">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="5">Within ±20% of initial value</td></tr><tr><td>Tanδ</td><td colspan="5">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="5">Within specified value</td></tr></table>						Test Time	1,000 Hrs					Capacitance Change	Within ±20% of initial value					Tanδ	Less than 200% of specified value					Leakage Current	Within specified value				
	Test Time	1,000 Hrs																												
	Capacitance Change	Within ±20% of initial value																												
	Tanδ	Less than 200% of specified value																												
	Leakage Current	Within specified value																												
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).																														
Ripple Current and Frequency Multipliers	<table><tr><td>Frequency (Hz)</td><td>50 / 60</td><td>100 / 120</td><td>300</td><td>1k</td><td>10k up</td></tr><tr><td>Multiplier</td><td>0.7</td><td>1.0</td><td>1.1</td><td>1.3</td><td>1.4</td></tr></table>						Frequency (Hz)	50 / 60	100 / 120	300	1k	10k up	Multiplier	0.7	1.0	1.1	1.3	1.4												
Frequency (Hz)	50 / 60	100 / 120	300	1k	10k up																									
Multiplier	0.7	1.0	1.1	1.3	1.4																									
Ripple Current and Temperature Multipliers	<table><tr><td>Temperature (℃)</td><td>40</td><td>60</td><td>85</td><td>105</td></tr><tr><td>Multiplier</td><td>2.44</td><td>2.16</td><td>2.00</td><td>1.00</td></tr></table>						Temperature (℃)	40	60	85	105	Multiplier	2.44	2.16	2.00	1.00														
Temperature (℃)	40	60	85	105																										
Multiplier	2.44	2.16	2.00	1.00																										
Failure percentage Failure rate	≤ 3% (During useful life) 70 fit (70×10 ⁻⁹ /h)																													

Diagram of Dimensions

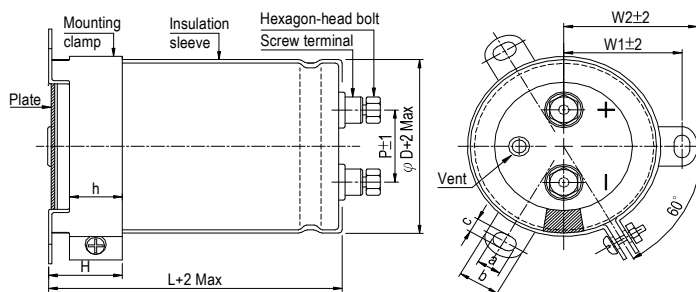

Unit: mm

ϕD	P	W1	W2	H	h	a	b	c
51	22.0	31.8	36.5	30	24	7	14.0	4.5
63.5	28.6	38.1	42.6	30	24	7	14.0	4.5
76.2	32.0	44.5	49.2	30	24	7	14.0	5.0
89	32.0	50.8	55.6	30	24	7	14.0	5.0

Screw Specifications:

Plug hexagon-head screw: M5×0.8×10

Max. screw tightening torque: 3.23Nm



Dimension and Permissible Ripple Current




Working Voltage V. DC	Capacitance 120Hz, 20°C μF	φD×L mm	Ripple Current 120 Hz, 105°C A/rms	Tan δ at 120Hz, 20°C	ESR 120Hz, 20°C mΩ	LC 5 minutes mA	Part Number
350	1,000	51 × 75	3.9	0.15	199	1.77	MGK102M2V--B075
	1,200	51 × 75	4.2	0.15	166	1.94	MGK122M2V--B075
	1,500	51 × 96	5.2	0.15	133	2.17	MGK152M2V--B096
	1,800	51 × 96	5.7	0.15	111	2.38	MGK182M2V--B096
	2,200	51 × 130	7.1	0.15	90.5	2.63	MGK222M2V--B130
	2,700	63.5 × 96	7.7	0.15	73.7	2.92	MGK272M2V--C096
	3,300	63.5 × 115	9.1	0.15	60.3	3.22	MGK332M2V--C115
	3,900	63.5 × 130	10.4	0.15	51.0	3.50	MGK392M2V--C130
	4,700	63.5 × 155	12.2	0.15	42.3	3.85	MGK472M2V--C155
	4,700	76.2 × 115	11.5	0.15	42.3	3.85	MGK472M2V--D115
	5,600	76.2 × 130	13.1	0.15	35.5	4.20	MGK562M2V--D130
	6,800	76.2 × 155	15.5	0.15	29.3	4.63	MGK682M2V--D155
400	8,200	89 × 157	18.1	0.15	24.3	5.00	MGK822M2V--E157
	10,000	89 × 157	19.9	0.15	19.9	5.00	MGK103M2V--E157
400	1,000	51 × 75	3.9	0.15	199	1.90	MGK102M2G--B075
	1,200	51 × 96	4.6	0.15	166	2.08	MGK122M2G--B096
	1,500	51 × 115	5.6	0.15	133	2.32	MGK152M2G--B115
	1,800	51 × 130	6.4	0.15	111	2.55	MGK182M2G--B130
	2,200	63.5 × 96	6.9	0.15	90.5	2.81	MGK222M2G--C096
	2,700	63.5 × 115	8.2	0.15	73.7	3.12	MGK272M2G--C115
	3,300	63.5 × 130	9.5	0.15	60.3	3.45	MGK332M2G--C130
	3,900	63.5 × 155	11.1	0.15	51.0	3.75	MGK392M2G--C155
	3,900	76.2 × 115	10.4	0.15	51.0	3.75	MGK392M2G--D115
	4,700	76.2 × 130	12.0	0.15	42.3	4.11	MGK472M2G--D130
	5,600	76.2 × 155	14.0	0.15	35.5	4.49	MGK562M2G--D155
	6,800	89 × 157	16.5	0.15	29.3	4.95	MGK682M2G--E157
450	8,200	89 × 157	18.1	0.15	24.3	5.00	MGK822M2G--E157
	1,000	51 × 96	4.2	0.15	199	2.01	MGK102M2W--B096
	1,200	51 × 115	5.0	0.15	166	2.20	MGK122M2W--B115
	1,500	51 × 130	5.9	0.15	133	2.46	MGK152M2W--B130
	1,800	63.5 × 96	6.3	0.15	111	2.70	MGK182M2W--C096
	2,200	63.5 × 115	7.4	0.15	90.5	2.98	MGK222M2W--C115
	2,700	63.5 × 130	8.6	0.15	73.7	3.31	MGK272M2W--C130
	2,700	76.2 × 115	8.7	0.15	73.7	3.31	MGK272M2W--D115
	3,300	63.5 × 155	10.2	0.15	60.3	3.66	MGK332M2W--C155
	3,300	76.2 × 130	10.1	0.15	60.3	3.66	MGK332M2W--D130
	3,900	76.2 × 155	11.7	0.15	51.0	3.97	MGK392M2W--D155
	4,700	76.2 × 155	12.9	0.15	42.3	4.36	MGK472M2W--D155
450	5,600	89 × 157	14.9	0.15	35.5	4.76	MGK562M2W--E157

Part Numbering System


MGK Series	1000μF	±20%	350V	Plain case + Mounting clamp	M5 Post	51 φ × 75L	Pb-free Terminal + PVC Sleeve
MGK	102	M	2V	-	-	B075	
Series Name	Capacitance	Capacitance tolerance	Rated voltage	Case Type	Terminal type	Case size	Terminal and Sleeve Type
Example:		M = ±20% K = ±10%	Example:			Example:	
Cap.	Symbol		WV	Symbol		φD×L	Code
1,000	102		350	2V		63.5×115	C115
3,300	332		400	2G		76.2×130	D130
10,000	103		450	2W		89×157	E157

Note: For more details, please refer to "Part Numbering System (Screw Type)" on page 17.

Typical Endurance Curves

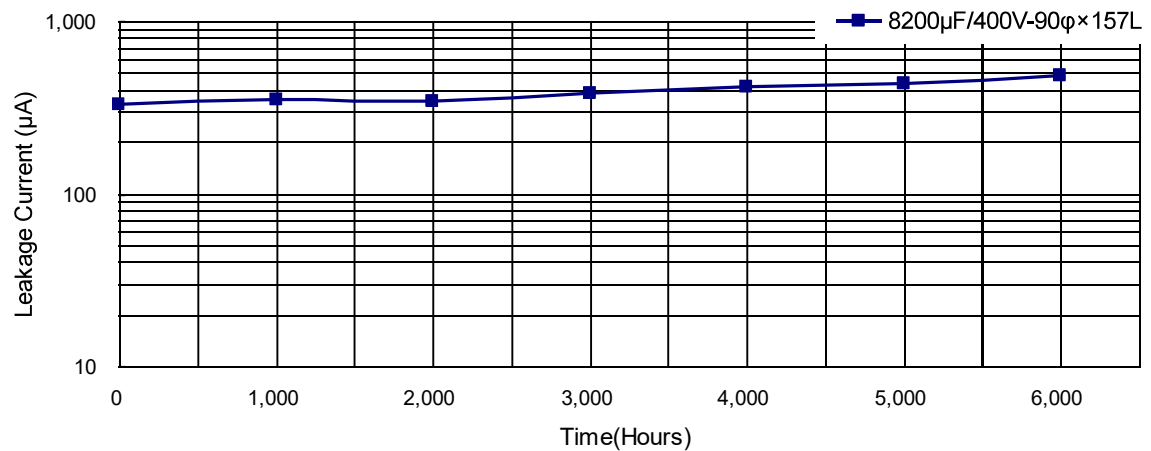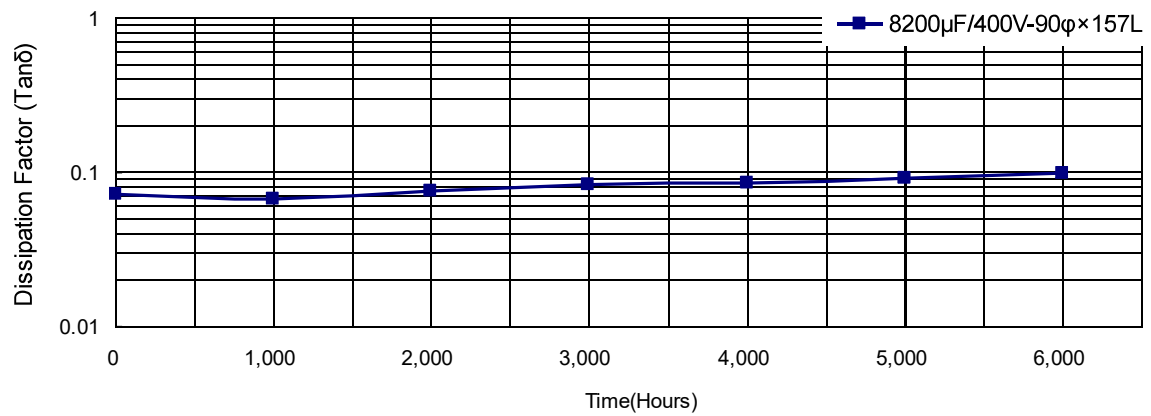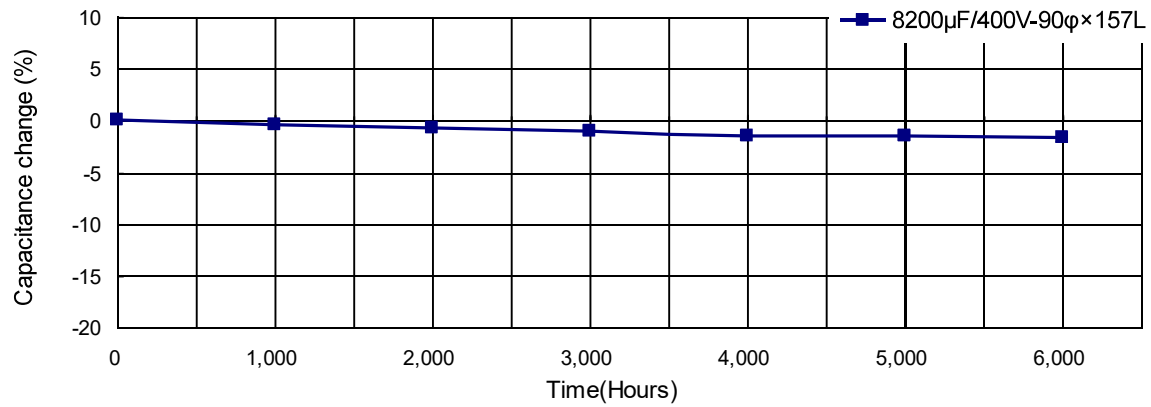

Useful Life Chart

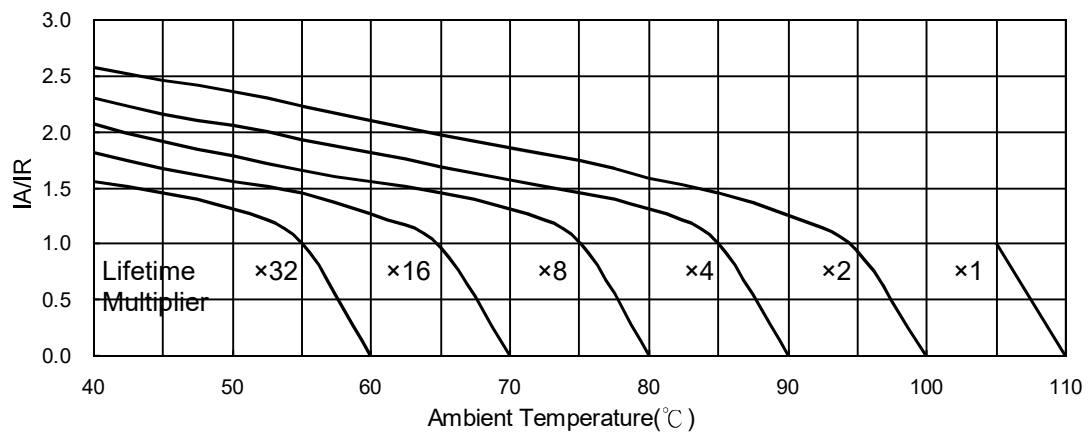

IA: Actual ripple current IR: Rated ripple current

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lelon:

[MGK222M2W--C105](#) [MGK332M2G--D130](#) [MGK392M2G--C155](#) [MGK222M2W--C130](#) [MGK152M2G--B115](#)