
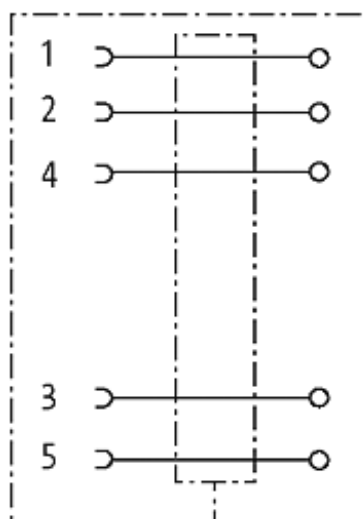


M12 FEMALE 0° SHIELDED WIREABLE SCREW TERM.5-pol. max.0,75mm² 6-8mm[Link to Product](#)**Illustration**

Female

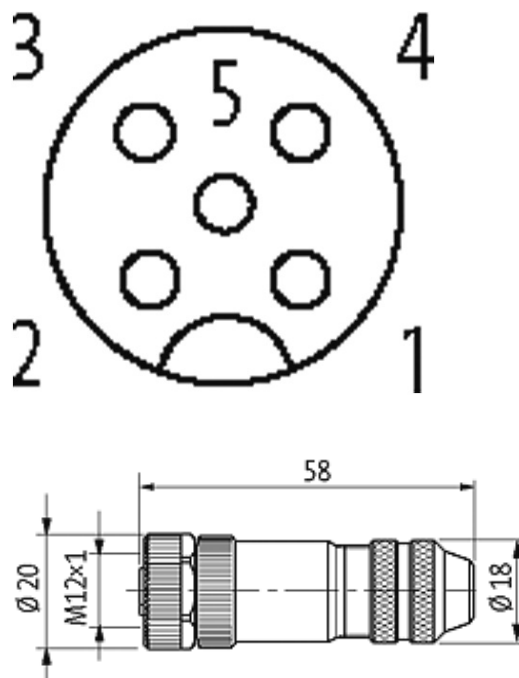

Product may differ from Image

Form

Form	13401
------	-------

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879198790
eClass	27279218
minimum order quantity	1