

3037960

https://www.phoenixcontact.com/us/products/3037960

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Knife-disconnect terminal block, nom. voltage: 400 V, nominal current: 20 A, 1 level, connection method: Spring-cage connection, Rated cross section: $2.5~\text{mm}^2$, cross section: $0.08~\text{mm}^2$ - $4~\text{mm}^2$, mounting: NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	3037960
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Product key	BE2131
GTIN	4017918936853
Weight per piece (including packing)	9.82 g
Weight per piece (excluding packing)	9.024 g
Country of origin	DE



3037960

https://www.phoenixcontact.com/us/products/3037960

Technical data

Product properties

Product type	Disconnect terminal block
Number of connections	3
Number of rows	1
Potentials	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	3
Nominal cross section	2.5 mm²

1 level

ievei	
Stripping length	8 mm 10 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.08 mm² 4 mm²
Cross section AWG	28 12 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm² 2.5 mm²
Conductor cross section, flexible [AWG]	28 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm² 2.5 mm²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm² 2.5 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm²
Nominal current	20 A (with 4 mm² conductor cross section)
Maximum load current	20 A (in case of a 4 mm² conductor cross section, the maximum load current must not be exceeded by the total current of all connected conductors.)
Nominal voltage	400 V
Nominal cross section	2.5 mm²

Dimensions

Width	5.2 mm
End cover width	2.2 mm

Material specifications

Color	gray



3037960

https://www.phoenixcontact.com/us/products/3037960

Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (storage/transport)	30 % 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15




3037960

https://www.phoenixcontact.com/us/products/3037960

Drawings

Circuit diagram

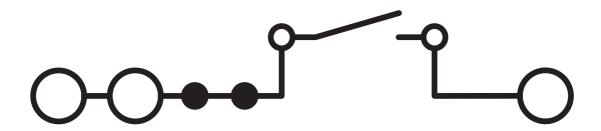



3037960

https://www.phoenixcontact.com/us/products/3037960

Classifications

ECLASS			
	ECLASS-11.0	27141126	
ETIM			
	ETIM 8.0	EC000902	
UNSPSC			
	UNSPSC 21.0	39121400	



3037960

https://www.phoenixcontact.com/us/products/3037960

Environmental product compliance

EU RoHS			
Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			
REACH candidate substance (CAS No.)	No substance above 0.1 wt%		



3037960

https://www.phoenixcontact.com/us/products/3037960

Accessories



Note: Applying some accessories below might limit this product.

FBS 2-5 - Plug-in bridge

3030161

https://www.phoenixcontact.com/us/products/3030161



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

Max. current carrying capacity: 24 A

FBS 3-5 - Plug-in bridge

3030174

https://www.phoenixcontact.com/us/products/3030174



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 4-5 - Plug-in bridge

3030187

https://www.phoenixcontact.com/us/products/3030187



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

1 Max. current carrying capacity: 24 A

FBS 5-5 - Plug-in bridge

3030190

https://www.phoenixcontact.com/us/products/3030190



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 10-5 - Plug-in bridge

3030213

https://www.phoenixcontact.com/us/products/3030213



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red

Max. current carrying capacity: 24 A

FBS 20-5 - Plug-in bridge

3030226

https://www.phoenixcontact.com/us/products/3030226



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 50-5 - Plug-in bridge

3038930

https://www.phoenixcontact.com/us/products/3038930



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

Max. current carrying capacity: 24 A

FBS 2-5 BU - Plug-in bridge

3036877

https://www.phoenixcontact.com/us/products/3036877



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 3-5 BU - Plug-in bridge

3036880

https://www.phoenixcontact.com/us/products/3036880



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue

1 Max. current carrying capacity: 24 A

FBS 4-5 BU - Plug-in bridge

3036893

https://www.phoenixcontact.com/us/products/3036893



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 5-5 BU - Plug-in bridge

3036903

https://www.phoenixcontact.com/us/products/3036903



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue

Max. current carrying capacity: 24 A

FBS 10-5 BU - Plug-in bridge

3036916

https://www.phoenixcontact.com/us/products/3036916



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 20-5 BU - Plug-in bridge

3036929

https://www.phoenixcontact.com/us/products/3036929



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue

Max. current carrying capacity: 24 A

FBS 50-5 BU - Plug-in bridge

3032114

https://www.phoenixcontact.com/us/products/3032114



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 2-5 GY - Plug-in bridge

3038969

https://www.phoenixcontact.com/us/products/3038969



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: gray

1 Max. current carrying capacity: 24 A

FBS 3-5 GY - Plug-in bridge

3038972

https://www.phoenixcontact.com/us/products/3038972



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: gray



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 4-5 GY - Plug-in bridge

3038985

https://www.phoenixcontact.com/us/products/3038985



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: gray

Max. current carrying capacity: 24 A

FBS 5-5 GY - Plug-in bridge

3038998

https://www.phoenixcontact.com/us/products/3038998



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: gray



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 10-5 GY - Plug-in bridge

3039007

https://www.phoenixcontact.com/us/products/3039007



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: gray

Max. current carrying capacity: 24 A

FBS 20-5 GY - Plug-in bridge

3038671

https://www.phoenixcontact.com/us/products/3038671



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: gray



3037960

https://www.phoenixcontact.com/us/products/3037960

FBS 50-5 GY - Plug-in bridge

3032127

https://www.phoenixcontact.com/us/products/3032127



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: gray

Max. current carrying capacity: 24 A

FBSR 2-5 - Plug-in bridge

3033702

https://www.phoenixcontact.com/us/products/3033702



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

17.5 A Max. current carrying capacity: 17.5 A



3037960

https://www.phoenixcontact.com/us/products/3037960

FBSR 3-5 - Plug-in bridge

3001591

https://www.phoenixcontact.com/us/products/3001591



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red

17.5 A Max. current carrying capacity: 17.5 A

FBSR 4-5 - Plug-in bridge

3001592

https://www.phoenixcontact.com/us/products/3001592



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red

17.5 A Max. current carrying capacity: 17.5 A



3037960

https://www.phoenixcontact.com/us/products/3037960

FBSR 5-5 - Plug-in bridge

3001593

https://www.phoenixcontact.com/us/products/3001593



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red

1 Max. current carrying capacity: 17.5 A

FBSR 10-5 - Plug-in bridge

3033710

https://www.phoenixcontact.com/us/products/3033710



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red

17.5 A Max. current carrying capacity: 17.5 A



3037960

https://www.phoenixcontact.com/us/products/3037960

RB ST (2,5/4)-1,5/S - Reducing bridge

3214356

https://www.phoenixcontact.com/us/products/3214356



Reducing bridge, pitch: 6.7 mm, number of positions: 2, length: 23 mm, color: red

1 Max. current carrying capacity: 24 A

RB ST 6-(2,5/4) - Reducing bridge

3030860

https://www.phoenixcontact.com/us/products/3030860



Reducing bridge, pitch: 9 mm, number of positions: 2, length: 30 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

RB ST 10-(2,5/4) - Reducing bridge

3030873

https://www.phoenixcontact.com/us/products/3030873



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

1 Max. current carrying capacity: 35 A

RB ST 16-(2,5/4) - Reducing bridge

3030886

https://www.phoenixcontact.com/us/products/3030886



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 37 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

RB ST 35-(2,5/4) - Reducing bridge

3030899

https://www.phoenixcontact.com/us/products/3030899



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

1 Max. current carrying capacity: 35 A

RB ST (2,5/4)-1,5 - Reducing bridge

3038943

https://www.phoenixcontact.com/us/products/3038943



Reducing bridge, pitch: 7.1 mm, number of positions: 2, length: 23 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

RB UT 6-ST(2,5/4) - Reducing bridge

3047264

https://www.phoenixcontact.com/us/products/3047264



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 33 mm, color: red

1 Max. current carrying capacity: 35 A

RB UT 35-ST(2,5/4) - Reducing bridge

3047280

https://www.phoenixcontact.com/us/products/3047280



Reducing bridge, pitch: 10.8 mm, number of positions: 2, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

RB UT 10-ST(2,5/4) - Reducing bridge

3047086

https://www.phoenixcontact.com/us/products/3047086



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 33 mm, color: red

1 Max. current carrying capacity: 40 A

RB UT 16-ST(2,5/4) - Reducing bridge

3047099

https://www.phoenixcontact.com/us/products/3047099



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 41 mm, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

D-ST 2,5-QUATTRO - End cover

3030514

https://www.phoenixcontact.com/us/products/3030514

End cover, depth: 29.1 mm, width: 2.2 mm, height: 72.2 mm, color: gray



ATP-ST QUATTRO - Partition plate

3030815

https://www.phoenixcontact.com/us/products/3030815

Partition plate, depth: 45 mm, width: 2 mm, height: 90.9 mm, color: gray





3037960

https://www.phoenixcontact.com/us/products/3037960

SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/us/products/1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: $0.6 \times 3.5 \times 100$ mm, 2-component grip, with non-slip grip

WST 2,5 - Warning cover

3030941

https://www.phoenixcontact.com/us/products/3030941



Warning cover, 5-pos., for terminal width: 5.2 mm



3037960

https://www.phoenixcontact.com/us/products/3037960

D-ST 2,5-QUATTRO-0,8 OG - End cover

3030513

https://www.phoenixcontact.com/us/products/3030513

End cover, depth: 29 mm, width: 0.8 mm, height: 72 mm, color: orange



ST-IL - Mounting material

3039900

https://www.phoenixcontact.com/us/products/3039900

Operating decal for the ST terminal block





3037960

https://www.phoenixcontact.com/us/products/3037960

S-MT - Switching lock

3247954

https://www.phoenixcontact.com/us/products/3247954



Switching lock, depth: 23.1 mm, width: 3.5 mm, height: 10.5 mm, color: white

ST-BW - Actuation tool

1207608

https://www.phoenixcontact.com/us/products/1207608



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages



3037960

https://www.phoenixcontact.com/us/products/3037960

CEC 2,5 - Filler plug

3062757

https://www.phoenixcontact.com/us/products/3062757



Cover for conductor shaft, 10-pos., for spring cage terminal blocks (ST) and terminal blocks with push-in technology (PT) with a width of $5.2~\mathrm{mm}$

P-CO 2-5 R47K - Component connector

3032447

https://www.phoenixcontact.com/us/products/3032447



Component connector, with 47 kOhm resistance for wire-break monitoring, pitch: 5.2 mm, depth: 34.8 mm, width: 4.1 mm, height: 8.9 mm, number of positions: 2, color: black



3037960

https://www.phoenixcontact.com/us/products/3037960

BST 2,5 - Group cover marker

3061282

https://www.phoenixcontact.com/us/products/3061282



Cover for actuation shaft, 5-pos., for spring-cage terminal blocks with width of $5.2\,\mathrm{mm}$

NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/us/products/0801733



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



3037960

https://www.phoenixcontact.com/us/products/3037960

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/us/products/0801681



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/us/products/1204119



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver



3037960

https://www.phoenixcontact.com/us/products/3037960

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/us/products/1204122



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/us/products/0801704



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



3037960

https://www.phoenixcontact.com/us/products/3037960

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/us/products/1206421



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/us/products/1206434



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver



3037960

https://www.phoenixcontact.com/us/products/3037960

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/us/products/0801762



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/us/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5





3037960

https://www.phoenixcontact.com/us/products/3037960

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

https://www.phoenixcontact.com/us/products/1050004



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: $5.1 \times 10.5 \text{ mm}$, Number of individual labels: 10

ZB 5 CUS - Zack marker strip

0824962

https://www.phoenixcontact.com/us/products/0824962



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10



3037960

https://www.phoenixcontact.com/us/products/3037960

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

https://www.phoenixcontact.com/us/products/1050017



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

https://www.phoenixcontact.com/us/products/1050020



Zack marker strip, white, Printed vertically: consecutive numbers 1 \dots 10, 11 \dots 20, etc. up to 491 \dots 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm



3037960

https://www.phoenixcontact.com/us/products/3037960

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

https://www.phoenixcontact.com/us/products/1050033



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

https://www.phoenixcontact.com/us/products/1050415



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10



3037960

https://www.phoenixcontact.com/us/products/3037960

UC-TM 5 - Marker for terminal blocks

0818108

https://www.phoenixcontact.com/us/products/0818108



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

UC-TM 5 CUS - Marker for terminal blocks

0824581

https://www.phoenixcontact.com/us/products/0824581



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96



3037960

https://www.phoenixcontact.com/us/products/3037960

UCT-TM 5 - Marker for terminal blocks

0828734

https://www.phoenixcontact.com/us/products/0828734



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

UCT-TM 5 CUS - Marker for terminal blocks

0829595

https://www.phoenixcontact.com/us/products/0829595



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72



3037960

https://www.phoenixcontact.com/us/products/3037960

GBS 5-25X12 - Group marker label for terminal marking

0810588

https://www.phoenixcontact.com/us/products/0810588



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

GBS 5-25X5 - Group marker label for terminal marking

0829126

https://www.phoenixcontact.com/us/products/0829126



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24×4 mm label or manually using B-STIFT, in the foot part with ZB 5



3037960

https://www.phoenixcontact.com/us/products/3037960

STP 5-2-ZB - Marker carriers

3037643

https://www.phoenixcontact.com/us/products/3037643



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UCT-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

https://www.phoenixcontact.com/us/products/0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10



3037960

https://www.phoenixcontact.com/us/products/3037960

ZBF 5 CUS - Zack Marker strip, flat

0825025

https://www.phoenixcontact.com/us/products/0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808671

https://www.phoenixcontact.com/us/products/0808671



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 \dots 10, 11 \dots 20, etc. up to 491 \dots 500, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10



3037960

https://www.phoenixcontact.com/us/products/3037960

ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

https://www.phoenixcontact.com/us/products/0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

ZBF 5,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810821

https://www.phoenixcontact.com/us/products/0810821



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers $2\dots20$, $22\dots40$, etc. up to $82\dots100$, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15×5.15 mm, Number of individual labels: 10



3037960

https://www.phoenixcontact.com/us/products/3037960

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

https://www.phoenixcontact.com/us/products/0810863



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

UC-TMF 5 - Marker for terminal blocks

0818153

https://www.phoenixcontact.com/us/products/0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: $5.2 \, \text{mm}$, lettering field size: $4.6 \times 5.1 \, \text{mm}$, Number of individual labels: $96 \, \text{mag}$



3037960

https://www.phoenixcontact.com/us/products/3037960

UC-TMF 5 CUS - Marker for terminal blocks

0824638

https://www.phoenixcontact.com/us/products/0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm, Number of individual labels: 96

UCT-TMF 5 - Marker for terminal blocks

0828744

https://www.phoenixcontact.com/us/products/0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72



3037960

https://www.phoenixcontact.com/us/products/3037960

UCT-TMF 5 CUS - Marker for terminal blocks

0829658

https://www.phoenixcontact.com/us/products/0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm, Number of individual labels: 72

ISH 2,5/0,2 - Insulating sleeve

3002843

https://www.phoenixcontact.com/us/products/3002843



Insulating sleeve, color: white



3037960

https://www.phoenixcontact.com/us/products/3037960

ISH 2,5/0,5 - Insulating sleeve

3002856

https://www.phoenixcontact.com/us/products/3002856



Insulating sleeve, color: gray

ISH 2,5/1,0 - Insulating sleeve

3002869

https://www.phoenixcontact.com/us/products/3002869



Insulating sleeve, color: black



3037960

https://www.phoenixcontact.com/us/products/3037960

PAI-4-N GY - Test adapter

3032871

https://www.phoenixcontact.com/us/products/3032871



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

PS-5 - Test plug

3030983

https://www.phoenixcontact.com/us/products/3030983



Test plug, Modular test plug, number of positions: 1, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

DP PS-5 - Spacer plate

3036725

https://www.phoenixcontact.com/us/products/3036725



Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-5/2,3MM RD - Test plug

3038723

https://www.phoenixcontact.com/us/products/3038723



Test plug, number of positions: 1, color: red



3037960

https://www.phoenixcontact.com/us/products/3037960

E/AL-NS 35 - End bracket

1201662

https://www.phoenixcontact.com/us/products/1201662



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com