
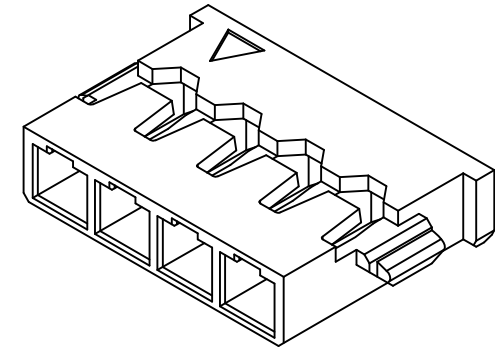
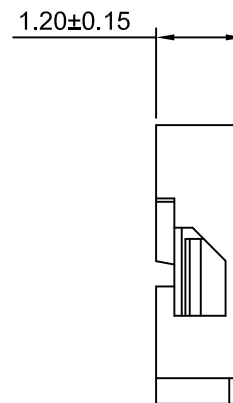
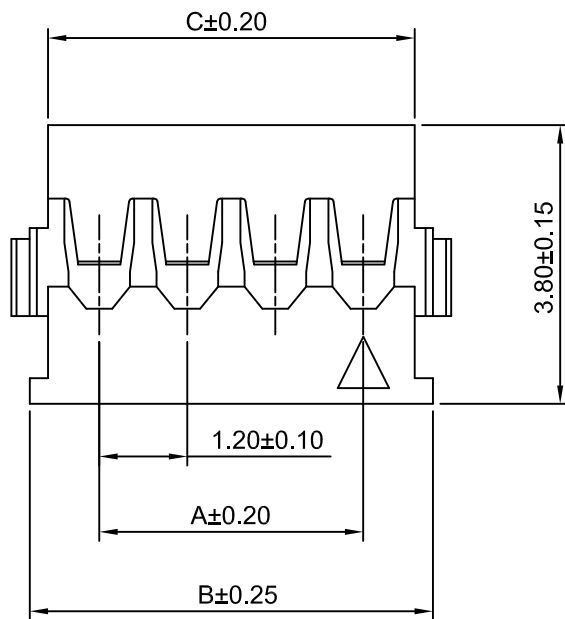


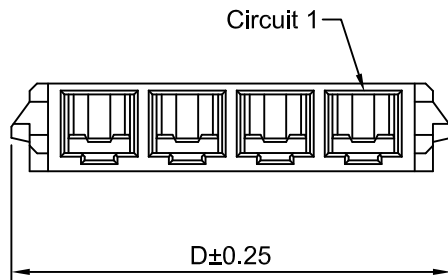

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20MΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Material:Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2P	1.20	3.10	2.60	3.60	9P	9.60	11.50	11.00	12.00
3P	2.40	4.30	3.80	4.80	10P	10.80	12.70	12.20	13.20
4P	3.60	5.50	5.00	6.00	11P	12.00	13.90	13.40	14.40
5P	4.80	6.70	6.20	7.20	12P	13.20	15.10	14.60	15.60
6P	6.00	7.90	7.40	8.40	13P	14.40	16.30	15.80	16.80
7P	7.20	9.10	8.60	9.60	14P	15.60	17.50	17.00	18.00
8P	8.40	10.30	9.80	10.80	15P	16.80	18.70	18.20	19.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack Yln

Title :
1.20mm PITCH

Housing

General Tolerance

x.xx±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : **A1201H-XP**

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2019.05.30