

### RAYCHEM | RAYCHEM RNF-100

TE Internal #: NB15524001

Clear, 2:1, Single Wall Tubing, Shrinks To .58 mm [.023 in], Irradiated Modified Polyolefin, 1.17 mm [.046 in] Inner Diameter,

RAYCHEM RNF-100

View on TE.com >



Heat Shrink Tubing > RNF-100-CL Heat Shrink Tubing



Primary Product Color: Clear

Wall Type: Single Wall

Expanded Inside Diameter (Min): 1.17 mm [ .046 in ]
Recovered Inside Diameter (Max): .58 mm [ .023 in ]

Shrink Ratio: 2:1

All RNF-100-CL Heat Shrink Tubing (45)

## **Features**

## **Product Type Features**

Wall Type	Single Wall
Electrical Characteristics	
Operating Voltage (Max)	.6 kV
Body Features	
Fluid Type	Gasoline, Hydraulic Fluid, Lubricating Oil
Primary Product Color	Clear
Shrink Ratio	2:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Flexible
Dimensions	
Recovered Wall Thickness (Tolerance)	.08 mm[.003 in]
Recovered Wall Thickness (Nominal)	.4 mm[.016 in]
Expanded Inside Diameter (Min)	1.17 mm[.046 in]
Recovered Inside Diameter (Max)	.58 mm[.023 in]
Tubing Size Range	.58 – 1.17 mm[.023 – .046 in]



Shrink Temperature (Min)	95 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 – 135 °C
Recovery Temperature	121 °C
Operation/Application	
Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Reel
Other	
Meets Low Outgassing Requirements	No
Product Source	China, Czech Republic

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits




as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## Compatible Parts



## Also in the Series | RAYCHEM RNF-100

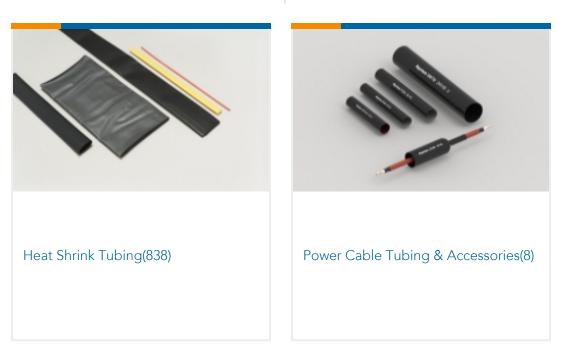

# Customers Also Bought

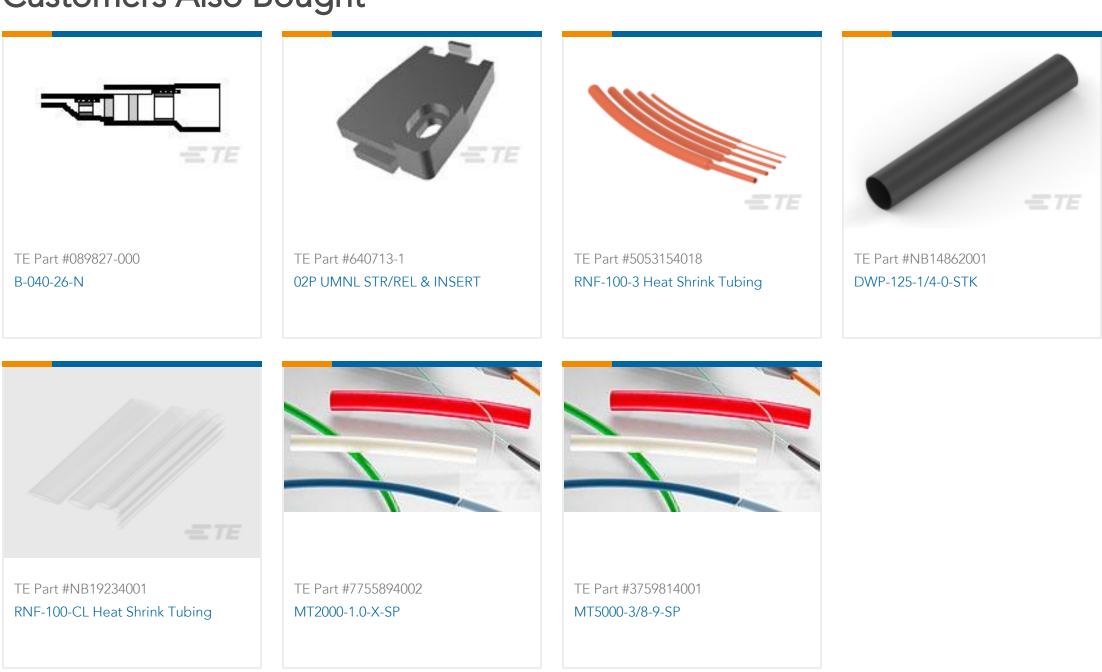

### **Documents**

Clear, 2:1, Single Wall Tubing, Shrinks To .58 mm [.023 in], Irradiated Modified Polyolefin, 1.17 mm [.046 in] Inner Diameter, RAYCHEM RNF-100



**Product Drawings** 

RNF-100-3/64-CL-SP

English

Datasheets & Catalog Pages

RNF-100 Pages from 9-1773447-9

English

**Product Specifications** 

**Application Specification** 

English