


由Autodesk教育版产品制作

由Autodesk教育版产品制作

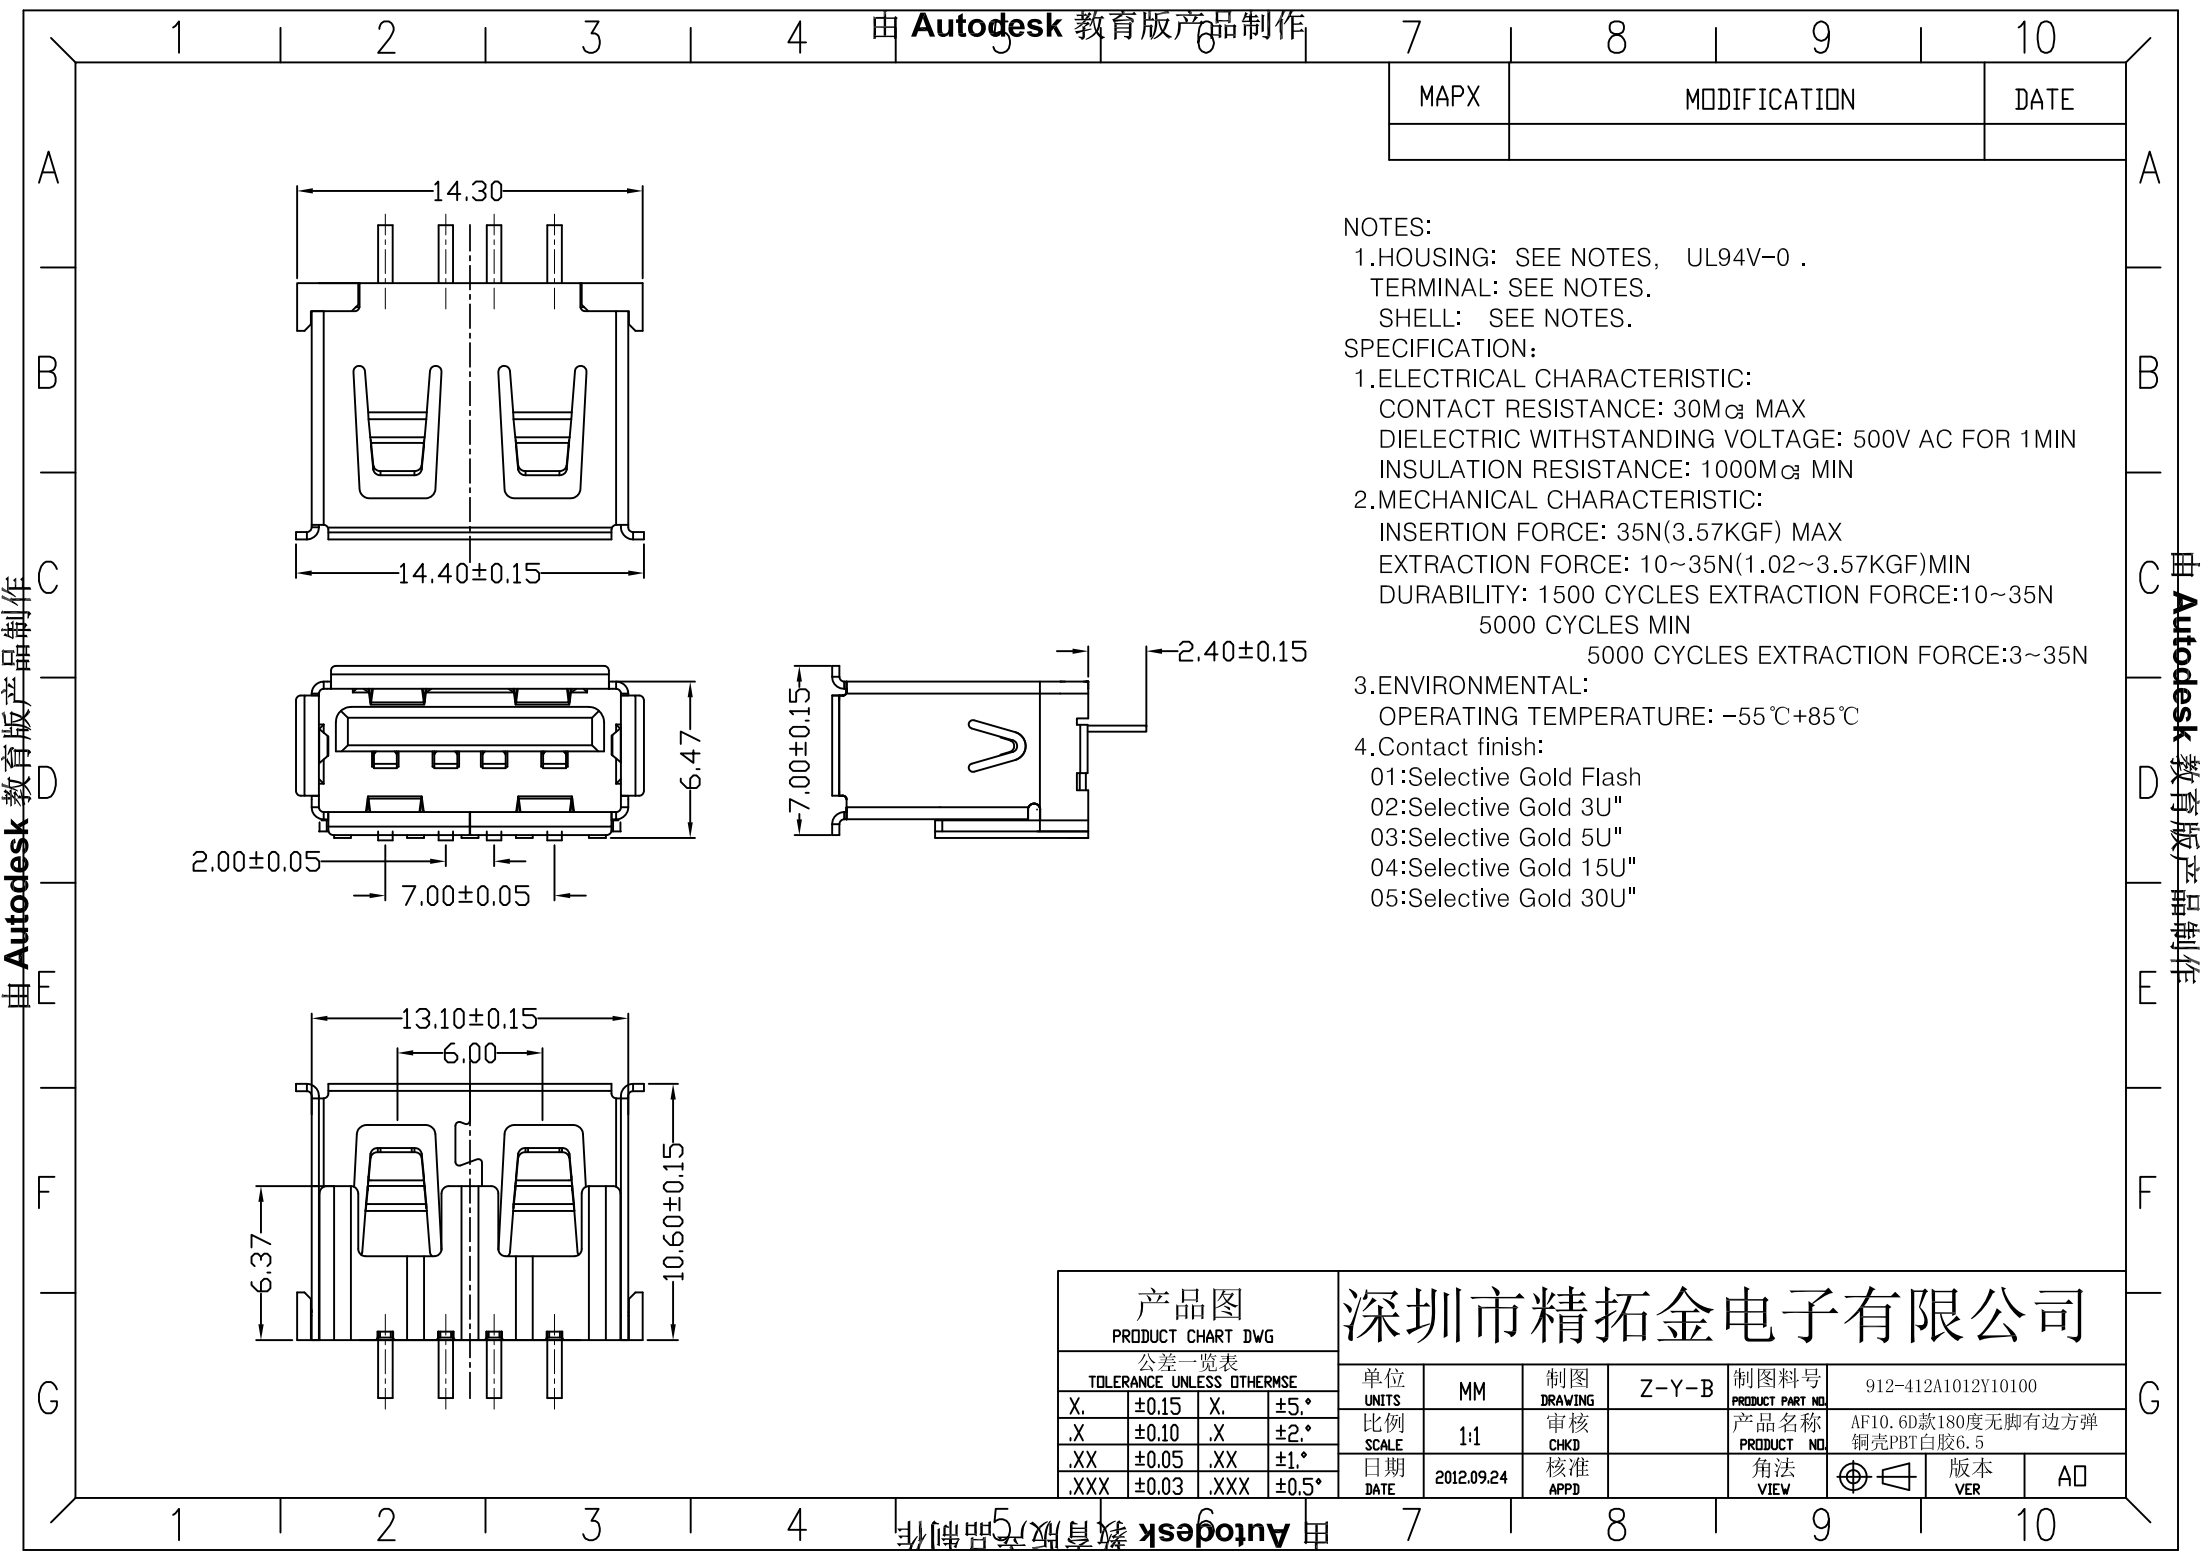

NOTES:
1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B	制图料号	912-412A1012Y10100
X.	±0.15	X.	±5.°	UNITS		DRAWING		PRODUCT PART NO.	
.X	±0.10	.X	±2.°	比例	1:1	审核		产品名称	AF10.6D款180度无脚有边方弹
.XX	±0.05	.XX	±1.°	SCALE		核淮		PRODUCT NO.	铜壳PBT白胶6.5
.XXX	±0.03	.XXX	±0.5°	日期	2012.09.24	核淮		角法	版本
				DATE		APPD		VIEW	VER
								AD	

由Autodesk教育版产品制作

由Autodesk教育版产品制作