
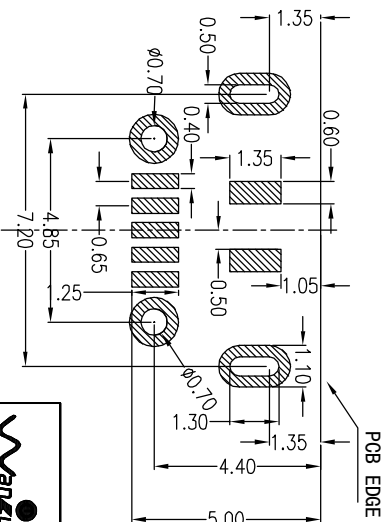

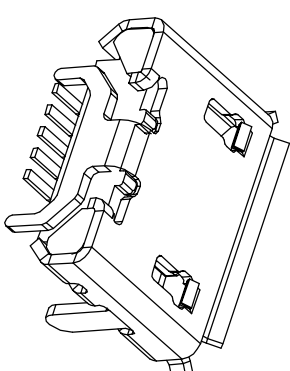


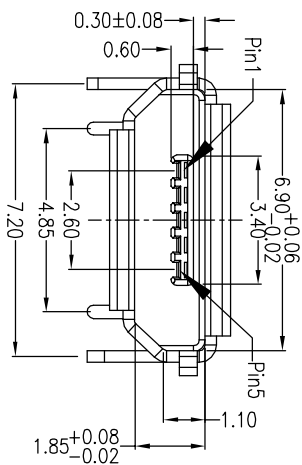


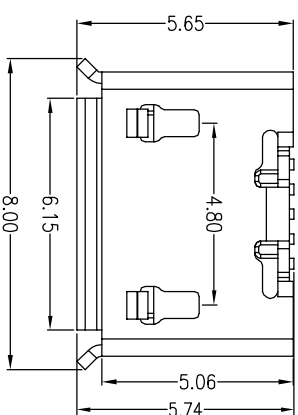

Note:
1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94V-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: copper alloy, t=0.30mm

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kg Min.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)	MICRO 5P牛角卷边	本 (REV)		比例 (SCALE) 1:1
料号 (PART NO)	MICRO-5F-JB-NJ-4.85	日期 (DATE)		公差 (TOLERANCE) UNLESS SPECIFIED
模号 (MODEL NO)		设计 (DESIGN)		X.X ±0.30
		审核 (CHECKED)		X.XX ±0.10
		核准 (APPROVED)		X.X ±0.05
				X.X ±0.02