

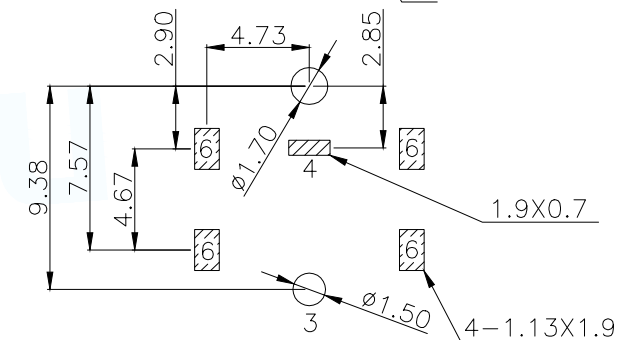
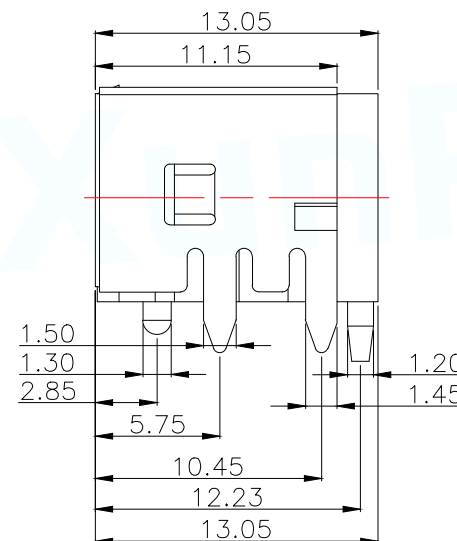
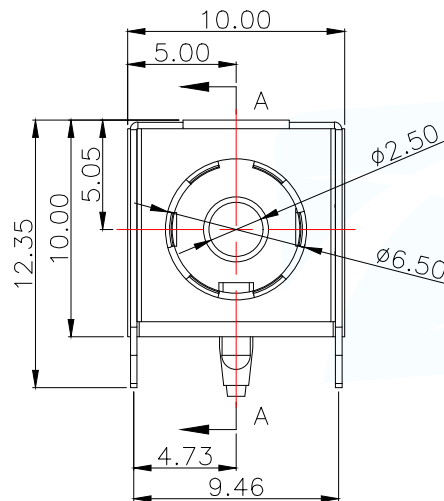
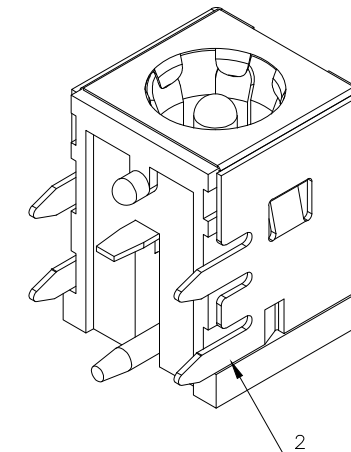
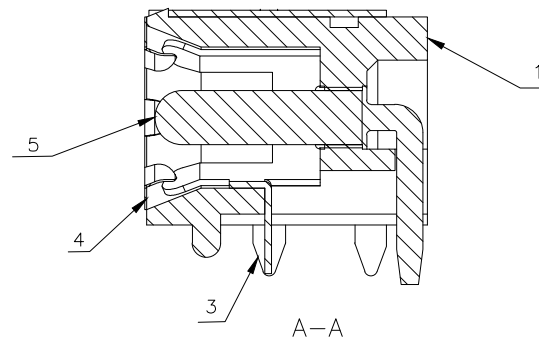





PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 24V 8A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-40C°~+85C°
service life	5000cycles



RECOMMEND PULG



SCHEMATIC

5	圓針	1	黃銅棒	鍍銀
4	蓋片	1	H62黃銅帶(Y)	鍍銀
3	簧片	1	磷銅帶	銅鍍
2	屏蔽罩	1	H62黃銅帶(Y)	黑
1	底座	1	PPA	黑
序号	名称	数量	材料	备注

MANUFACTURE DWG

 东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE:
DC SOCKET

PAR DC-091-A250

DWN

CHKD

APVD

SCALE N/A

UNIT:MM

SIZE:A4

SHEET:1F1

REV:A

DECIMALS:

X.X±0.30

X.XX±0.25

X.XXX±0.15

ANGLES:

X.*±5°

X.X°±1°

CUSTOMER COPY

REV:A