
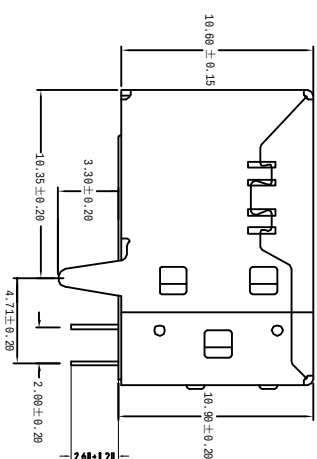




规格说明: Specifications:
电气特性: Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
 - 2.额定电压: Voltage Rating
30V DC
 - 3.接触阻抗: Contact Resistance
30 milliohms MAX
 - 4.耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - 5.绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN
- 物理性能: Mechanical:

1. 插拔力: Connector Mate and Ummate Force
Mate force: 3.57kgf (MAX)
Ummate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

- 1. 塑胶:Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT White/Black
- 2. 端子:Contact:Copper Alloy C2680
- 3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2. 外壳:Shell:
Nickel Plating



 深圳市万骏达电子有限公司 http://www.wanjunda.com						图号 (DWG NO)		单位(UNIT) : MM	
						版本 (REV)		比例(SCALE) 1:1	
						日期 (DATE)			
品名 (ITEM NO)		B母90度弯脚				设计 (DESIGN)			
料号 (PART NO)		USB2.0-BF-WCS-JB				审核 (CHECKED)		TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.X° ±5° X.X° ±2°	
型号(MODEL NO)						核准 (APPROVED)			