

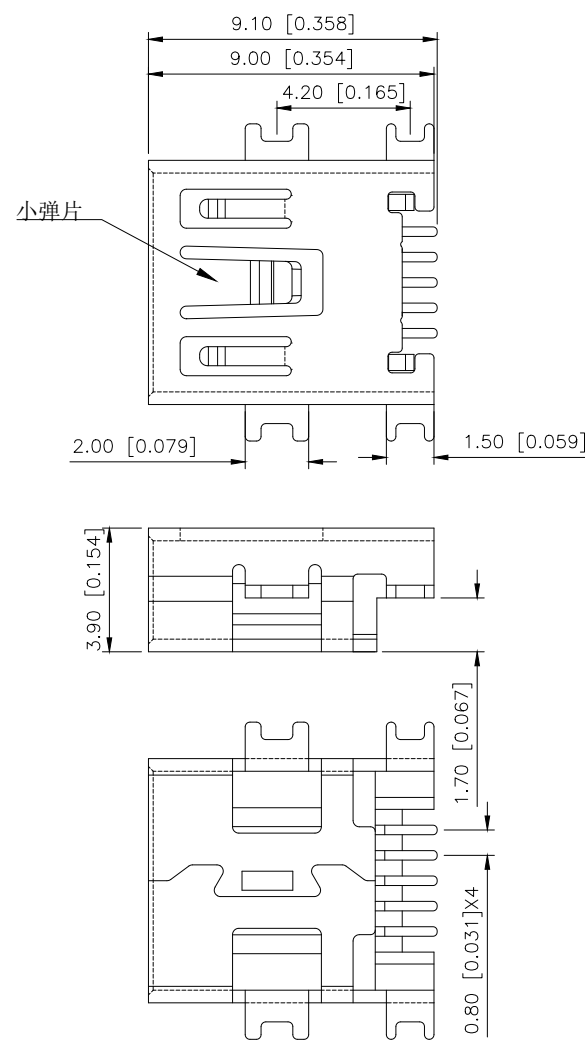
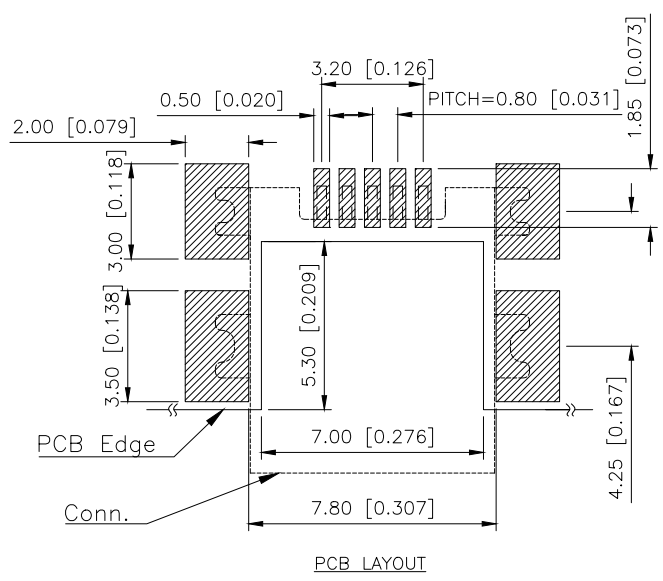


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.11	阿树

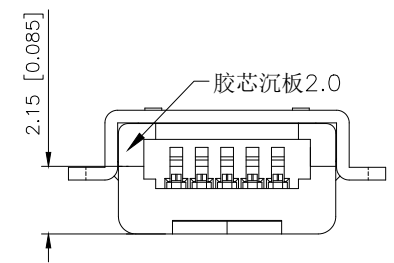

- NOTES:
- 1.ELECTRICAL
 - 1) VOLTAGE CURRENT RATING:10AMP30VAC
 - 2)INSULATION RESISTANCE:100M MINI
 - 3)CONTACT RESISTANCE50mQ MAXE
 - 4)WITHSTANDING VOLTAGE300VAC
 - 5)OPERATING TEMPERATURE-55CT0+85C
 - 2.Mechanical
 - 1)Mating Forcer30N MAX
 - 2)Unmating Force 7N MIN.
 - 3.DIMENSIONS MARKED "TO BE CHECKED BY QC&IPQC
 - 4.PART NO.

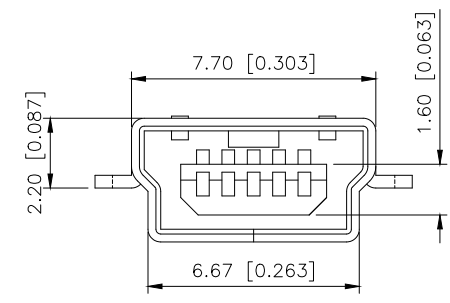

U213-05XN-4BH84

1:AU 1U"
5:AU 15U"
6:AU 30U"

1:PBT
2:PA6T
3:PA9T
4:LCP

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: MINI USB
CHECKED		UNIT: mm/in	PART NO.: U213-05XN-4BH84
APPROVED		SIZE: A4	DWG NO.: