

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20



BY -

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	16APR2015	GY	CW
	B	ECR-15-013759	12OCT2015	DW	CW
	BI	ECR-16-015492	16NOV2016	QY	CW



TYPE-1,T2040064101-000,TE LOGO
类型-1,T2040064101-000,TE LOGO

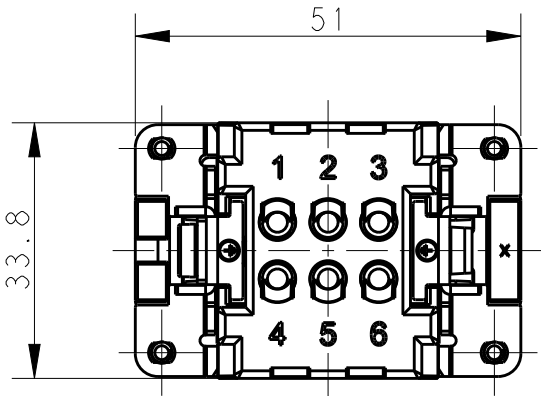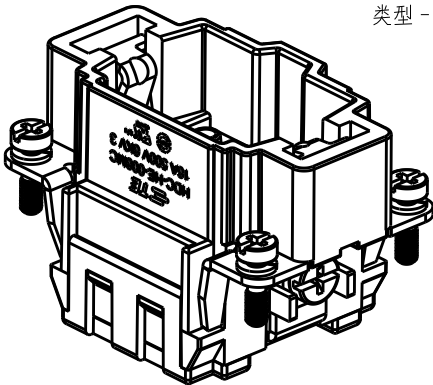

M4 SCREW,RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝,推荐锁紧力矩1.2Nm

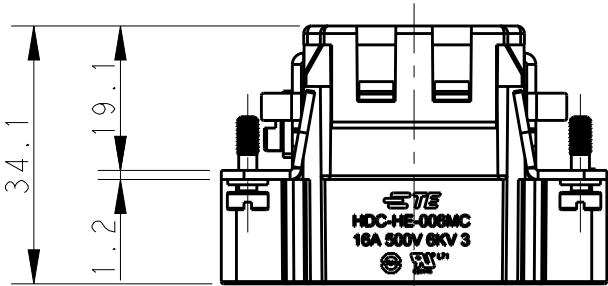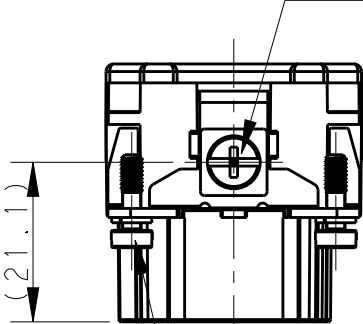

4X M3 SCREW,RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝,推荐锁紧力矩0.5Nm

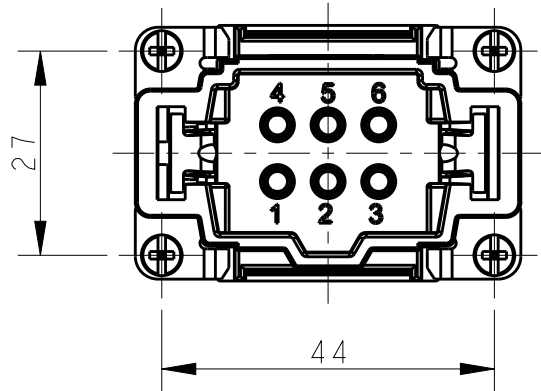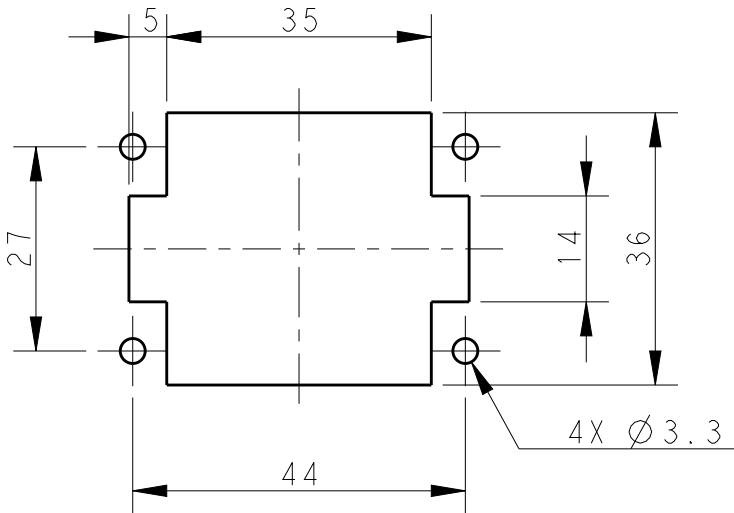


- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
 - CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

PANEL CUT FOR INSERTS FOR USING
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± 0.1
1 PLC ± 0.1
2 PLC ± 0.1
3 PLC ± 0.1
4 PLC ± 0.1
ANGLES ± 0.5

MATERIAL

-

FINISH

-

DWN 05APR2015

Gino.Yao

CHK 05APR2015

Chris.Wang

APVD 05APR2015

Xiang.Xu

PRODUCT SPEC

108-137044

APPLICATION SPEC

114-137044

WEIGHT

-

Customer Drawing



TE Connectivity

NAME

HE-006-MC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-T2040064101000

-

SCALE

1:1

SHEET

1 OF 2

REV

B1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS






P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE:

SEE SHEET 1

注释:

见页 1

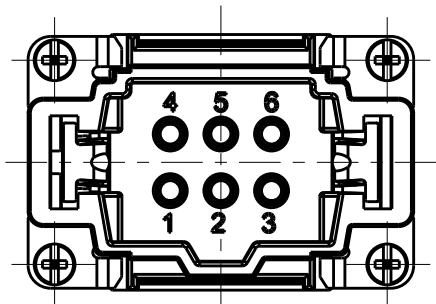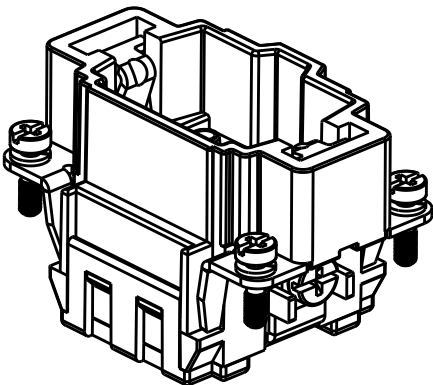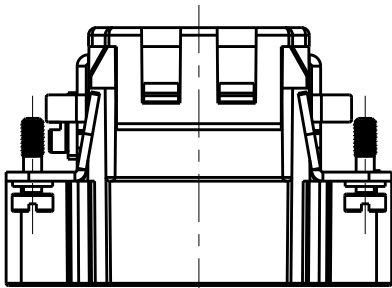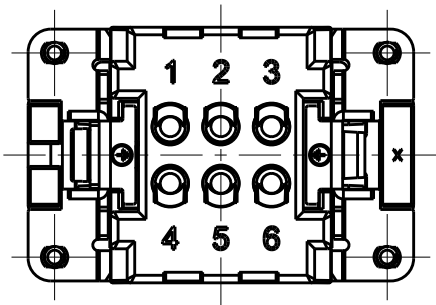

TYPE-2,T2040064101-001,STAINLESS STEEL SCREW,NO LOGO
类型-2,T2040064101-001,不锈钢螺丝,无LOGO

ALL SPEC DIMENSION REFER TO TYPE 1
所有产品规格尺寸参照 TYPE 1

T2040064101-001	HE-006-MC	HE-006 MALE INSERT,CRIMPING, STAINLESS STEEL SCREW,NO LOGO HE-006公插,冷压针,不锈钢螺丝,无LOGO	TYPE-2 类型-2
T2040064101-000	HE-006-MC	HE-006 MALE INSERT,CRIMPING HE-006公插,冷压针	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 05APR2015	 TE Connectivity		
		CHK Chris.Wang 05APR2015			
		APVD Xiang.Xu 05APR2015			
		PRODUCT SPEC 108-137044			
		APPLICATION SPEC 114-137044	NAME HE-006-MC		
		WEIGHT -	SIZE A3	CAGE CODE 00779	RESTRICTED TO -
		Customer Drawing	SCALE 1:1	SHEET 2 OF 2	REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2040064101-000](#)