






RoHS

MAPX



MODIFICATION

DRW

DATE

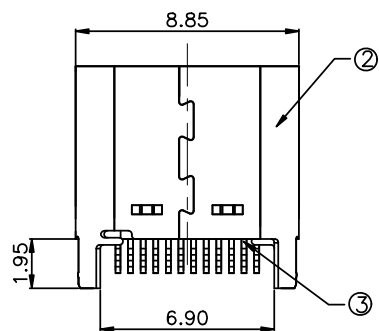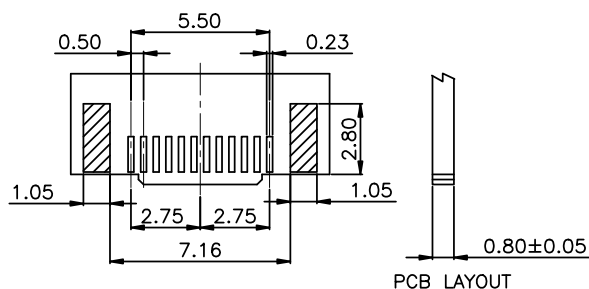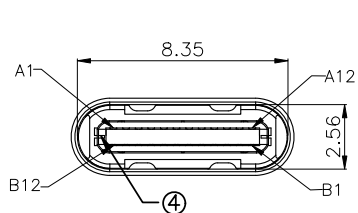

Remark:
Main Features:
1.Current Rating:5A
2.Contact Impedance:40mΩ MAX
3.Insulation Resistance:100MΩ MIN 100V DC
4.Wetting Property:Temperature245±5℃, time of 3~5s
5.Mechanical Characteristics:
Insertion Force:5~20N
Extraction Force:Initial:8~20N;Durability:6~20N(1000cycles)
6.Life Test:10000 cycles min
7.All products meet environmental standards of ROHS

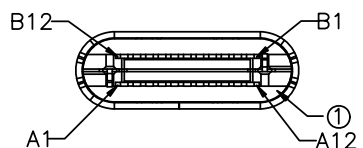

④	EMI LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL,TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	24	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL,GOLD PLATING AT - CONTACT AREA,LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	SEE DRW NO.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	SEE DRW NO.
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SUB1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SUB2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.35	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.20	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	L-S-S	制图料号 PRODUCT PART NO.	918-418K2022E40001
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	type-c3.1母头直立式6.85 夹板0.8不锈钢1cp黑胶24pin
日期 DATE	2021-03-10	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0