

1

2

7

8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

A





B

C


D

E


F

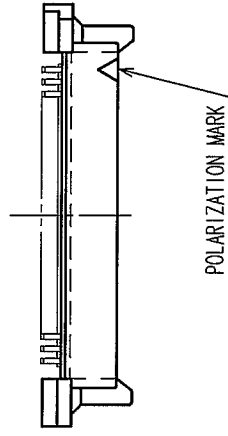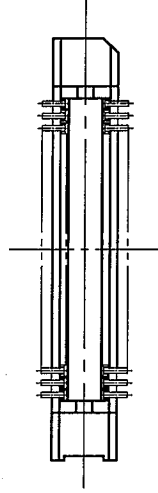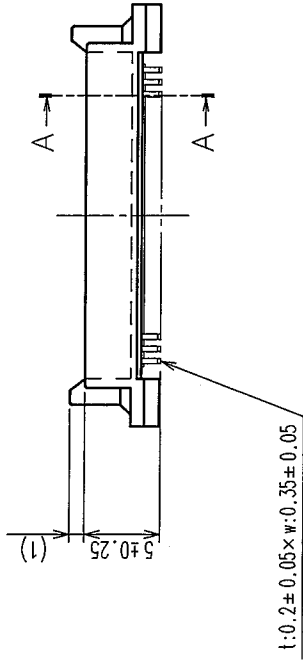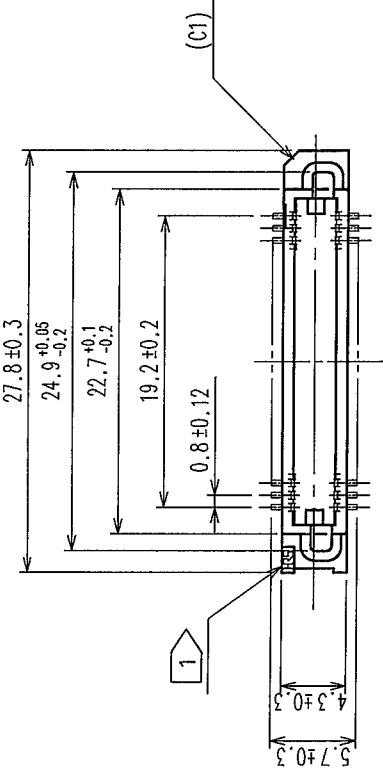

RECOMMENDED P.C.B. LAND PATTERN (MOUNT SIDE)

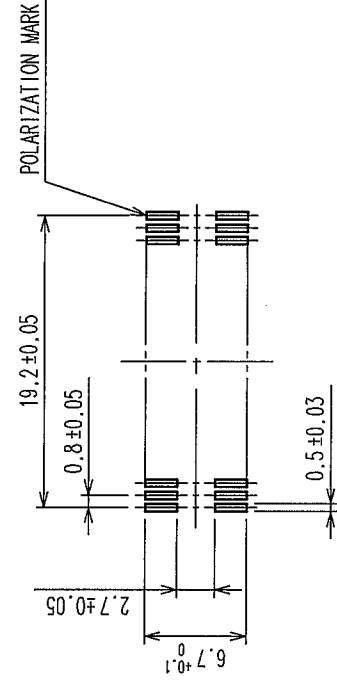

A-A(10:1)

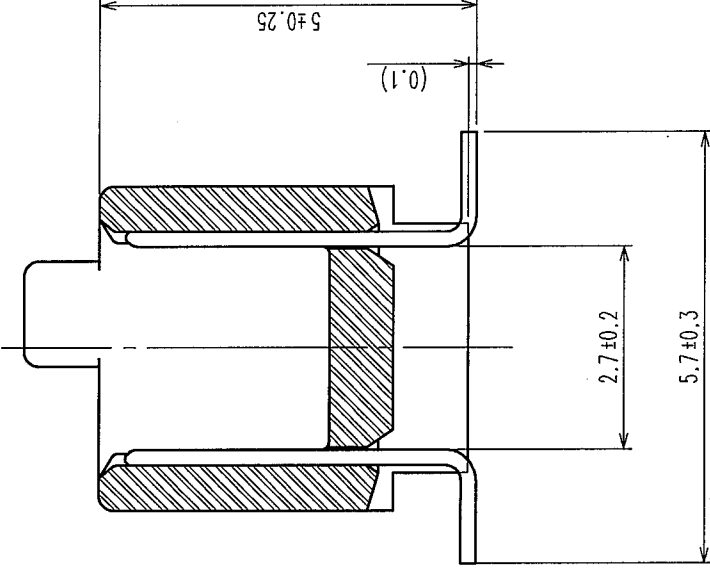

NOTE 1 HRS MARK SHALL BE OPTIONAL.

- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- 4 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
- 5 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
- 6 SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
- FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

HRS DRAWING FOR REFERENCE

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μ m min. LEAD AREA : TIN-PLATING 1μ m min. UNDER PLATING : NICKEL 1μ m min.			
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS			
CODE NO. (OLD) CL		DRAWN Y. AOYAGI '05.09.15		DESIGNED Y. Aoyagi '05.09.26		CHECKED K. Oyama '05.09.26		APPROVED H. Kawa '05.09.26	
								RELEASED	
		DRAWING NO. EDC3-071643-23		PART NO. FX6A-50P-0.8SV1(93)					
SCALE 2 : 1									
UNITS mm		HIROSE ELECTRIC CO., LTD		CODE NO. CL576-0224-8-93		1/2			

1

2

3

4

5

6

7

8

HRS

