


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #		WIRE RANGE mm ²	COLOR CODE	DIMENSIONS mm	
PREFIX	PK			A ±0,51	B
BSMV1BX	-XY -LY -MY	0,5-1,5	RED	26,6 (1.04)	4,3 (.17)
BSMV2BX	-X -L -M	1,5-2,5	BLUE	26,6 (1.04)	5,1 (.20)
BSMV6X	-X -Q	*2,5-6,0	YELLOW	30,0 (1.18)	6,4 (.25)

FUNNEL WIRE
ENTRY

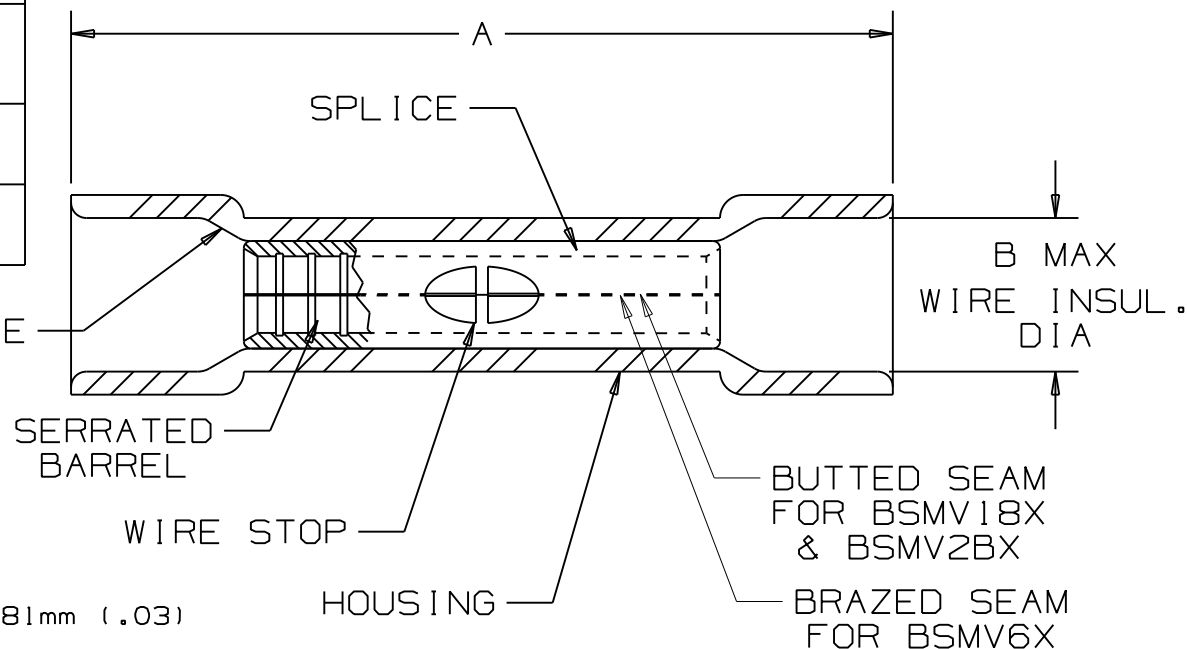

NOTES:

1. USED FOR:

- A. 600V MAX. VOLTAGE RATING
- B. 105°C (221°F) MAX. TEMP. RATING
- *C. STRANDED COPPER WIRE (4,0-6,0mm² FOR CT-1551M)

2. MATERIAL:

- A. STAMPING (0,5-1,5 & 1,5-2,5) - 0,81mm (.03) THK COPPER, TIN PLATED
- B. STAMPING (2,5-6,0) - 1,02mm (.04) THK COPPER, TIN PLATED
- C. HOUSING- VINYL

3. DIMENSIONS IN BRACKETS ARE IN INCHES

4. PACKAGE QTY:

-X, -X=10, -Q=25, -L, -LY=50, -D=500, -M, -MY=1000

5. WIRE STRIP LENGTH: 7,9⁺⁸₋₀ (5/16^{+1/32}₋₀)

6. INSTALLATION TOOLS: REF. DWGS.

A41522, A41523, A41524, A41525

11	8/09	BCT		REMOVED BSMV6X-D			
10	8/09	BCT		MODIFIED BSMV1BX PKG CODE TO -LY			
09	10/8	SRB		Removed "C" packaging code and replaced with "L"&"Q" packaging code.			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

EXPANDED VINYL INSULATED
METRIC BUTT SPLICES

DRAWN BY	CHK'D	SCALE	DRAWING NO.
BDK		NONE	A41420