



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

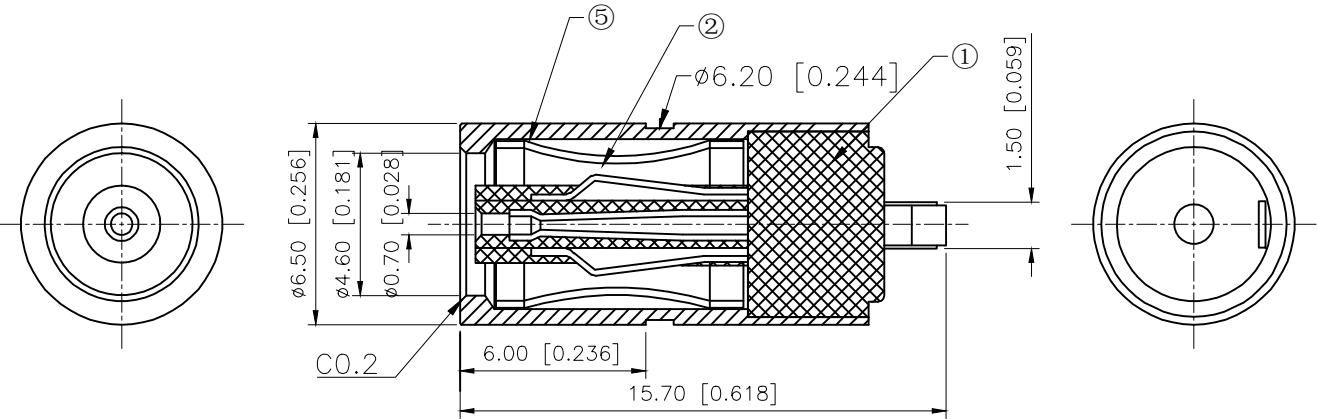

Technolo Request:
1.Outlook:
NO burr,no hurt.
2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30MΩ;
3.Insertion fore & withdrawal force;0.3—3kgf.
4.Salt spray test :24H.

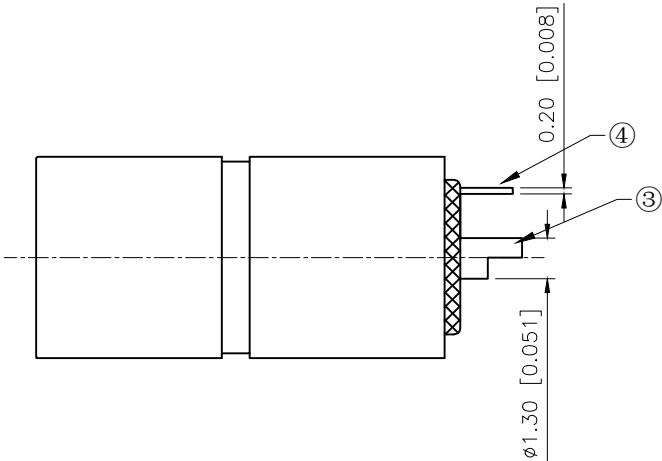

Waterproof tube	C3604	Ni
Spring	Phosphor Bronze	Ni
Shrapnel	Phosphor bronze	Ni
Terminal	Phosphor bronze	Ni
Plastic	PBT	Black
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	DC POWER JACK
PART NO.:	DC-F0765
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1