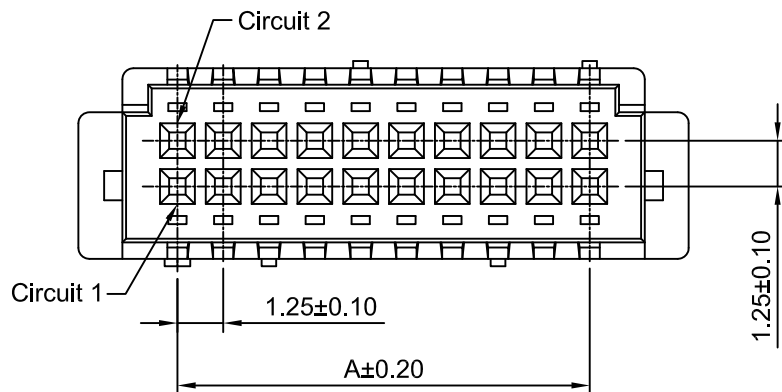


Ordering Information:

A1252H-2xXP - ***

1 2

1.Part NO.

2.Material:


(Blank): Nylon 66,UL94V-0(Gray)

GF20: Nylon 66 +20%GF,UL94V-0(Beige)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	5.00	10.40	2x17P	20.00	25.40
2x6P	6.25	11.65	2x18P	21.25	26.65
2x7P	7.50	12.90	2x20P	23.75	29.15
2x10P	11.25	16.65	2x21P	25.00	30.40
2x15P	17.50	22.90	2x25P	30.00	35.40

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 2	1.25mm PITCH HOUSING		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin	DRAWING NO. A1252H-2xXP		
General Tolerances					REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION		


REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2023.04.04
A2	CHANGE THE DRAWING	2022.11.05
A1	CHANGE THE DRAWING	2022.07.26
A0	NEW RELEASE	2005.05.10




2x5P




2x6P

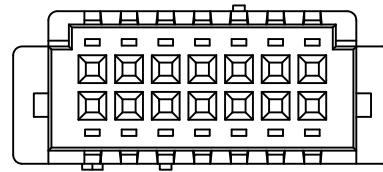


2x7P

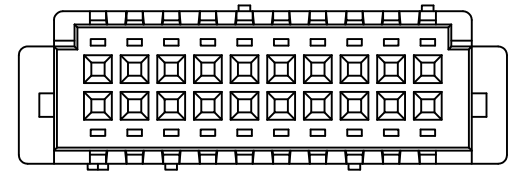


2x10P

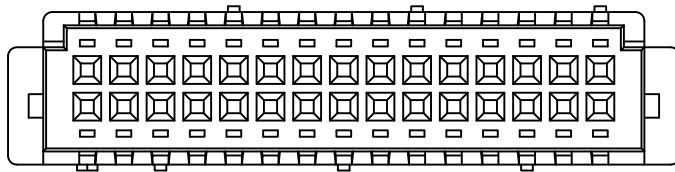


2x15P

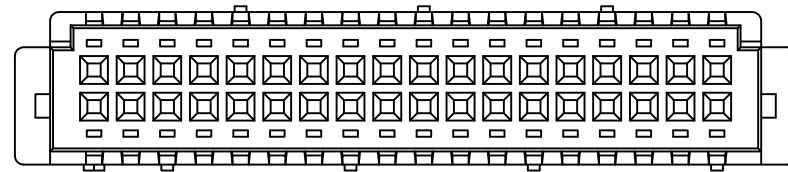


2x18P

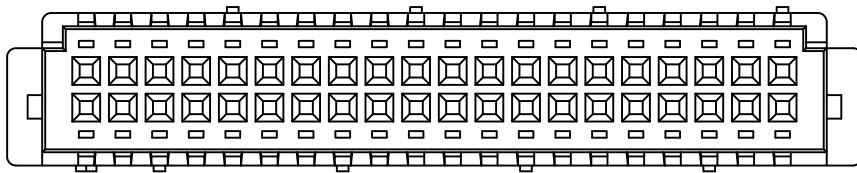

2x20P

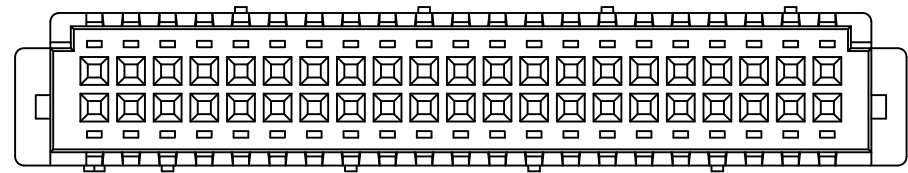

2x21P

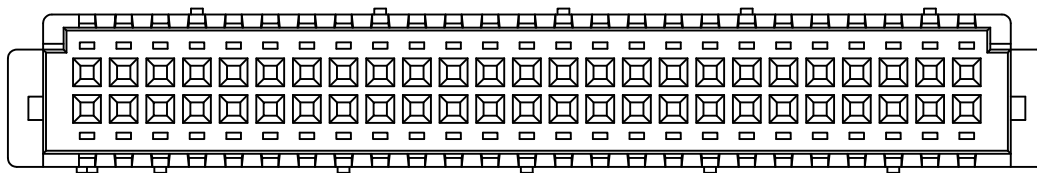

2x25P

A3	CHANGE THE DRAWING	2023.04.04
A2	CHANGE THE DRAWING	2022.11.05
A1	CHANGE THE DRAWING	2022.07.26
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 1.25mm PITCH HOUSING	
mm	5:1	2 of 2		
DRAWN	CHKD	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1252H-2xXP	
x,xx±0,25 x,xxx±0,20 x,xxxx±0,15 ANGLES ±1°				
			REV A3	