

Actuator

17-030352

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-030352>

Your product:



17-030352

Actuator

FRONT

Front form:	round
Front dimension:	Ø 7 mm
Reflector:	Metal, polished chromium-plated, internal

MOUNTING

Design:	raised
Mounting cut-out:	Ø 6 mm

OPERATING-/INDICATION PART

Illumination colour:	Yellow
----------------------	--------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V AC/DC ± 10 %
Operation current:	15 mA ± 15 %
Lumi. Intensity:	6 mcd

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.003 kg
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Storage temperature:	– 25 °C ... + 80 °C
Operating temperature:	– 20 °C ... + 60 °C

CERTIFICATE

Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)


OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
---------------	--


Kind of illumination:	Single-LED
------------------------------	------------

Short Description:	Actuator, Ø 6 mm, Ø 7 mm, round, Plug-in terminal, 2 x 0.5 mm, Yellow
---------------------------	---


Wiring diagrams:

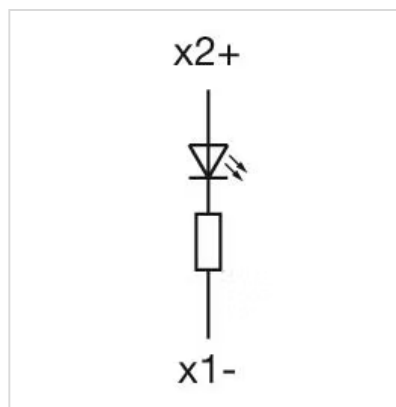

Mounting cut-outs:

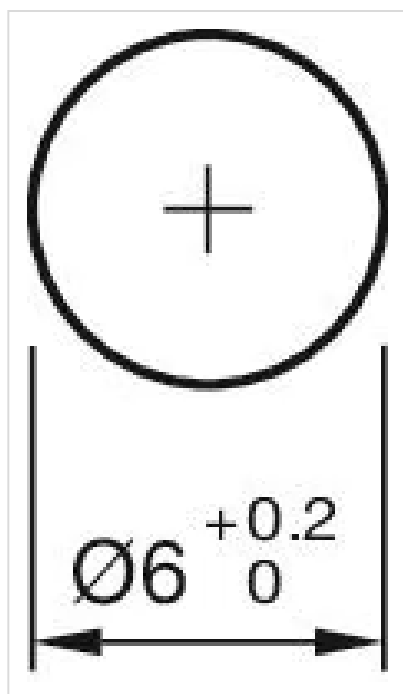

Dimension drawings:

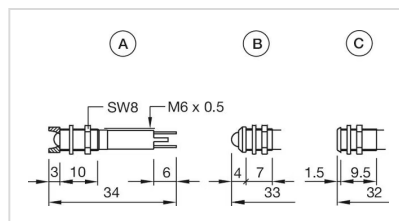

A = interior
B = exterior
C = superflat