


DESCRIPTION:


PxxxxEB series thyristors are a type of semiconductor component. They are designed in applications: modems, telephones, line cards, answering machines, FAX machines, SLICs, T1/E1, xDSL, PBXs and more.



TO-92-2L

FEATURES:

- Excellent capability of absorbing transient surge.
- Quick response to surge voltage (ns Level).
- Eliminates overvoltage caused by fast rising transients.
- Moisture sensitivity level: Level 1.
- Non degenerative.
- Package way: 1000pcs/bag.

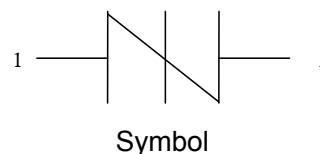


ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise noted)


Parameter	Symbol	Value	Unit
Storage temperature range	T _{STG}	-60 to +150	°C
Operating junction temperature range	T _J	-40 to +125	°C
Peak pulse current@10/1000μs	I _{PP}	80	A
Surge on-state current non-repetitive one cycle peak value (50Hz)	I _{TSM}	30	A
Critical rate-of-rise of on-state current	di _T /dt	500	A/μs

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Symbol	Parameter
V _{DRM}	Peak off-state voltage
I _{DRM}	Off-state current
V _S	Switching voltage
I _S	Switching current
V _T	On-state voltage
I _T	On-state current
I _H	Holding current
C _O	Off-state capacitance

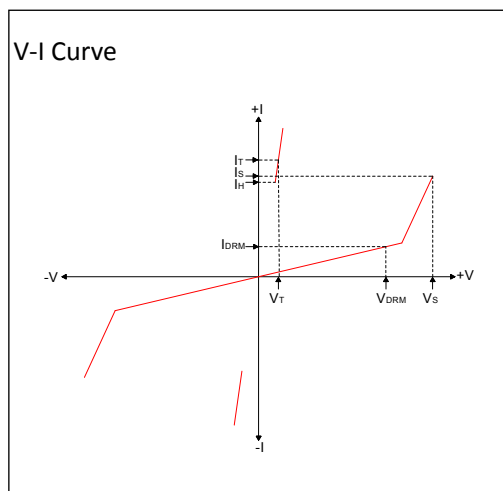

MARKING



P0080EB: Device Marking Code
XX: The production cycle

ELECTRICAL CHARACTERISTICS (T_A=25°C, continued)

Part Number	I _{DRM} @V _{DRM}		V _S ^① @I _S		V _T @I _T		I _H	Co ^②	Marking
	μA	V	V	mA	V	A	mA	pF	
	max	min	max	max	max	max	min	max	
P0080EB	1	6	15	800	4	2.2	50	100	P0080EB
P0300EB	1	25	40	800	4	2.2	50	80	P0300EB
P0640EB	1	58	77	800	4	2.2	120	80	P0640EB
P0720EB	1	65	87	800	4	2.2	120	75	P0720EB
P2300EB	1	190	260	800	4	2.2	120	50	P2300EB
P2600EB	1	220	300	800	4	2.2	120	45	P2600EB
P3100EB	1	275	350	800	4	2.2	120	45	P3100EB
P3500EB	1	320	400	800	4	2.2	120	40	P3500EB

① V_S is measured at 100KV/s

② Off-state capacitance is measured in V_{DC}=2V, V_{RMS}=1V, f=1MHz

SURGE RATINGS (Temperature range: -40 ~+85°C)

Series	I _{PP} (A) min			
	2/10μs	8/20μs-1.2/50μs	5/310μs-10/700μs	10/1000μs
B	250	250	100	80

ORDERING INFORMATION

P	008	0	E	B
Series code P: SIDAC	Median voltage	0: Bi-direction 1: Uni-direction	Surge ratings:4KV(10/700μs)	Package type:TO-92-2L

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.2)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L)to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L) (Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

FIG.1: $t_r \times t_d$ pulse waveform

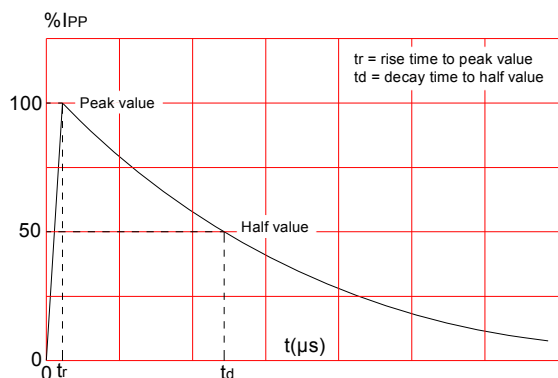


FIG.2: Reflow condition

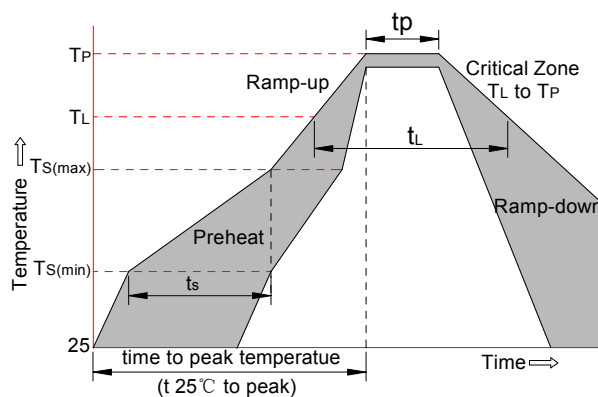


FIG.3: Normalized V_s change vs. junction temperature




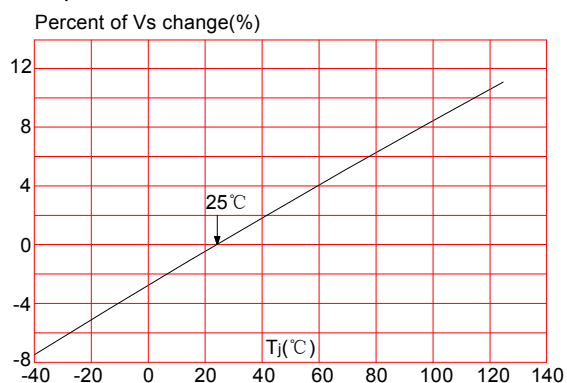


FIG.4: Normalized DC holding current vs. case temperature

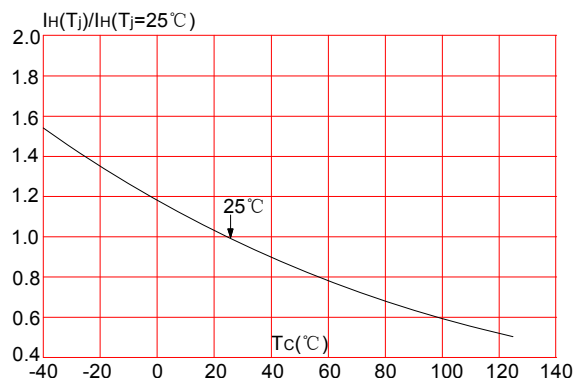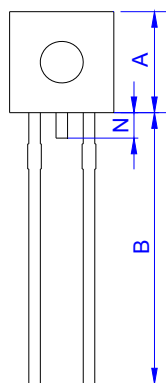

PACKAGE MECHANICAL DATA



TO-92-2L

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.32	5.33	0.170	0.210
B	12.70	15.00	0.500	0.591
D	2.41	2.67	0.095	0.105
E	-	4.3	-	0.169
F	1.16	1.37	0.046	0.054
G	3.18	4.19	0.125	0.165
H	2.04	2.66	0.080	0.105
J	4.45	5.20	0.175	0.205
K	2.04	2.66	0.080	0.105
L	0.41	0.53	0.016	0.021
M	0.36	0.50	0.014	0.020
N	-	1.52	-	0.060