


## Series 95-FL


### Type 950-NLFL-DS

5 mm spacing • 2 to 12 poles

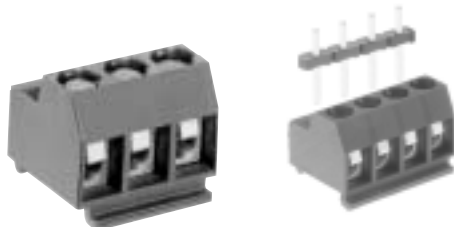

950-NLFL-DS

One possible variation of assembly

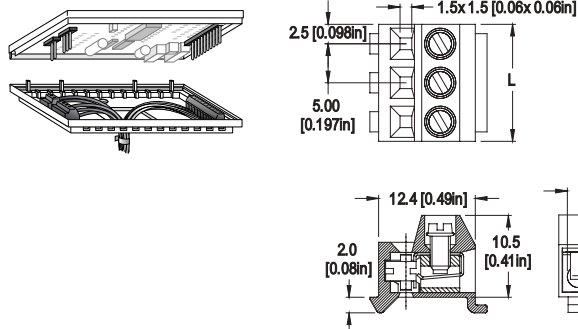

Dimensions: mm (in.) When locating connector, allow 0.5 mm clearance around it for process-induced variations.  
Length of Connector (L) L = No. of Poles x Center to Center Spacing

#### DESCRIPTION

This two piece connector was designed for the HVAC industry, and allows external wiring to be connected to type 950-NLFL-DS which is mounted to a slot in the base plate by means of a locking foot. The cover is equipped with type 971-SLK pinstrip which is soldered to a printed circuit board. Contact is made when the cover and base plate are assembled.

- Plug
- Plug-In Direction Perpendicular to PCB and Wire Entrance Parallel to PCB when plugged with 971-SLK /-SLS /-SLW
- With locking foot

#### TECHNICAL DATA

Center to Center Spacing: 5 mm (0.197 in.) Wire Stripping length: 6 mm (0.25 in.)  
Nominal Cross Section: 1.5 mm<sup>2</sup> (2325 mils<sup>2</sup>)

#### APPROVAL INFORMATION

	Rating	Current (A)	Voltage (V)	AWG	Application Group	Screw Tightening Torque
File No.: E69841	UL	10	300	26-14	B,C	max. 3.5 lbf.in.
File No.: LR24322	CSA	10	300	26-14	B,D,E	max. 0.4 Nm

Rated Impulse Withstand Voltage: 2500 V

#### MATERIAL

MOLDING: Polyamide, self extinguishing to UL 94, V-0, black

TEMPERATURE LIMITS: Short time: 140°C (284°F)  
Continuous: RTI 105°C (221°F)  
Low limit: -40°C (-40°F)  
Comparative Tracking Index: CTI > 600  
Oxygen Index Rating: 32%

Terminal Body: nickel plated copper alloy

Wire Protector: tin plated copper alloy

Screw: yellow chromate passivated, zinc plated, steel, M2.6

#### ACCESSORIES

- BST Self Adhesive Marking Strips. Consecutively numbered.
- Jumper, Type 970-J1.

#### OPTIONS See How to Order. If more than one option is required, please separate each option with a dash (-).



CN: Consecutive Numbering (hot stamped White numbers)  
SM: Special Marking (please provide sketch)  
G05: Gold Plating (5 micro inches)  
G30: Gold Plating (30 micro inches)  
S30: Silver Plating (30 micro inches)  
(Plated components: wire protector)

#### HOW TO ORDER

POLES:	OPTIONS:
02 to 12	CN, SM, G05, G30, S30
950-NLFL-DS/	-


www.weco.ca/products/950-NLFL-DS



## Series 95-FL


### Type 950-GFL-DS

5 mm spacing • 2 to 24 poles

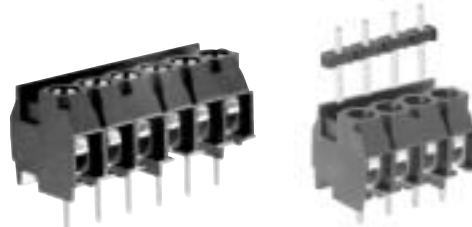

950-GFL-DS

One possible variation of assembly

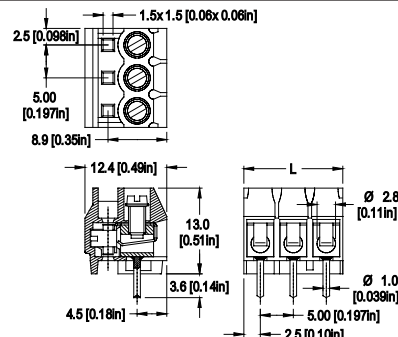

Dimensions: mm (in.) When locating connector, allow 0.5 mm clearance around it for process-induced variations.  
Length of Connector (L) L = No. of Poles x Center to Center Spacing

#### DESCRIPTION

The design for this plug and pinstrip combination was created for the HVAC industry and allows for the interconnection of two printed circuit boards.

- Plug
- Plug-In Direction Perpendicular to PCB and Wire Entrance Parallel to PCB when plugged with 971-SLK /-SLS /-SLW
- With solder pin

#### TECHNICAL DATA

Center to Center Spacing: 5 mm (0.197 in.) Wire Stripping length: 6 mm (0.25 in.)  
Nominal Cross Section: 1.5 mm<sup>2</sup> (2325 mils<sup>2</sup>) Recommended Hole Ø in PCB: 1.3 mm (0.051 in.)

#### APPROVAL INFORMATION

	Rating	Current (A)	Voltage (V)	AWG	Application Group	Screw Tightening Torque
File No.: E69841	UL	10	300	26-14	B,C	max. 3.5 lbf.in.
File No.: LR24322	CSA	10	300	26-14	B,D,E	max. 0.4 Nm

Rated Impulse Withstand Voltage: 2500 V

#### MATERIAL

Self extinguishing to UL 94, V-0, grey

MOLDING: 2 to 12 pole: Polyamide 13 to 24 pole: Polyamide (glass fiber reinforced)

TEMPERATURE LIMITS: Short time: 140°C (284°F) 200°C (392°F)  
Continuous: RTI 105°C (221°F) RTI 105°C (221°F)  
Low limit: -40°C (-40°F) -40°C (-40°F)  
Comparative Tracking Index: CTI > 600 CTI > 175  
Oxygen Index Rating: 32% 32%

Terminal Body: nickel plated copper alloy

Wire Protector: tin plated copper alloy

Screw: yellow chromate passivated, zinc plated, steel, M2.6

Solder Pin: tin plated copper alloy, Ø 1.0 mm (0.04 in.)

#### ACCESSORIES

- BST Self Adhesive Marking Strips. Consecutively numbered.
- Jumper, Type 970-J1.

#### OPTIONS See How to Order. If more than one option is required, please separate each option with a dash (-).



CN: Consecutive Numbering (hot stamped White numbers)  
SM: Special Marking (please provide sketch)  
PS: Clear chromate passivated, zinc plated, steel screws  
G05: Gold Plating (5 micro inches)  
G30: Gold Plating (30 micro inches)  
S30: Silver Plating (30 micro inches)  
XXMM: Longer Solder Pins up to 75 mm (3 in.), XX = protruding length of pins, in millimeters  
(Plated components: wire protector)

#### HOW TO ORDER

POLES:	OPTIONS:
2 to 24	CN, SM, PS, G05, G30, S30, XXMM
950-GFL-DS/	-

www.weco.ca/products/950-GFL-DS