


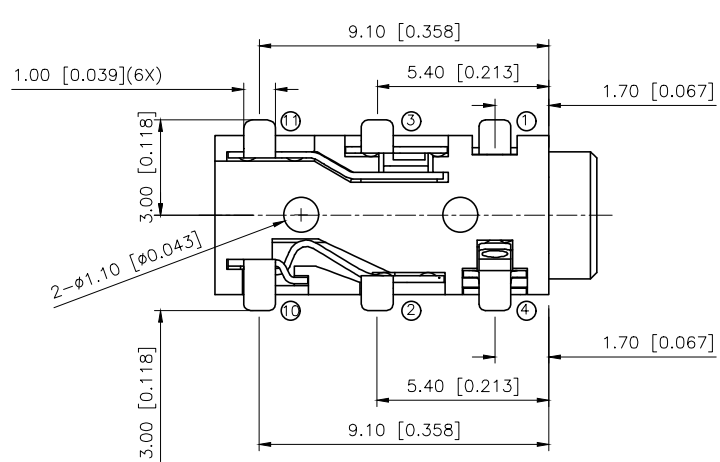
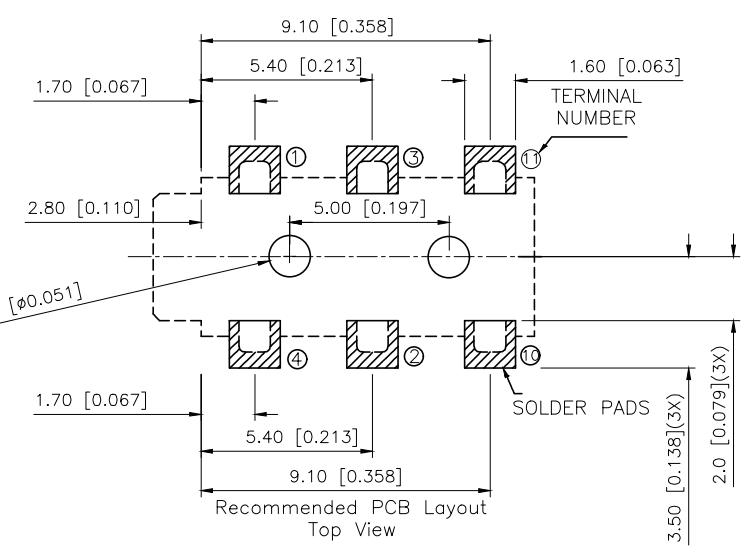
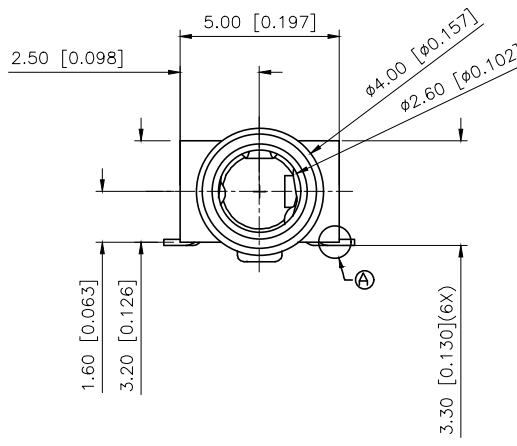


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

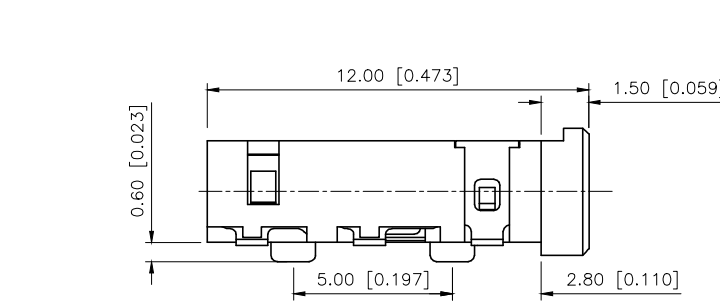

Model No.	PJ-242A-SMT	PJ-242B-SMT	PJ-242C-SMT	PJ-242D-SMT
Schematic				
PIN				
1	sleeve	sleeve	sleeve	sleeve
2	tip	tip	tip	tip
3	ring 1	ring 1	ring 1	ring 1
4	ring 2	ring 2	ring 2	ring 2
10	NP	tip switch	NP	tip switch
11	NP	NP	ring 1 switch	ring 1 switch



Plastic	High Temp. Thermoplastic	
Terminal 11	Phosphor Bronze	Gold
Terminal 10	Phosphor Bronze	Gold
Terminal 4	Phosphor Bronze	Gold
Terminal 3	Phosphor Bronze	Gold
Terminal 2	Phosphor Bronze	Gold
Terminal 1	Phosphor Bronze	Gold
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-242X-SMT
APPROVED		SIZE:	A4	DWG NO.:	