
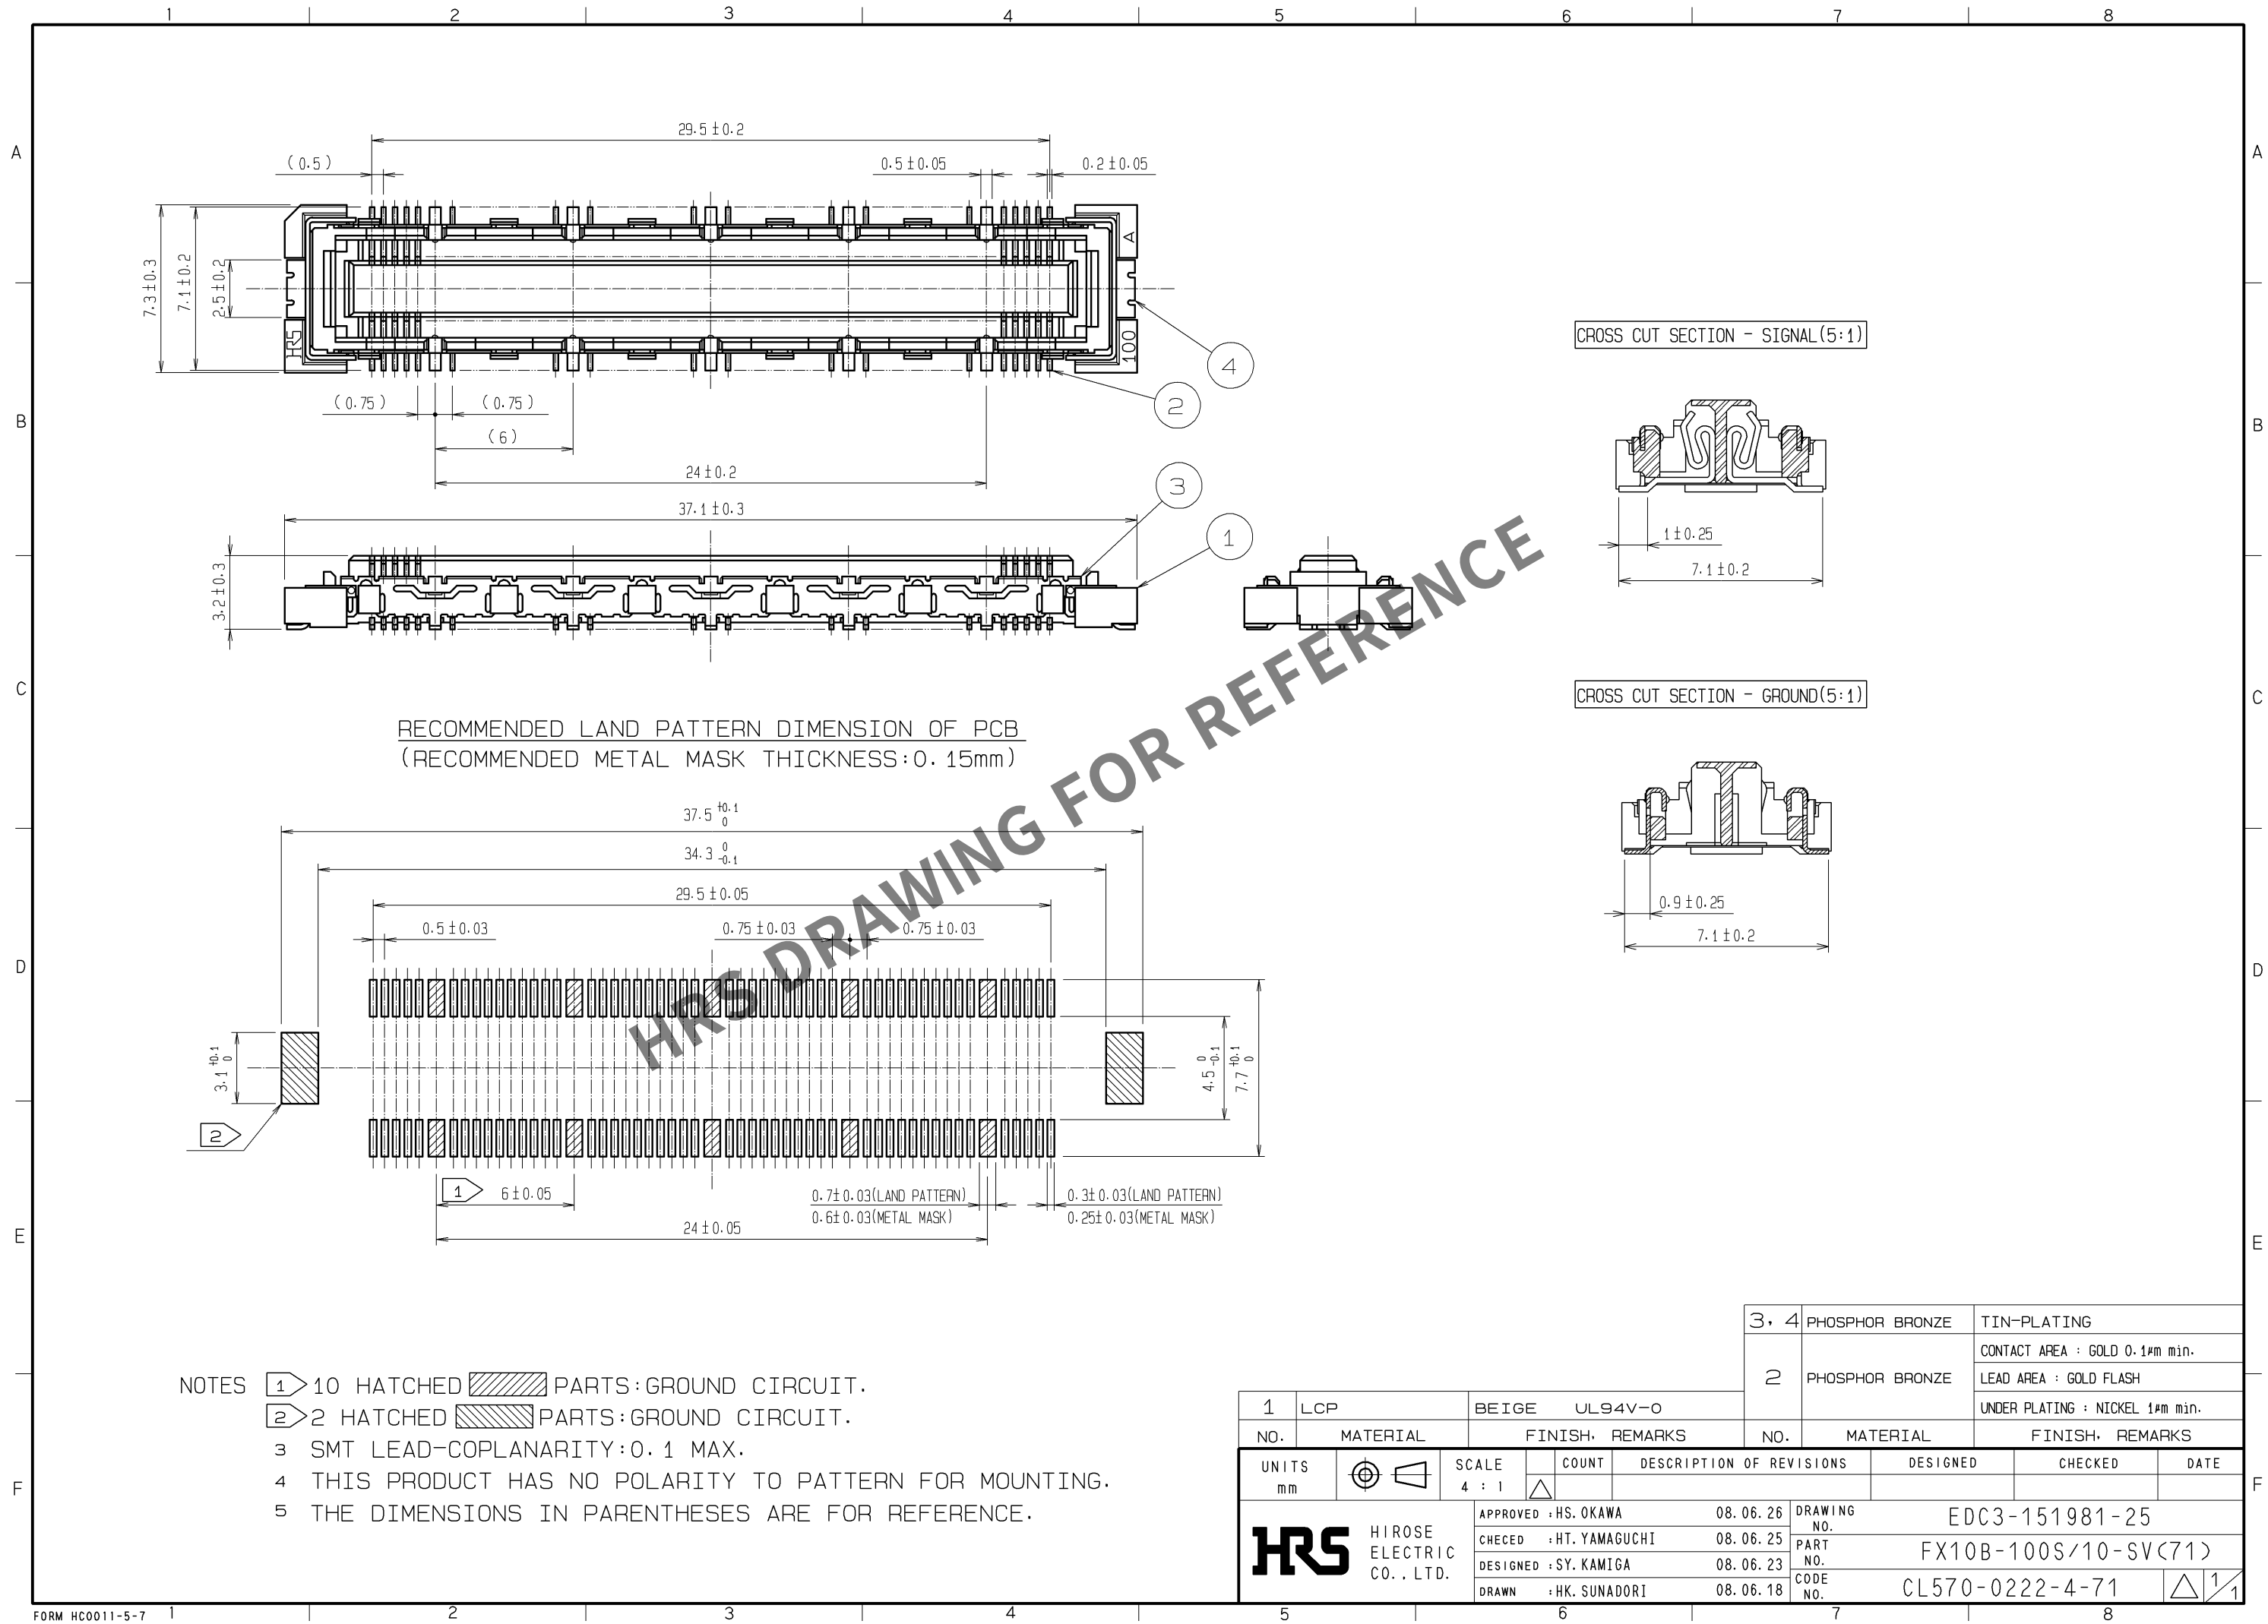


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

- NOTES
- ① 10 HATCHED  PARTS:GROUND CIRCUIT.
 - ② 2 HATCHED  PARTS:GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY:0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

					3, 4	PHOSPHOR BRONZE	TIN-PLATING			
						2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.		
								LEAD AREA : GOLD FLASH		
								UNDER PLATING : NICKEL 1μm min.		
1	LCP	BEIGE UL94V-0								
NO.	MATERIAL	FINISH, REMARKS			NO.	MATERIAL	FINISH, REMARKS			
UNITS mm			SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : HS. OKAWA		08.06.26	DRAWING NO. EDC3-151981-25				
			CHECED : HT. YAMAGUCHI		08.06.25	PART NO. FX10B-100S/10-SV(71)				
			DESIGNED : SY. KAMIGA		08.06.23	CODE NO. CL570-0222-4-71				
			DRAWN : HK. SUNADORI		08.06.18	 1/1				