


Male headers

SL 18 108 10 G

Insertion side "dimension C" changeable, square 0.635 mm

add to

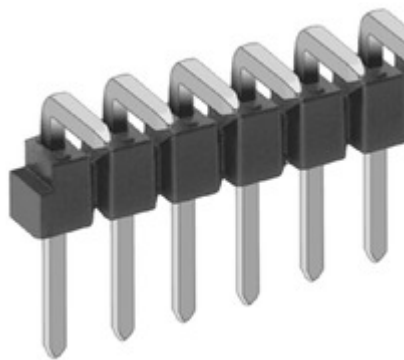

Features	Technical Drawing	Variants	Accessories / related products
no. of contacts	10		
contact material	CuSn alloy		
surface contact / contact sleeve	Ni+0,2µm Au Ni + 4 ... 6 µm Sn		
surface of contact	gold-plated		
volume resistivity	≤5 mΩ		
nominal current	3 A		
nominal voltage	250 V AC		
test voltage	2000 V		
material isolation body	PA 4.6, GF		
temperature range	-40 °C ... +163 °C (260 °C / 10 s)		
class of flammability	UL 94 V-0		
insulation resistance	>10 ¹² Ω		
connection type	soldering		
version	insertion side "dimension C" changeable, "S" selective gold-plated		
reflow solderable	yes		