

Products Available From



## **Solid State Relays and I/O Modules**

Catalog 1



## **Automation Controls**

Catalog 2



## **Switches and Sensors**

Catalog 3



## **Motors and Fans**

Catalog 4



## **Pneumatics**

Catalog 5

For your copy of the catalogs, contact



**Tel: (800) 677-5311 / Fax: (800) 677-3865**  
**[www.crouzet-usa.com](http://www.crouzet-usa.com)**

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

**Snap Action Switches:**

|                                                                                  |                                                                    |      |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------|------|
|  | 83132 / 83133 / 83134 Subminiature Double Break Switches . . . . . | 3/2  |
|  | 83170 Subminiature Switches . . . . .                              | 3/6  |
|  | 83180 Sealed Subminiature Switches . . . . .                       | 3/10 |
|  | 83161 Miniature Switches . . . . .                                 | 3/14 |
|  | 83160 Miniature Positive Break Switches . . . . .                  | 3/18 |
|  | 83137 Miniature Side Rotary Switches . . . . .                     | 3/19 |
|  | 83106 / 83109 / 83112 / 83154 Double Break Switches . . . . .      | 3/20 |
|  | 83139 Sealed Double Break Switches . . . . .                       | 3/24 |
|  | 83169 Sealed Miniature Switches . . . . .                          | 3/28 |
|  | 83123 Sealed Flat-Pack Switches . . . . .                          | 3/31 |
|  | 81290 Low Force Position Detectors . . . . .                       | 3/32 |

**Industrial Limit Switches:**

|                                                                                    |                                                                                |      |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------|
|    | 83852 / 83853 Miniature Industrial Limit Switches, Positive Opening . . . . .  | 3/34 |
|   | 83862 Industrial Limit Switches, Positive Opening . . . . .                    | 3/36 |
|  | 83870 Miniature Pre-Cabled Limit Switches, Positive Opening . . . . .          | 3/40 |
|  | 83880 Pre-Cabled Limit Switches, Positive Opening . . . . .                    | 3/42 |
|  | 83800 Miniature Limit Switches . . . . .                                       | 3/44 |
|  | 83731 / 83732 / 83733 Automotive Limit Switches . . . . .                      | 3/46 |
|  | 83589 Automotive Limit Switches . . . . .                                      | 3/47 |
|  | 83581 Sealed Limit Switches, Telescopic-Actuator . . . . .                     | 3/48 |
|  | 83523 / 83528 Door Interlock Switches . . . . .                                | 3/50 |
|  | 83856 / 83857 Manual Reset Positive Opening Miniature Limit Switches . . . . . | 3/52 |
|  | 83841 Waterproof Limit Switch . . . . .                                        | 3/55 |
|  | 83863 / 83864 Cable Pull Limit Switches . . . . .                              | 3/56 |

**Safety (Security) Limit Switches:**

|                                                                                    |                                                                     |      |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------|------|
|  | 838930 / 838931 Miniature Plastic Key Lock Limit Switches . . . . . | 3/58 |
|  | 838932 Solenoid Operated Plastic Key Lock Limit Switches . . . . .  | 3/60 |
|  | 838940 Industrial Metal Key Lock Limit Switches . . . . .           | 3/62 |



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

**Safety (Security) Limit Switches:**

|                                                                                   |                                                                  |      |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------|------|
|  | 838941 Solenoid Operated Metal Key Lock Limit Switches . . . . . | 3/64 |
|  | 83893 Hinged Limit Switches . . . . .                            | 3/66 |
|  | 838942 Cable Pull Limit Switches . . . . .                       | 3/68 |
|  | 838950 / 838951 Foot Switches . . . . .                          | 3/70 |
|  | 79697 E-Stop Switches . . . . .                                  | 3/72 |
|  | 85100 Two-Hand Control Switch . . . . .                          | 3/73 |



**Proximity Sensors:**

|                                                                                     |                                                                                                         |      |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------|
|    | Analog Inductive Proximity Detectors . . . . .                                                          | 3/77 |
|    | Ø4, M5, Ø6, M8 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Stainless Steel . . . . . | 3/78 |
|    | Ø4, M5 M8 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Stainless Steel . . . . .  | 3/78 |
|    | M12 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Stainless Steel . . . . .            | 3/80 |
|    | M12 Inductive Proximity Detectors<br>Cable Output-2 Wire AC Series-Stainless Steel . . . . .            | 3/80 |
|    | M12 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Stainless Steel . . . . .        | 3/81 |
|   | M12 Inductive Proximity Detectors<br>Connectors Output-2 Wire AC Series-Stainless Steel . . . . .       | 3/81 |
|  | M12 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Plastic . . . . .                    | 3/83 |
|  | M12 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Plastic . . . . .                | 3/83 |
|  | M18 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Stainless Steel . . . . .            | 3/84 |
|  | M18 Inductive Proximity Detectors<br>Cable Output-2 Wire AC Series-Stainless Steel . . . . .            | 3/84 |
|  | M18 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Stainless Steel . . . . .        | 3/84 |
|  | M18 Inductive Proximity Detectors<br>Connector Output-2 Wire AC Series-Stainless Steel . . . . .        | 3/84 |
|  | M18 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Plastic . . . . .                    | 3/86 |
|  | M18 Inductive Proximity Detectors<br>Cable Output-2 Wire AC Series-Plastic . . . . .                    | 3/86 |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


**Proximity Sensors:**

|                                                                                     |                                                                                                    |      |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------|
|    | M18 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Plastic .....               | 3/87 |
|    | M30 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Stainless Steel .....           | 3/88 |
|    | M30 Inductive Proximity Detectors<br>Cable Output-2 Wire AC Series-Stainless Steel .....           | 3/88 |
|    | M30 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Stainless Steel .....       | 3/89 |
|    | M30 Inductive Proximity Detectors<br>Connector Output-2 Wire AC Series-Stainless Steel .....       | 3/89 |
|    | M30 Inductive Proximity Detectors<br>Cable Output-3 Wire DC Series-Plastic .....                   | 3/90 |
|    | M30 Inductive Proximity Detectors<br>Cable Output-2 Wire AC Series-Plastic .....                   | 3/90 |
|    | M30 Inductive Proximity Detectors<br>Connector Output-3 Wire DC Series-Plastic .....               | 3/91 |
|    | Inductive Proximity Detector-Flat Pack 55x35 mm .....                                              | 3/92 |
|   | Inductive Proximity Detector 40x40 mm .....                                                        | 3/93 |
|  | M8 Inductive Proximity Detectors<br>Cable Output-2 Wire DC NAMUR Series-Stainless Steel .....      | 3/94 |
|  | M18 Inductive Proximity Detectors<br>Cable Output-2 Wire DC NAMUR Series-Stainless Steel .....     | 3/94 |
|  | M18 Inductive Proximity Detectors<br>Connector Output-2 Wire DC NAMUR Series-Stainless Steel ..... | 3/94 |
|  | M12 Inductive Proximity Detectors<br>Cable Output-2 Wire DC NAMUR Series-Stainless Steel .....     | 3/95 |
|  | M12 Inductive Proximity Detectors<br>Connector Output-2 Wire DC NAMUR Series-Stainless Steel ..... | 3/95 |
|  | M30 Inductive Proximity Detectors<br>Cable Output-2 Wire DC NAMUR Series-Stainless Steel .....     | 3/95 |
|  | M30 Inductive Proximity Detectors-Connector Output<br>2 Wire DC NAMUR Series-Stainless Steel ..... | 3/95 |
|  | Inductive Proximity Detectors for Severe Environments .....                                        | 3/96 |
|  | M18 Capacitive Proximity Detectors<br>Cable Output-3 Wire DC Series-Plastic .....                  | 3/97 |
|  | M18 Capacitive Proximity Detectors<br>Cable Output-2 Wire AC Series-Plastic .....                  | 3/97 |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

**Proximity Sensors:**

|                                                                                   |                                                                                                |       |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------|
|  | M30 Capacitive Proximity Detectors<br>Cable Output-2 Wire AC Series-Plastic .....              | 3/97  |
|  | Capacitive Proximity Detector-Flat Pack 55x35 mm .....                                         | 3/98  |
|  | M30 Programmable Capacitive Proximity Detectors<br>Cable Output-4 Wire DC Series-Plastic ..... | 3/99  |
|  | M30 Programmable Capacitive Proximity Detectors<br>Cable Output-2 Wire AC Series-Plastic ..... | 3/99  |
|  | M8 Connectors .....                                                                            | 3/100 |
|  | M12 Connectors .....                                                                           | 3/101 |
|  | Mounting Flanges .....                                                                         | 3/102 |

**Switches and Sensors Technical References:**

|                                                                                     |                                                          |       |
|-------------------------------------------------------------------------------------|----------------------------------------------------------|-------|
|    | Snap Action Switches-Technical Guide .....               | 3/104 |
|    | Limit Switches-Technical Guide .....                     | 3/111 |
|    | Key-Operated Safety Limit Switches-Technical Guide ..... | 3/113 |
|   | Inductive Proximity Detectors-Technical Guide .....      | 3/115 |
|  | Capacitive Proximity Detectors-Technical Guide .....     | 3/121 |






# Index

| Part Number | Page | Part Number | Page |
|-------------|------|-------------|------|
| 84717389    | 3/90 | 84718506    | 3/97 |
| 84717390    | 3/91 | 84718508    | 3/97 |
| 84717391    | 3/91 | 84718510    | 3/97 |
| 84717392    | 3/91 | 84718511    | 3/97 |
| 84717393    | 3/91 | 84718524    | 3/99 |
| 84717626    | 3/80 | 84718526    | 3/99 |
| 84717627    | 3/80 | 84718528    | 3/99 |
| 84717628    | 3/81 | 84718530    | 3/99 |
| 84717629    | 3/81 | 84718532    | 3/99 |
| 84717630    | 3/81 | 84718534    | 3/99 |
| 84717631    | 3/81 | 84718572    | 3/98 |
| 84717632    | 3/82 | 84718574    | 3/98 |
| 84717633    | 3/82 | 84718578    | 3/98 |
| 84717646    | 3/82 | 84718580    | 3/98 |
| 84717647    | 3/82 | 84718588    | 3/97 |
| 84717648    | 3/82 | 84718589    | 3/97 |
| 84717649    | 3/82 | 84799801    | 3/96 |
| 84717650    | 3/84 | 84799802    | 3/96 |
| 84717651    | 3/84 | 84799803    | 3/96 |
| 84717652    | 3/84 | 84799804    | 3/96 |
| 84717653    | 3/84 | 85100291    | 3/73 |
| 84717654    | 3/85 | 85100292    | 3/73 |
| 84717655    | 3/85 | 85100293    | 3/73 |
| 84717656    | 3/85 | IMB1805T    | 3/77 |
| 84717657    | 3/85 |             |      |
| 84717662    | 3/86 |             |      |
| 84717663    | 3/86 |             |      |
| 84717664    | 3/87 |             |      |
| 84717665    | 3/87 |             |      |
| 84717670    | 3/84 |             |      |
| 84717671    | 3/84 |             |      |
| 84717672    | 3/84 |             |      |
| 84717673    | 3/84 |             |      |
| 84717674    | 3/88 |             |      |
| 84717675    | 3/88 |             |      |
| 84717676    | 3/88 |             |      |
| 84717677    | 3/88 |             |      |
| 84717678    | 3/89 |             |      |
| 84717679    | 3/89 |             |      |
| 84717680    | 3/88 |             |      |
| 84717681    | 3/88 |             |      |
| 84717684    | 3/89 |             |      |
| 84717685    | 3/89 |             |      |
| 84717686    | 3/90 |             |      |
| 84717687    | 3/90 |             |      |
| 84717688    | 3/91 |             |      |
| 84717689    | 3/91 |             |      |
| 84717694    | 3/89 |             |      |
| 84717695    | 3/89 |             |      |
| 84717707    | 3/94 |             |      |
| 84717709    | 3/94 |             |      |
| 84717731    | 3/95 |             |      |
| 84717733    | 3/95 |             |      |
| 84717743    | 3/95 |             |      |
| 84717745    | 3/95 |             |      |
| 84717755    | 3/94 |             |      |
| 84717757    | 3/94 |             |      |
| 84717767    | 3/94 |             |      |
| 84717769    | 3/94 |             |      |
| 84717779    | 3/95 |             |      |
| 84717781    | 3/95 |             |      |
| 84717791    | 3/95 |             |      |
| 84717793    | 3/95 |             |      |
| 84718006    | 3/93 |             |      |
| 84718008    | 3/93 |             |      |
| 84718010    | 3/93 |             |      |
| 84718024    | 3/92 |             |      |
| 84718026    | 3/92 |             |      |
| 84718030    | 3/92 |             |      |
| 84718032    | 3/92 |             |      |
| 84718036    | 3/92 |             |      |
| 84718038    | 3/92 |             |      |
| 84718042    | 3/92 |             |      |
| 84718044    | 3/92 |             |      |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

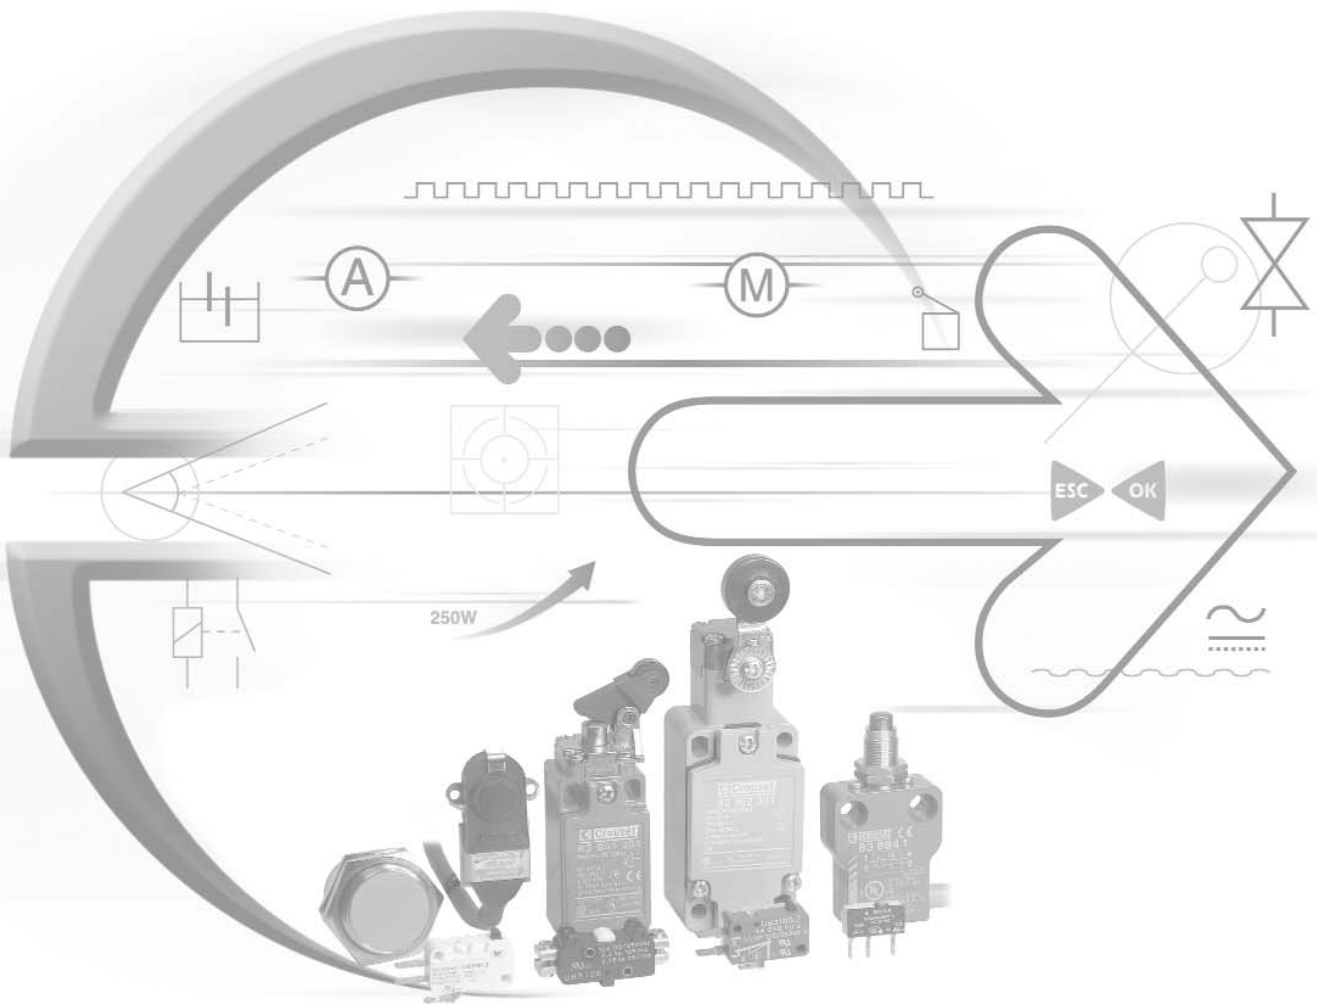

# Snap Action Switches



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

General specifications

Layout



- The NO and NC circuits must both be of the same polarity.

Components

Material


- Case : glass filled polyamide
- Contacts : silver
- Terminals: copper-nickel

Actuator

- Plain : stainless steel
- roller: nylon

Accessories : stainless steel

Operating curve



**Approvals** UL (E42016), CSA (LR - 20918) for others, please consult us.

Types

Features

Electrical characteristics

|                             |         |   |
|-----------------------------|---------|---|
| Current rating at 125-250 V | Nominal | A |
|                             | Thermal | A |

Mechanical characteristics

|                         |            |
|-------------------------|------------|
| Operating force - max.  | N (oz)     |
| Release force min.      | N (oz)     |
| Overtravel max. - force | N (oz)     |
| Maximum rest position   | mm (in)    |
| Tripping point          | mm (in)    |
| Movement differential   | mm (in)    |
| Overtravel - min.       | mm (in)    |
| Operating temperature   | °C (°F)    |
| Mechanical life         | Operations |
| Contact gap             | mm (in)    |
| Weight                  | g (oz)     |

Contact Type

C (Form C) SPDT-DB

Connections

- 83 132 : solder connection -1- only
- 83 133 : solder connection -1- only
- 83 134 : printed circuit board -2- only

Actuators and mounting positions-Factory Mounted Only

Part numbers for standard actuators

Actuators-Length mm (in)

|                       |         |
|-----------------------|---------|
| Tripping point        | mm (in) |
| Operating force max.  | N (oz)  |
| Release force min.    | N (oz)  |
| Pre-travel - max.     | mm (in) |
| Movement differential | mm (in) |
| Total travel max.     | mm (in) |

Part numbers for standard actuators

Actuators-Length mm (in)

|                        |         |
|------------------------|---------|
| Tripping point         | mm (in) |
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Pre-travel - max.      | mm (in) |
| Movement differential  | mm (in) |
| Total travel max.      | mm (in) |

Other information

Also available: 1) Bi-stable operation  
2) NC or NO contacts  
3) Custom Actuators  
Please consult us for other actuators.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



| 1                                            |                                              |                                                |
|----------------------------------------------|----------------------------------------------|------------------------------------------------|
| 83 132 0                                     | 83 133 0                                     | 83 134 0                                       |
| Side terminals                               | Base terminals                               | Face terminals                                 |
| 5                                            | 5                                            | 5                                              |
| 11                                           | 11                                           | 11                                             |
| 1.6 (5.6)                                    | 1.6 (5.6)                                    | 1.6 (5.6)                                      |
| 0.4 (1.4)                                    | 0.4 (1.4)                                    | 0.4 (1.4)                                      |
| 10 (35.3)                                    | 10 (35.3)                                    | 10 (35.3)                                      |
| 8.45 (.33)                                   | 8.45 (.33)                                   | 8.10 (.32)                                     |
| 7.7 <sup>+0.2</sup> (.30 <sup>+0.008</sup> ) | 7.7 <sup>+0.2</sup> (.30 <sup>+0.008</sup> ) | 7.35 <sup>+0.25</sup> (.29 <sup>+0.010</sup> ) |
| 0.45 (.018)                                  | 0.45 (.018)                                  | 0.45 (.018)                                    |
| 0.3 (.012)                                   | 0.3 (.012)                                   | 0.3 (.012)                                     |
| -20 +125 (-4 to +257)                        | -20 +125 (-4 to +257)                        | -20 +125 (-4 to +257)                          |
| 10 <sup>7</sup>                              | 10 <sup>7</sup>                              | 10 <sup>7</sup>                                |
| 0.3 x 2 (.012 x 2)                           | 0.3 x 2 (.012 x 2)                           | 0.3 x 2 (.012 x 2)                             |
| 1.8 (.06)                                    | 1.8 (.06)                                    | 1.8 (.06)                                      |
| 2                                            |                                              |                                                |
| C                                            | C                                            | C                                              |
| 3                                            |                                              |                                                |



1 solder tags can accept quick connects .11" x .02"



2 for printed circuit boards

| 4                                              |                                                |                                                |                                                |
|------------------------------------------------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| L 70 514 175                                   | C 70 514 194                                   | E 70 514 181                                   | F 70 514 182                                   |
| Flat 54A R14.75 (.58)                          | Flat 54A R35.75 (1.41)                         | Tip-mounted in-line roller 54E R7.5 (.3)       | Tip-mounted in-line roller 54E R14.1 (.56)     |
|                                                |                                                |                                                |                                                |
| 83 132 0                                       | 83 132 0                                       | 83 132 0                                       | 83 132 0                                       |
| 83 133 0                                       | 83 133 0                                       | 83 133 0                                       | 83 133 0                                       |
| 83 134 0                                       | 83 134 0                                       | 83 134 0                                       | 83 134 0                                       |
| 9.5 <sup>+0.8</sup> (.374 <sup>+0.031</sup> )  | 10 <sup>+1.5</sup> (.413 <sup>+0.06</sup> )    | 14.2 <sup>+0.3</sup> (.56 <sup>+0.012</sup> )  | 15.5 <sup>+0.8</sup> (.61 <sup>+0.031</sup> )  |
| 9.2 <sup>+0.8</sup> (.362 <sup>+0.031</sup> )  | 9.7 <sup>+0.15</sup> (.382 <sup>+0.008</sup> ) | 13.9 <sup>+0.3</sup> (.547 <sup>+0.011</sup> ) | 15.2 <sup>+0.8</sup> (.6 <sup>+0.031</sup> )   |
| 0.18 (.6)                                      | 0.34 (1.2)                                     | 1.6 (5.6)                                      | 0.8 (2.8)                                      |
| 0.16 (.5)                                      | 0.06 (.2)                                      | 0.32 (1.1)                                     | 0.17 (.6)                                      |
| 2.15 (.085)                                    | 5.15 (.203)                                    | 1.1 (.043)                                     | 2.05 (.081)                                    |
| 1 <sup>+0.3</sup> (.04 <sup>+0.001</sup> )     | 2.1 <sup>+0.65</sup> (.083 <sup>+0.026</sup> ) | 0.5 <sup>+0.15</sup> (.02 <sup>+0.006</sup> )  | 0.95 <sup>+0.3</sup> (.037 <sup>+0.001</sup> ) |
| 2.8 (.11)                                      | 6.8 (.268)                                     | 1.45 (.057)                                    | 2.7 (.106)                                     |
| B 70 514 559                                   | A 70 514 131                                   | G 70 514 183                                   |                                                |
| Simulated Roller 54B R13.7 (.54)               | Flat 54A R7.75 (.30)                           | Tip-mounted in-line roller 54E R34.4 (1.35)    |                                                |
|                                                |                                                |                                                |                                                |
| 83 132 0                                       | 83 132 0                                       | 83 132 0                                       |                                                |
| 83 133 0                                       | 83 133 0                                       | 83 133 0                                       |                                                |
| 83 134 0                                       | 83 134 0                                       | 83 134 0                                       |                                                |
| 12.7 <sup>+0.8</sup> (.5 <sup>+0.031</sup> )   | 8.2 <sup>+0.3</sup> (.32 <sup>+0.01</sup> )    | 16.1 <sup>+1.4</sup> (.63 <sup>+0.06</sup> )   |                                                |
| 12.4 <sup>+0.8</sup> (.49 <sup>+0.031</sup> )  | 7.9 <sup>+0.3</sup> (.31 <sup>+0.01</sup> )    | 15.8 <sup>+1.4</sup> (.62 <sup>+0.05</sup> )   |                                                |
| 0.85 (.3)                                      | 1.55 (5.45)                                    | 0.34 (1.19)                                    |                                                |
| 0.18 (.6)                                      | 0.3 (1.05)                                     | 0.07 (.25)                                     |                                                |
| 2.05 (.081)                                    | 1.1 (.04)                                      | 4.9 (1.9)                                      |                                                |
| 0.95 <sup>+0.3</sup> (.037 <sup>+0.001</sup> ) | .5 <sup>+0.15</sup> (.02 <sup>+0.006</sup> )   | 2 <sup>+0.6</sup> (.08 <sup>+0.02</sup> )      |                                                |
| 2.7 (.106)                                     | 1.5 (.06)                                      | 6.6 (.26)                                      |                                                |

Ø No Actuator

Except where otherwise indicated, the actuator is mounted in the position shown in the dimensional drawings (= standard mounting).

To order please specify :

1

Switch Type  
831320  
831330  
831340

2

Contact Type  
C

3

Connection  
1  
2

Example : 831330 C 1 A L

4

Actuators  
A  
B  
C  
E

F  
G  
Ø  
L

5

Actuator Position  
L - Left (Standard)  
R - Right

Example P/N is 831330, SPDT-DB, solder terminals, A actuator mounted on the left.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


# Subminiature Switches

## Dimensions


83 132 0

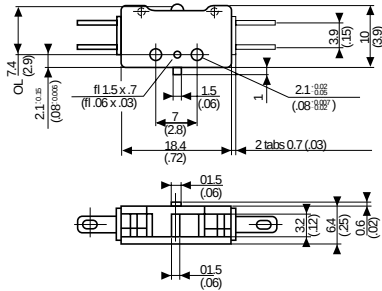

83 133 0




83 134 0

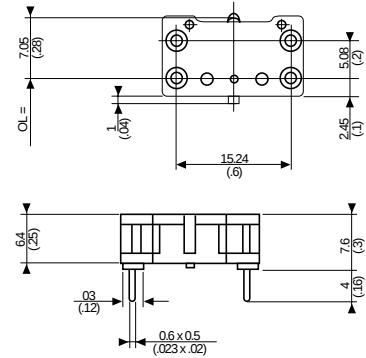


mm(in)

## Connections

1

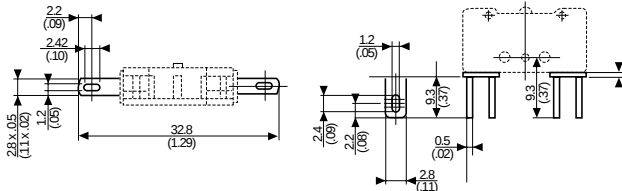

2

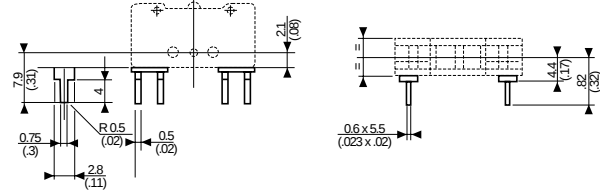

mm(in)




## Actuators

Standard mounting

A 70514131 R=7.75 (.30)  
L 70514175 R=14.75 (.58)  
C 70514194 R=35.75 (1.41)

B 70514559 R=13.7 (.54)

E 70514181 R=7.5 (.3)  
F 70514182 R=14.1 (.56)  
G 70514183 R=34.4 (1.35)

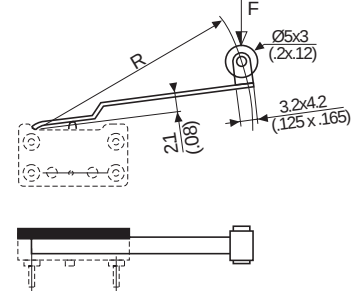


mm(in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators and mounting positions – Factory Mounted Only – for Gang Operation

Part numbers for standard actuators – Consult factory for part number


| Actuators-Length      | mm (in) | 2 pole <b>54A2</b> R30 (1.18)                                                     | 3 pole <b>54A3</b> R30 (1.18)                                                     | Side mounting plate (0.4 mm) <b>54Y</b>                                             |
|-----------------------|---------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |         |  |  |  |
|                       |         | <b>83 132 0</b>                                                                   | <b>83 132 0</b>                                                                   |                                                                                     |
|                       |         | <b>83 133 0</b>                                                                   | <b>83 133 0</b>                                                                   |                                                                                     |
|                       |         | <b>*83 134 0</b>                                                                  | <b>*83 134 0</b>                                                                  |                                                                                     |
| Tripping Point        | mm (in) | 8.8 <sup>+0.8</sup> (.346 <sup>+0.03</sup> )                                      | 8.8 <sup>+0.8</sup> (.346 <sup>+0.03</sup> )                                      |                                                                                     |
| Operating Force max   | N (oz)  | 0.8 (2.8)                                                                         | 1.2 (4.2)                                                                         |                                                                                     |
| Release Force min     | N (oz)  | 0.16 (.6)                                                                         | 0.24 (.8)                                                                         |                                                                                     |
| Pre-travel min        | mm (in) | 4.3 (.17)                                                                         | 4.3 (.17)                                                                         |                                                                                     |
| Movement differential | mm (in) | 2 <sup>+0.55</sup> (.08 <sup>+0.02</sup> )                                        | 2 <sup>+0.55</sup> (.08 <sup>+0.02</sup> )                                        |                                                                                     |
| Total travel max      | mm (in) | 5.75 (.23)                                                                        | 5.75 (.23)                                                                        |                                                                                     |

Delivered separately


\*For gang operation with 83 132 0 or 83 133 0.

## Actuators – For Gang Operation

**54A2**




**54A3**




mm(in)

## Mounting accessories

**83 132 0 - 83 133 0**



**83 134 0**



mm(in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



### Components

#### Material

- Case : polyester UL 94 VO
- Button : glass-filled polyamide
- Contacts : AgNi, gold-plated AgNi (dual-current)
- Terminals : copper-nickel


#### Actuators

- flat : stainless steel
- roller : stainless steel with polyamide roller


Approvals: NF - UL - cUL

### Operating curve


For type 83 170 0

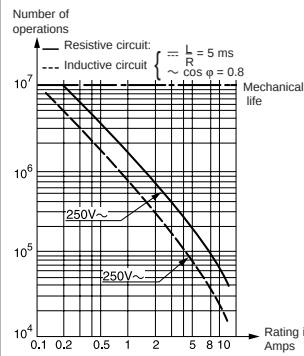

For type 83 170 4

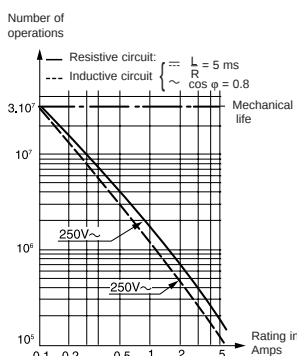

For type 83 170 9

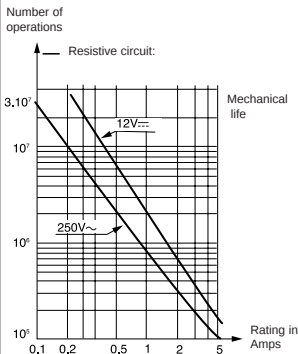

Model 83 170 9 is designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (5 A maximum) circuits. However, a given product should only be used to switch one type of circuit during its working life.

## Types

|                                                             |   |
|-------------------------------------------------------------|---|
| Part numbers for standard products (no lever) terminal type | 1 |
|                                                             | 2 |
|                                                             | 3 |

### Features

### Electrical characteristics

|                         |         |   |
|-------------------------|---------|---|
| Current rating at 250 V | Nominal | A |
|                         | Thermal | A |

### Mechanical characteristics

|                                   |            |
|-----------------------------------|------------|
| Operating force - max.            | N (oz.)    |
| Release force - min.              | N (oz.)    |
| Total travel force - max.         | N (oz.)    |
| Permitted overtravel force - max. | N (oz.)    |
| Maximum rest position             | mm (in.)   |
| Tripping point                    | mm (in.)   |
| Differential travel               | mm (in.)   |
| Overtravel - min.                 | mm (in.)   |
| Ambient operating temperature     | °C         |
| Mechanical endurance              | Operations |
| Contact gap                       | mm (in.)   |
| Weight                            | g (oz.)    |

### Contact type

- C (Form C) SPDT
- B (Form B) SPNC not available in PC terminals
- A (Form A) SPNO not available in PC terminals

### Connections

## Actuators and mounting positions

### Part numbers for standard actuators

|                    |          |
|--------------------|----------|
| Actuators – Length | mm (in.) |
|--------------------|----------|

### Mounting positions

|                |          |
|----------------|----------|
| Coefficient    |          |
| Tripping point | mm (in.) |

### Mounting positions

Except where otherwise indicated, actuators are supplied unmounted. For factory mounting, specify mounting position L or R.

- **To calculate force** : take the force quoted for the switch and divide by the coefficient given in the table.
- **To calculate travel** : take the travel quoted for the switch and multiply by the same coefficient.

### Mounting accessories for PCB mounting: 5 / 6 / 7 / 8

See page 3/9.

## Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




1

| 83170.0                                                                                                                                                                                                      | 83170.4                                                                                                                                                                                                        | 83170.9                                                                                                                                                                                                        | 83170.4 SP 4967                                                                                                                                                                                                | 83170.4                                                                                                                                                                                                        | 83170.9                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 831700C1.0                                                                                                                                                                                                   | 831704C1.0                                                                                                                                                                                                     | 831709C1.0                                                                                                                                                                                                     | 831704C2.MBSP                                                                                                                                                                                                  | 831704C1.MB                                                                                                                                                                                                    | 831709C1.MB                                                                                                                                                                                                    |
| 831700C2.0                                                                                                                                                                                                   | 831704C2.0                                                                                                                                                                                                     | 831709C2.0                                                                                                                                                                                                     | 831704C3.MBSP                                                                                                                                                                                                  | 831704C2.MB                                                                                                                                                                                                    | 831709C2.MB                                                                                                                                                                                                    |
| 831700C3.0                                                                                                                                                                                                   | 831704C3.0                                                                                                                                                                                                     | 831709C3.0                                                                                                                                                                                                     | 831704C1.MBSP                                                                                                                                                                                                  | 831704C3.MB                                                                                                                                                                                                    | 831709C3.MB                                                                                                                                                                                                    |
| High current                                                                                                                                                                                                 | Standard                                                                                                                                                                                                       | Low current                                                                                                                                                                                                    | High force                                                                                                                                                                                                     | Standard                                                                                                                                                                                                       | Low current                                                                                                                                                                                                    |
| 10<br>12.5                                                                                                                                                                                                   | 5<br>6                                                                                                                                                                                                         | 0.1                                                                                                                                                                                                            | 5<br>6                                                                                                                                                                                                         | 5<br>6                                                                                                                                                                                                         | 0.1                                                                                                                                                                                                            |
| 1.5 (5.3)<br>0.3 (1)<br>1.8 (6.3)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>3.10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>3.10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 1.5 (5.3)<br>0.3 (1)<br>1.8 (6.3)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) |

2

| C | C | C | C | C | C |
|---|---|---|---|---|---|
| B | B | B | B | B | B |
| A | A | A | A | A | A |


3



4

| A 79 253 327                                         | B 79 253 326                                        | C 79 253 328                                          | E 79 218 454                                          | F 79 253 329                                        |
|------------------------------------------------------|-----------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------|
| Flat 170A R18.3 (.72)                                | Flat 170A R24 (.94)                                 | Flat 170A R41 (1.61)                                  | Roller 170E R20 (.79)                                 | Dummy roller 170F R19.5 (.77)                       |
|                                                      |                                                     |                                                       |                                                       |                                                     |
| L 3<br>10.4 <sup>±1.2</sup> (.41 <sup>±0.05</sup> )  | L 4<br>11.1 <sup>±1.2</sup> (.44 <sup>±0.05</sup> ) | L 7<br>13.2 <sup>±2.5</sup> (.52 <sup>±1</sup> )      | L 3<br>15.4 <sup>±1.2</sup> (.61 <sup>±0.05</sup> )   | L 3<br>13 <sup>±1.2</sup> (.51 <sup>±0.05</sup> )   |
| R 1.5<br>9.2 <sup>±0.6</sup> (.36 <sup>±0.24</sup> ) | R 2<br>9.6 <sup>±0.6</sup> (.38 <sup>±0.24</sup> )  | R 3.5<br>10.7 <sup>±1.2</sup> (.42 <sup>±0.05</sup> ) | R 1.5<br>14.5 <sup>±0.6</sup> (.57 <sup>±0.24</sup> ) | R 1.5<br>12 <sup>±0.6</sup> (.47 <sup>±0.24</sup> ) |

| D 79 218 491                            | L 79 218 493                     |
|-----------------------------------------|----------------------------------|
| Screw 170D R20 (.79)                    | Transverse roller 170L R20 (.79) |
|                                         |                                  |
| Characteristics available upon request. |                                  |



Ø No Actuator

5

To order please specify :


|                                                    |                       |                                                                               |                                |                                  |
|----------------------------------------------------|-----------------------|-------------------------------------------------------------------------------|--------------------------------|----------------------------------|
| Example : 831700 C 2 . C L                         |                       |                                                                               |                                |                                  |
| <b>1</b> Switch Type                               | <b>2</b> Contact Type | <b>3</b> Connection                                                           | <b>4</b> Actuators             | <b>5</b> Actuator Position       |
| 831700<br>831704<br>831709                         | A<br>B<br>C           | 1 5<br>2 6<br>3 7<br>4 8                                                      | A<br>B<br>C<br>D<br>Ø          | L - Left (Standard)<br>R - Right |
|                                                    |                       |                                                                               | E<br>F<br>L<br>MB<br>MB SP4967 |                                  |
| To order actuators separately, use the 8 digit P/N |                       | Example P/N is 831700 SPDT solder terminals "C" actuator mounted on the left. |                                |                                  |

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

## Dimensions


### 83 170 Asymmetric

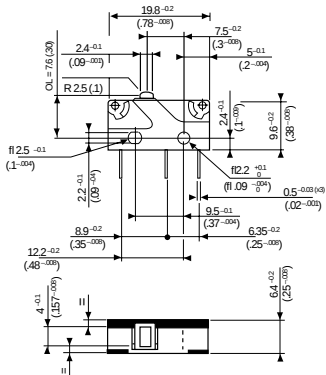

### 83 170 Symmetric



### 83 170 with MB Button




Mounting by M2 screws  
Torque : 2 cm daN


mm (in)

## Connections


### 2 Solder




### 1 .11x.02 Quick Connects




### 3-4 Straight PCB



### 5-6 Side Output PCB Rear




### 7-8 Side Output PCB Front




## Printed circuit board mounting

### Asymmetric



### Symmetric




mm (in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators

### Actuator mounting positions




A B C




TP (Tripping Point)  
Refer to pages 3/6 & 3/7.

E




F



mm (in.)

## Mounting accessories

### Mounting pins




mm (in.)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



### Components

#### Material


- Case : UL 94VO glass-filled polyester
- Button : Polyester
- Membrane : silicon
- Contacts : AgCdO  
AgNi (dual current),
- Terminals : tinned brass
- Cable : PVC (IP 67)
- Leads : PVC

#### Actuators

- flat : stainless steel
- roller : stainless steel with polyamide roller

Approvals 83 180/83 186 : NF. UL - cUL on request

### Operating curve 250 V~

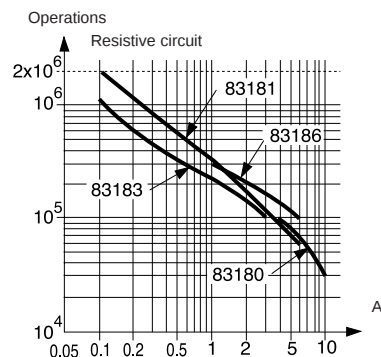

### Switch rating with DC supply

|      |                | 83 180 | 83 181 | 83 183 | 83 186 |
|------|----------------|--------|--------|--------|--------|
| 12 V | Resistive load | 10 A   | 6 A    | 3 A    | 6 A    |
|      | Inductive      | 10 A   | 6 A    | 3 A    | 6 A    |
|      | L/R 5 ms       | 10 A   | 6 A    | 3 A    | 6 A    |
| 24 V | Resistive load | 10 A   | 6 A    | 3 A    | 6 A    |
|      | Inductive      | 5 A    | 5 A    | 3 A    | 5 A    |
|      | L/R 5 ms       | 5 A    | 5 A    | 3 A    | 5 A    |

Model 83 181 is designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (6 A maximum) circuits. However, a given product should only be used to switch one type of circuit during its working life.

### Degree of protection

- Tag version : casing = IP67  
terminals = IP00
- Lead / cable version : outlet / casing = IP67

## Types

### Part numbers for standard products with connection of type

1  
2  
FD0

### Features

### Electrical characteristics

| Current rating at 250 V | Nominal<br>Hp | A<br>1/2 |
|-------------------------|---------------|----------|
|-------------------------|---------------|----------|

### Mechanical characteristics

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Operating force - max.            | N (oz.)                          |
| Release force - min.              | N (oz.)                          |
| Total travel force - max.         | N (oz.)                          |
| Permitted overtravel force - max. | N (oz.)                          |
| Rest position - max.              | mm (in.)                         |
| Tripping point                    | mm (in.)                         |
| Differential travel               | mm (in.)                         |
| Overtravel - min.                 | mm (in.)                         |
| Ambient operating temperature     | for tag version °C (°F)          |
|                                   | for lead / cable version °C (°F) |
| Mechanical durability             | Operations                       |
| Contact gap                       | mm (in.)                         |
| Weight (tag version)              | g (oz.)                          |


### Contact Type

C (Form C) SPDT

B (Form B) SPNC not available in PC terminals

A (Form A) SPNO not available in PC terminals

### Connections



### Actuators and mounting positions

#### Part numbers for standard actuators

Actuators - Length mm (in.)

#### Mounting position

|                |          |
|----------------|----------|
| Coefficient    |          |
| Tripping point | mm (in.) |
| 83 180         |          |
| 83 181/183/186 |          |

#### Part numbers for standard actuators

Actuators - Length mm (in.)

#### Mounting positions

|                |  |
|----------------|--|
| Coefficient    |  |
| Tripping point |  |

Except where otherwise indicated, actuators are supplied unmounted.

For factory mounting, specify fixing position L or R.

- To calculate force : take the force quoted for the switch and divide by the coefficient given in the table.

- To calculate travel : take the travel quoted for the switch and multiply by the same coefficient.

### Mounting accessories for PCB mounting : 5 / 6 / 7 / 8

See page 3/9.

## Other information

For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order



| 83180        | 83181        | 83183        | 83186        |
|--------------|--------------|--------------|--------------|
| 831800C1.0   | 831810C1.0   | 831830C1.0   | 831860C1.0   |
| 831800C2.0   | 831810C2.0   | 831830C2.0   | 831860C2.0   |
| 831800CFD0.0 | 831810CFD0.0 | 831830CFD0.0 | 831860CFD0.0 |



| High current | Dual current | Medium current | Standard |
|--------------|--------------|----------------|----------|
| 10           | 6            | 3              | 6        |
| 12.5         | 7.5          | 4              | 7.5      |

|                       |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|
| 3.4 (12)              | 2.5 (8.8)             | 2.5 (8.8)             | 2.5 (8.8)             |
| 1 (3.5)               | 0.8 (2.8)             | 0.8 (2.8)             | 0.8 (2.8)             |
| 5 (17.6)              | 4.2 (14.1)            | 4.2 (14.1)            | 4.2 (14.1)            |
| 10 (35.3)             | 10 (35.3)             | 10 (35.3)             | 10 (35.3)             |
| 9.3 (.37)             | 9.3 (.37)             | 9.3 (.37)             | 9.3 (.37)             |
| 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) |
| 0.10 (.004)           | 0.10 (.004)           | 0.10 (.004)           | 0.10 (.004)           |
| 0.6 (.024)            | 0.6 (.024)            | 0.6 (.024)            | 0.6 (.024)            |
| -40 +125 (-40 +257)   | -40 +125 (-40 +257)   | -40 +125 (-40 +257)   | -40 +125 (-40 +257)   |
| -40 +105 (-40 +221)   | -40 +105 (-40 +221)   | -40 +105 (-40 +221)   | -40 +105 (-40 +221)   |
| 10 <sup>6</sup>       | 2 x 10 <sup>6</sup>   | 2 x 10 <sup>6</sup>   | 2 x 10 <sup>6</sup>   |
| 0.4 (.016)            | 0.4 (.016)            | 0.4 (.016)            | 0.4 (.016)            |
| 2 (.07)               | 2 (.07)               | 2 (.07)               | 2 (.07)               |

| C | C | C | C |
|---|---|---|---|
| B | B | B | B |
| A | A | A | A |

|   |   |   |   |     |     |     |       |       |       |
|---|---|---|---|-----|-----|-----|-------|-------|-------|
| 5 | 6 | 7 | 8 | FD0 | FB0 | FG0 | CD0** | CB0** | CG0** |
|---|---|---|---|-----|-----|-----|-------|-------|-------|

| A 79 253 327                                                                        | B 79 253 326                                                                        | C 79 253 328                                                                        | E 79 218 454                                                                          |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Flat 170A R18.3 (.72)                                                               | Flat 170A R24 (.94)                                                                 | Flat 170A R41 (1.61)                                                                | Roller 170E R20 (.79)                                                                 |
|  |  |  |  |
| L 3<br>10.4 ±1.2 (.41 ±.05)                                                         | L 4<br>11.1 ±1.2 (.44 ±.05)                                                         | L 7<br>13.2 ±2.5 (.52 ±.1)                                                          | L 3<br>15.4 ±1.2 (.61 ±.05)                                                           |
| R 1.5<br>9.2 ±0.6 (.36 ±.24)                                                        | R 2<br>9.6 ±0.6 (.38 ±.024)                                                         | R 3.5<br>10.7 ±1.2 (.42 ±.05)                                                       | R 1.5<br>14.5 ±0.6 (.57 ±.24)                                                         |

| F 79 253 329                                                                        | D *                                                                                 | L *                                                                                  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Dummy roller 170F R19.5 (.77)                                                       | Screw 170D                                                                          | Transverse roller 170EL *                                                            |
|  |  |  |
| L 3<br>13 ±1.2 (.51 ±.05)                                                           |                                                                                     |                                                                                      |
| R 1.5<br>12 ±0.6 (.47 ±.24)                                                         |                                                                                     |                                                                                      |

Ø No  
Actuator

\* Special order, contact us for part number  
\*\* Cable version for types 83 181, 83 183 and 83 186

To order please specify :

|                                                       |                               |                                                                        |                                           |                                                         |
|-------------------------------------------------------|-------------------------------|------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------|
| 1 Switch Type<br>831810<br>831830<br>831860<br>831800 | 2 Contact Type<br>A<br>B<br>C | 3 Connection<br>1 6<br>2 7<br>3 8<br>4 FDØ CDØ<br>5 FGØ CBØ<br>FBØ CGØ | 4 Actuators<br>Ø<br>A<br>B<br>C<br>D<br>E | 5 Actuator Position<br>L - Left (Standard)<br>R - Right |
|-------------------------------------------------------|-------------------------------|------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------|

To order actuators separately, use the 8 digit P/N

Example P/N is 831810 SPDT solder terminals with no actuator.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


# Sealed Subminiature Switches DIN 41635 B

## Dimensions

### Symmetric

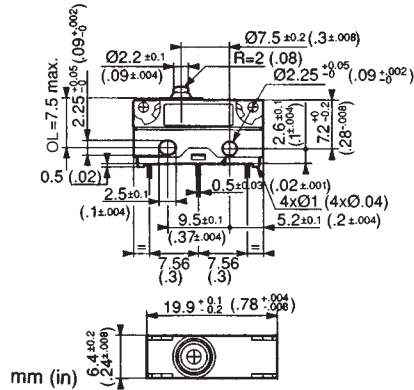

### Asymmetric



Fixed by 2 x M2 screws

Torque for


screw alone: 0.2 Nm (1.75 in. lbs.)

screw + washer: 0.3 Nm (2.65 in. lbs.)


## Connections

### Terminals


2 Solder




1 Faston 2.8 x 0.5 .110" Quick Connects

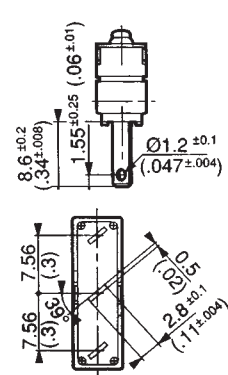


3 - 4 Straight PCB output



5 - 6 Side output, PCB rear



7 - 8 Side output, PCB front



### Printed circuit board mounting



Asymmetric  
3, 5, 7

Symmetric  
4, 6, 8



### Mounting on a printed circuit board with mounting pins

Asymmetric


Symmetric

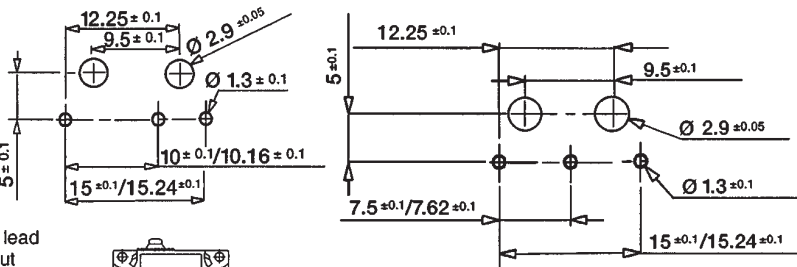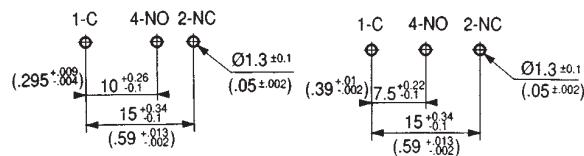

### Lead output

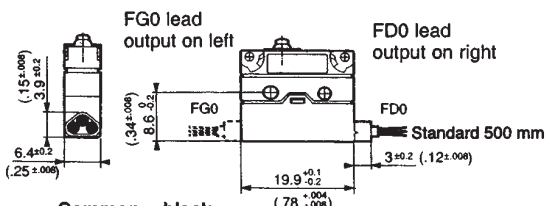

### Mounting pins




Common = black  
NC = brown  
NO = blue  
mm (in)

Conductor cross-section :  
83181 / 83183 / 83186 = 3 x 0.5 mm<sup>2</sup> (.12 x .02 in<sup>2</sup>)  
83180 = 3 x 0.75 mm<sup>2</sup> (.12 x .03 in<sup>2</sup>)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


## Cable output

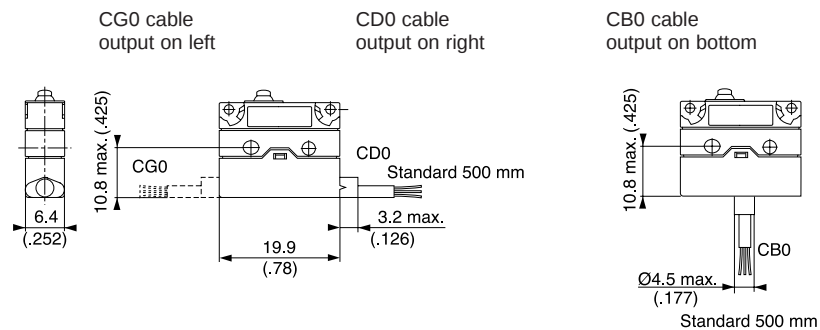

mm (in.)

## Actuators




### Mounting positions



A, B, C  
Flat

E  
Roller

F  
Dummy roller



mm (in.)

### Recommendations for operation from the side




Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



### Components

#### Material

- Case : glass-filled polyamide (self-extinguishing version to UL 94 VO and IEC 695-2-1 850° C - available on request)
- Button : polyamide
- Contacts : nickel silver or gold alloy (dual-current)


#### Actuators

- flat : stainless steel
- roller : stainless steel, glass-filled polyamide roller
- other types of polyamide


Approvals: NF - UL/cUL

### Operating curve


For type 83 161 1 3




For type 83 161 5 - 5 SP 4136



For type 83 161 8



For type 83 161 9 SP 4136



For types 83 161 8 - 9 SP 4136 dual-current

Models 83 161 8 and 83 161 9 SP 4136 are designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (5 A maximum) circuits.

However, a given product should only be used to switch one type of circuit during its working life.

## Types

Part numbers for standard products with connections of type

2  
3  
6

### Features

#### Electrical characteristics

|                             |            |    |
|-----------------------------|------------|----|
| Current rating at 125/250 V | Current    | A  |
|                             | Horsepower | HP |

#### Mechanical characteristics

|                                    |            |
|------------------------------------|------------|
| Operating force - max.             | N (oz.)    |
| Release force - min.               | N (oz.)    |
| Total travel force - max.          | N (oz.)    |
| Permitted overtravel force - max.  | N (oz.)    |
| Rest position - max.               | mm (in.)   |
| Tripping point                     | mm (in.)   |
| Differential travel                | mm (in.)   |
| Overtravel - min. (OT)             | mm (in.)   |
| Ambient operating temperature      | °C (°F)    |
| Mechanical durability (for 2/3 OT) | Operations |
| Contact gap                        | mm (in.)   |
| Weight                             | g (oz.)    |

#### Contact type

C (Form C) SPDT

B (Form B) SPNC

A (Form A) SPNO

#### Connections



2 solder



3 for 1/4" Quick Connects

### Actuators and mounting positions

Part numbers for standard actuators A 79 215 740

Actuators-Length mm (in.) Flat 161A R14.2 (.56)



|                                  |                                |                                   |
|----------------------------------|--------------------------------|-----------------------------------|
| Mounting positions               | A                              | B                                 |
| Coefficient                      | 2                              | 1                                 |
| Tripping point (except 83 161 6) | 15.2 $\pm 1$ (.6 $\pm 0.04$ )  | 15.2 $\pm 0.45$ (.6 $\pm 0.018$ ) |
| Tripping point 83 161 6          | 14.8 $\pm 1$ (.59 $\pm 0.04$ ) | 15 $\pm 0.45$ (.59 $\pm 0.018$ )  |

Part numbers for standard actuators H 79 218 651

Actuators-Length mm (in.) Dummy roller 161G R21.8 (.86)



|                                  |                                |                                  |
|----------------------------------|--------------------------------|----------------------------------|
| Mounting positions               | A                              | B                                |
| Coefficient                      | 3                              | 1.8                              |
| Tripping point (except 83 161 6) | 21.7 $\pm 2$ (.85 $\pm 0.08$ ) | 21.7 $\pm 0.7$ (.85 $\pm 0.03$ ) |
| Tripping point 83 161 6          | 21.5 $\pm 2$ (.85 $\pm 0.08$ ) | 21.5 $\pm 0.7$ (.85 $\pm 0.03$ ) |

## Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items


Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com



| 1                                            |                                              |                                              |                                              |                                              |                                              |                                              |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| 83161.1(10.1A)                               | 83161.2(15.1A)                               | 83161.3(10.1A)                               | 83161.5(4A)<br>83161.9(0.1A)                 | 83161.5SP4136<br>83161.9SP4136               | 83161.6                                      | 83161.8(0.1A)                                |
| 831611C2.0                                   | 831612C2.0                                   | 831613C2.0                                   | 831615C2.0                                   | •                                            | 831616C2.0                                   | 831618C2.0                                   |
| 831611C3.0                                   | 831612C3.0                                   | 831613C3.0                                   | 831615C3.0                                   | •                                            | 831616C3.0                                   | 831618C3.0                                   |
| 831611C6.0                                   | 831612C6.0                                   | 831613C6.0                                   | 831615C6.0                                   | •                                            | 831616C6.0                                   | 831618C6.0                                   |
| High Force                                   | High Current                                 | Standard                                     | Low Force                                    | Ultra Light Force                            | Wide Gap                                     | Dual Current                                 |
| 10.1                                         | 15.1                                         | 10.1                                         | 4                                            | 4                                            | 6.1                                          | 0.1                                          |
| 1/2                                          | 1/2                                          | 1/2                                          | 1/10                                         | 1/10                                         | 1/3                                          | N/A                                          |
| 3 (10.5)                                     | 0.8 (2.8)                                    | 0.8 (2.8)                                    | 0.25 (0.9)                                   | 0.15 (0.54)                                  | 5 (18)                                       | 0.8 (2.8)                                    |
| 1 (3.5)                                      | 0.2 (0.7)                                    | 0.2 (0.7)                                    | 0.05 (0.18)                                  | 0.04 (0.14)                                  | 0.5 (1.8)                                    | 0.2 (0.7)                                    |
| 4.5 (15.8)                                   | 2 (7.0)                                      | 2 (7.0)                                      | 0.35 (1.2)                                   | 0.2 (0.72)                                   | 6 (21.6)                                     | 0.2 (.07)                                    |
| 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    |
| 16.1 (0.63)                                  | 16.2 (0.64)                                  | 16.2 (0.64)                                  | 16.3 (0.64)                                  | 16.3 (0.64)                                  | 16.1 (0.63)                                  | 16.2 (0.64)                                  |
| 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.5 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) |
| 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.8 (0.03)                                   | 0.35 (0.014)                                 |
| 1.1 (0.05)                                   | 1.2 (0.05)                                   | 1.2 (0.05)                                   | 1.1 (0.05)                                   | 1.2 (0.05)                                   | 0.9 (0.035)                                  | 1.2 (0.05)                                   |
| -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           |
| 10 <sup>7</sup>                              | 2 x 10 <sup>7</sup>                          | 2 x 10 <sup>7</sup>                          | 5 x 10 <sup>7</sup>                          | 5 x 10 <sup>7</sup>                          | 5 x 10 <sup>4</sup>                          | 2 x 10 <sup>7</sup>                          |
| 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 3.2 (0.126)                                  | 0.4 (0.016)                                  |
| 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     |
| 2                                            |                                              |                                              |                                              |                                              |                                              |                                              |
| C                                            | C                                            | C                                            | C                                            | C                                            | C                                            | C                                            |
| B                                            | B                                            | B                                            | B                                            | B                                            | B                                            | B                                            |
| A                                            | A                                            | A                                            | A                                            | A                                            | A                                            | A                                            |
| 3                                            |                                              |                                              |                                              |                                              |                                              |                                              |



5 screw



6 for 3/16 Quick Connects



7 for .11 Quick Connects

| 4                                              |                                           |                                              |                                              |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |
|------------------------------------------------|-------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|--|--------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------------------------|----------------------------------------------|-----------------------------------------------|
| B 70 507 524                                   |                                           |                                              | E 79 215 742                                 |                                              |  | G 70 507 529                                                 |                                              |                                              | F 70 507 528                                                   |                                              |                                               |
| Flat 161A R25.4 (1)                            |                                           |                                              | Roller 161E R13.6 (.54)                      |                                              |  | Roller 161E R24.1 (.95)                                      |                                              |                                              | Dummy 161F roller R22.2 (.84)                                  |                                              |                                               |
|                                                |                                           |                                              |                                              |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |
| A                                              | B                                         | C                                            | A                                            | B                                            |  | A                                                            | B                                            | C                                            | A                                                              | B                                            | C                                             |
| 4                                              | 2                                         | 1.5                                          | 2                                            | 1                                            |  | 4                                                            | 2                                            | 1.5                                          | 3                                                              | 1.8                                          | 1.5                                           |
| 15.2 <sup>+2.5</sup> (.6 <sup>+1</sup> )       | 15.2 <sup>+1</sup> (.6 <sup>+0.4</sup> )  | 15.2 <sup>+0.8</sup> (.6 <sup>+0.03</sup> )  | 20.5 <sup>+1.5</sup> (.81 <sup>+0.06</sup> ) | 20.5 <sup>+0.8</sup> (.81 <sup>+0.03</sup> ) |  | 20.5 <sup>+2.0</sup> (.81 <sup>+0.11</sup> )                 | 20.5 <sup>+1.5</sup> (.81 <sup>+0.06</sup> ) | 20.5 <sup>+1.2</sup> (.81 <sup>+0.05</sup> ) | 20.4 <sup>+2</sup> (.8 <sup>+0.08</sup> )                      | 20.5 <sup>+0.7</sup> (.81 <sup>+0.03</sup> ) | 20.5 <sup>+0.9</sup> (.81 <sup>+0.035</sup> ) |
| 14.4 <sup>+2.5</sup> (.56 <sup>+1</sup> )      | 14.8 <sup>+1</sup> (.58 <sup>+0.4</sup> ) | 14.9 <sup>+0.8</sup> (.59 <sup>+0.03</sup> ) | 20.1 <sup>+1.5</sup> (.79 <sup>+0.06</sup> ) | 20.3 <sup>+0.8</sup> (.80 <sup>+0.03</sup> ) |  | 19.7 <sup>+2.0</sup> (.76 <sup>+0.11</sup> )                 | 20.1 <sup>+1.5</sup> (.79 <sup>+0.06</sup> ) | 20.2 <sup>+1.2</sup> (.79 <sup>+0.05</sup> ) | 20.2 <sup>+2</sup> (.79 <sup>+0.08</sup> )                     | 20.2 <sup>+1</sup> (.79 <sup>+0.03</sup> )   |                                               |
| 4                                              |                                           |                                              |                                              |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |
| L                                              |                                           |                                              | V 161V                                       |                                              |  | C 70 507 526                                                 |                                              |                                              | D 79 215 835                                                   |                                              |                                               |
| ** Telescopic plunger<br>Manual action<br>161L |                                           |                                              |                                              |                                              |  | Flat 161A R50 (1.9)                                          |                                              |                                              | Flat 161A R60 (2.39)                                           |                                              |                                               |
|                                                |                                           |                                              |                                              |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |
| D Factory Mount only                           |                                           |                                              | D Factory Mount only                         |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |
| 1                                              |                                           |                                              | 1                                            |                                              |  | A B C                                                        |                                              |                                              | A B C                                                          |                                              |                                               |
| 21.5 <sup>+1</sup> (.85 <sup>+0.4</sup> )      |                                           |                                              | 18.35 <sup>+0.45</sup>                       |                                              |  | 15.2 <sup>+0.3</sup> 15.2 <sup>+2</sup> 15.2 <sup>+1.5</sup> |                                              |                                              | 15.2 <sup>+0.9</sup> 15.2 <sup>+2.5</sup> 15.2 <sup>+2.3</sup> |                                              |                                               |
| 21.5 <sup>+1</sup> (.85 <sup>+0.4</sup> )      |                                           |                                              |                                              |                                              |  |                                                              |                                              |                                              |                                                                |                                              |                                               |

For factory mounting, specify fixing position A, B or C


\*\* For 83 161 1, 83 161 3, 83 161 6, 83 161 8, mounted in factory (supplied without nut)

To order, please specify :

| 1 Switch Type                                                                                                                                                | 2 Contact Type | 3 Connection          | Example : 831612 C 3 • C A | 4 Actuators                | 5 Actuator Position   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------|----------------------------|----------------------------|-----------------------|
| 831612 831619<br>831613 831616<br>831615 831611<br>831618                                                                                                    | A<br>B<br>C    | 2<br>3<br>5<br>6<br>7 |                            | Ø<br>A<br>B<br>C<br>D<br>E | F<br>G<br>H<br>L<br>V |
|                                                                                                                                                              |                |                       |                            |                            |                       |
| <p>To order actuators separately, use the 8 digit P/N Example switch is 831612, SPDT, 1/4" Q.C., C actuator mounted in A position</p> <p>Ø = No actuator</p> |                |                       |                            |                            |                       |

## Dimensions


### 83 161

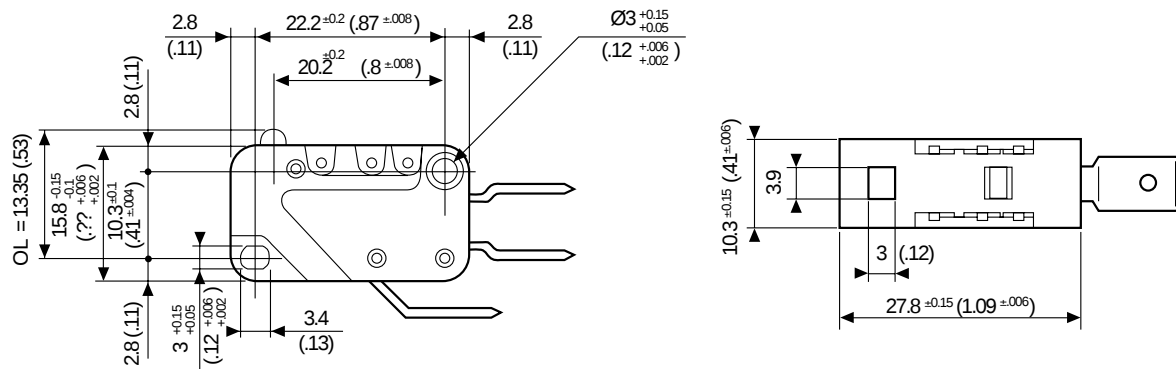


mm (in)

## Connections


### 2 Solder

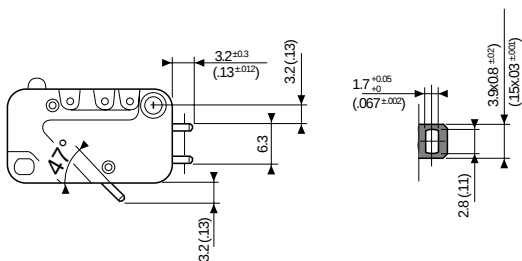


### 3 (6.3x0.8 (1/4x.03)) Quick Connects

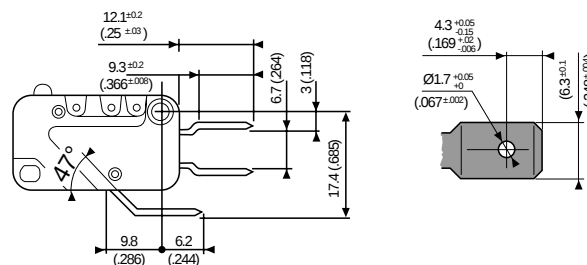


### 5 Screw

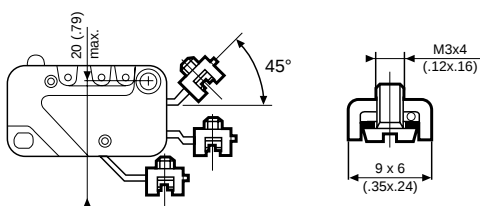

### 6 (4.8x0.5 (.3/16x.02)) Quick Connects

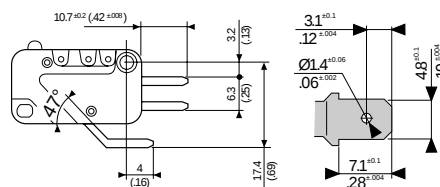


### 7 (2.5x0.5 (.11x.02)) Quick Connects



## Actuators

mm (in)

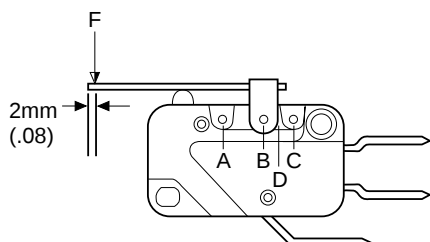

**Force calculation** : divide the switch forces by the coefficient in the table.

**Travel calculation** : multiply the switch travel by the same coefficient.

### Example :

83 161 3 with B Flat 161A actuator R 25.4 (1) position A (coef. 4)


Operating force :  $0.8 \div 4 = 0.2$  N

Pre-travel:  $1.4 \times 4 = 5.6$  mm (.055 x 4 = .22 in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuator Mounting Positions

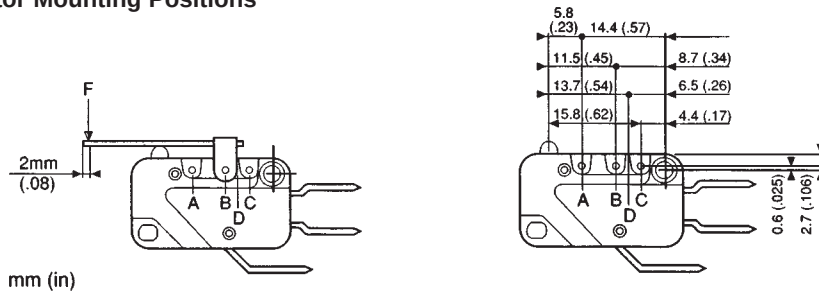


## Actuators


### E - G

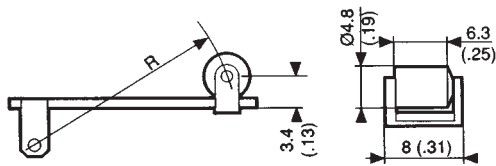


### A - B - C - D

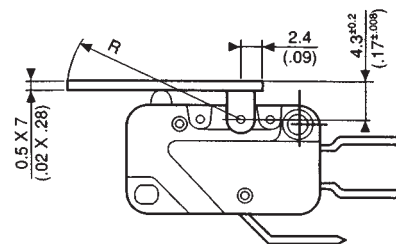


### L

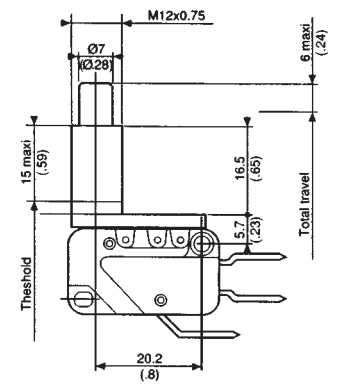


### V



### F

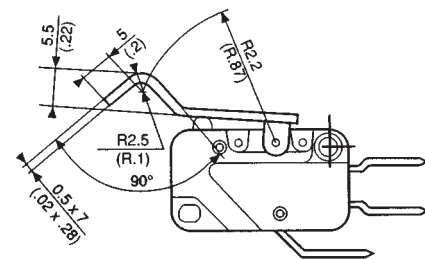

### H

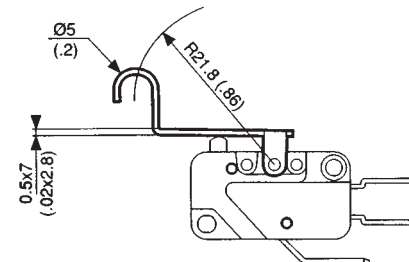


mm (in)

| Nut depth   | Torque max.        |
|-------------|--------------------|
| 1.5mm (.06) | 5Cm N (7 in oz.)   |
| 2mm (.08)   | 7Cm N (10 in. oz)  |
| 2.5mm (.1)  | 10Cm N (14 in. oz) |

## Accessories


Nuts 70 602 118 for L type actuator



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Miniature Positive Break Switches Series 83 160 DIN 41635 A




## General specifications

### Layout

The contact conforms to NFC 63 143 and IEC 947.5.1

\*The SPDT version conforms to standard IEC 947.5.1 if only the normally closed contact is used.

The switch operating principle forces the contacts open even in the event of welding (positive break operation).



### Components

#### Material

- Case : glass-filled polyamide
  - Cover : transparent polycarbonate
  - Contacts : nickel silver
  - Positive rocker : high temperature thermoplastic
- Actuators** : stainless steel  
- polyamide roller

### Electrical characteristics

#### Short-circuit test

- (from IEC 947-5-1 § 8.34)
- Current peak 1000 A at 250 V ~ 0.5 < cos φ < 0.7
- Short-circuit protection (SCPD) : fuse 10 A gG
- (IEC 60) (1.2/50 μs) : 2500 V

#### Electrical life


- Max. operations : 20 cycles/min
- Resistive load at 250 V ~ 16 A : 10<sup>5</sup> cycles
- Inductive load (IEC 947.5.1) : AC 15 : 250 V ~ 6A : 0.3 x 10<sup>5</sup> operations
- DC 13 : 24 V ~ 20 W L/R = 40 ms : 3 x 10<sup>5</sup> operations
- 120 V ~ 20 W L/R = 40 ms : 5 x 10<sup>5</sup> operations

### Definitions

**P.O.F.** Minimum Positive Opening Force.  
The operating force that has to be applied to the operating device to produce the positive opening action.

**P.O.P.** Maximum Positive Opening Position.  
The position of the operating device at the moment when positive opening of the contacts occurs.

For other definitions, see "Basic concepts".

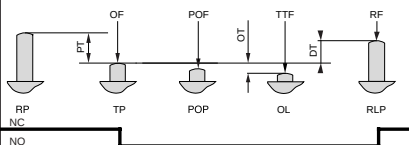

## Types

### 83 160 7

| Features                          |               | With positive break operation                 |                                               |
|-----------------------------------|---------------|-----------------------------------------------|-----------------------------------------------|
| Electrical characteristics        |               | NC                                            | SPDT*                                         |
| Assigned working voltage (Ue)     | V             | 250                                           | 250                                           |
| Assigned working current (Ie)     | A             | 6                                             | 6                                             |
| Thermal current rating (Ith)      | A             | 10                                            | 10                                            |
| Assigned circuit voltage (Ui)     | V             | 250                                           | 250                                           |
| Mechanical characteristics        |               |                                               |                                               |
| Operating force - max.            | N (oz.)       | 4 (14.1)                                      | 4 (14.1)                                      |
| Release force - min.              | N (oz.)       | 1.5 (3.5)                                     | 1.5 (3.5)                                     |
| Min. positive opening force       | N(oz.)        | 18 (63.5)                                     | 18 (63.5)                                     |
| Permitted overtravel force - max. | N (oz.)       | 200 (70.5)                                    | 200 (70.5)                                    |
| Maximum rest position             | mm (in.)      | 15.7 (.62)                                    | 15.7 (.62)                                    |
| Tripping point                    | mm (in.)      | 14.8 <sup>+0.3</sup> (.58 <sup>+0.012</sup> ) | 14.8 <sup>+0.3</sup> (.58 <sup>+0.012</sup> ) |
| Maximum positive opening position | mm (in.)      | 13.5 (.53)                                    | 13.5 (.53)                                    |
| Overtravel - min.                 | mm (in.)      | 1.3 (0.047)                                   | 1.3 (0.047)                                   |
| Operating speed max.              | m/s (ft/sec)  | 0.5 (1.64)                                    | 0.5 (1.64)                                    |
| Operating rate max.               | (operation/s) | 5                                             | 5                                             |
| Operating temperature             | °C (°F)       | -40+85 (-40+185)                              | -40+85(-40+185)                               |
| Mechanical durability             | Operations    | 10 <sup>7</sup>                               | 10 <sup>7</sup>                               |
| Contact gap                       | mm (in.)      | 1.2 (0.05)                                    | 1.2 (0.05)                                    |
| Weight                            | g (oz.)       | 7 (0.25)                                      | 7 (0.25)                                      |

### Contact Type

B (NC)

B

C (SPDT)\*

C

### Connections



2 solder



3 for 1/4" Quick Connects




6 for 3/16" Quick Connects



X1 for printed circuit board

### Actuators and mounting positions


#### Dimensions

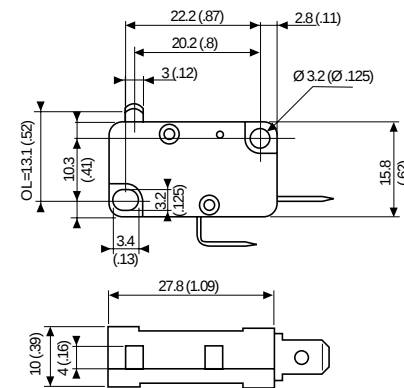

mm (in)

#### Actuators\*\*

Ø=no Actuator

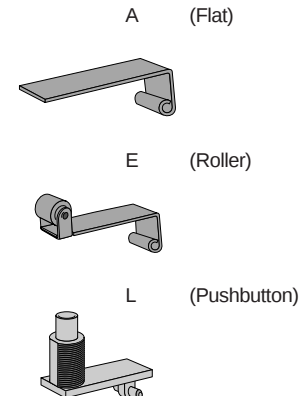

### Other information

For other accessories, connections : please consult us

\*NO – contact is not positive break

\*\* Consult us for actuator length, forces and positions

### To order, specify :

Example : 831607 B 3 • Ø

1 Switch Type

831607

2 Contact Type

B  
C

3 Connection

2  
3  
6 X1

4 Actuator Type

A L  
E  
Ø = No Actuator

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com




# Miniature Side Rotary (High Sensitivity) Switches Series 83 137



## General specifications

### Layout



### Components

#### Material


- Case : glass filled polyamide

- Contacts : silver


#### Actuators

- Stainless steel wire

### Operating curve



### Actuator setting in $\alpha$

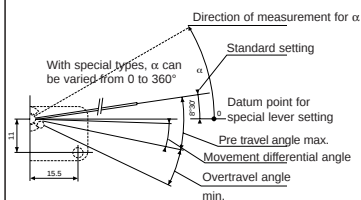

**Approvals** CSA (LR-20418), ASE, Semko, UTE & VDE.

For other connections, actuators, approvals accessories... Please consult factory

## Types

**83 137 0**

### Features

Standard

### Electrical characteristics

Current rating at 125-250 V

Nominal  
Thermal

A  
A

5  
14

### Mechanical characteristics

Maximum operating force

N cm (in. oz)

0.12 (.17)

Minimum release torque

N cm (in. oz)

0.03 (.042)

Overtravel torque

N cm (in. oz)

0.5 (.71)

Movement differential

°

10<sup>+0.4</sup>

Overtravel - min.

°

12

Operating temperature

°C (F°)

-20 to 125 (-4 to 257)

Mechanical life

Operations

10<sup>7</sup>

Contact gap

mm (in)

0.8 (.031)

Weight

g (oz)

7.2 (.25)

### Contact Type

C (Form C) SPDT

C

B (Form B) SPNC

B

A (Form A) SPNO

A

### Connections




2 solder




3 for 1/4" Quick Connects

## Dimensions

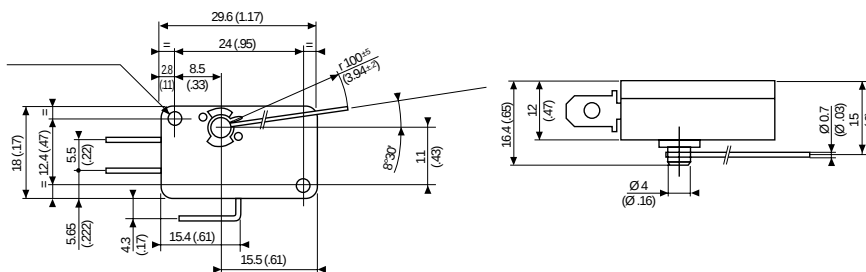

mm (in)

### Dimensions connections

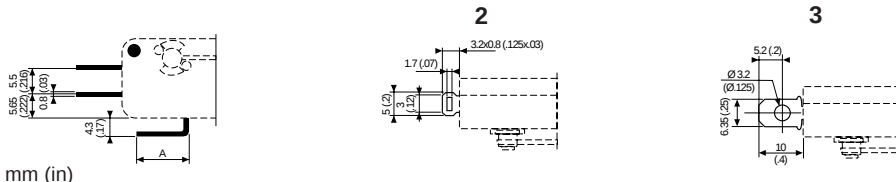

mm (in)

To order, please specify :

Example : 831370 C 3 • W

**1** Switch Type

831370

**2** Contact Type

A  
B  
C


**3** Connection

2  
3

Example switch is: 831370, SPDT, 1/4" Q.C.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## General specifications

### Layout



- The NO and NC circuits must both be of the same polarity.

### Components

#### Material


- Case : polyamide (83 106 to 83 112)
- Case : Diallyl-Phthalate (83 154)
- Contacts : nickel silver

#### Actuators

- passivated mild steel
  - roller : nylon
  - adjustable screws : self-retaining
  - plates : passivated mild steel (zinc)
- Note : Fixing holes for these switches have metal ferrules.

Approvals: UL - cUL

## Operating curve



83 154

## Types

83 106 0

### Features

Standard

### Electrical characteristics

|                         |             |   |      |
|-------------------------|-------------|---|------|
| Current rating at 250 V | Nominal --- | A | —    |
|                         | Nominal ~   |   | 10   |
|                         | Thermal     | A | 17.5 |

### Mechanical characteristics

|                                   |            |                                                            |
|-----------------------------------|------------|------------------------------------------------------------|
| Operating force - max.            | N (oz.)    | 4 (14.1)                                                   |
| Release force - min.              | N (oz.)    | 1 (3.5)                                                    |
| Permitted overtravel force - max. | N (oz.)    | 20 (70.5)                                                  |
| Maximum rest position             | mm (in.)   | 12.75 (.5)                                                 |
| Tripping point                    | mm (in.)   | 11.45 <sup>+0.2 -0.25</sup> (11.45 <sup>+0.2 -0.25</sup> ) |
| Differential travel               | mm (in.)   | 0.5 <sup>±0.2</sup> (0.02 <sup>±0.008</sup> )              |
| Overtravel - min.                 | mm (in.)   | 0.7 (.28)                                                  |
| Ambient operating temperature     | °C (°C)    | -20 +85 (-4 +185)                                          |
| Mechanical durability             | Operations | 10 <sup>7</sup>                                            |
| Contact gap                       | mm (in.)   | 0.4 x 2                                                    |
| Weight                            | g (oz.)    | 8                                                          |

### Contact type

C (Form C) SPDT

C

B (Form B) SPNC

A (Form A) SPNO

### Connections

## Actuators and mounting positions

### Part numbers for standard actuators

A 70 500 888

Actuators-Length

mm (in.)

Flat R49 (1.92)



|                        |          |                                               |
|------------------------|----------|-----------------------------------------------|
| Operating force - max. | N (oz.)  | 1.2 (4.2)                                     |
| Release force - min.   | N (oz.)  | 0.25 (.9)                                     |
| Pre-travel - max.      | mm (in.) | 6.2 (.24)                                     |
| Differential travel    | mm (in.) | 2.1 <sup>±0.9</sup> (.083 <sup>±0.035</sup> ) |
| Total travel max.      | mm (in.) | 7.5 (.3)                                      |

Except where otherwise indicated, the flat and roller actuators are mounted as shown in the dimensional drawings (mounted on the left).

### Assemblies

## Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

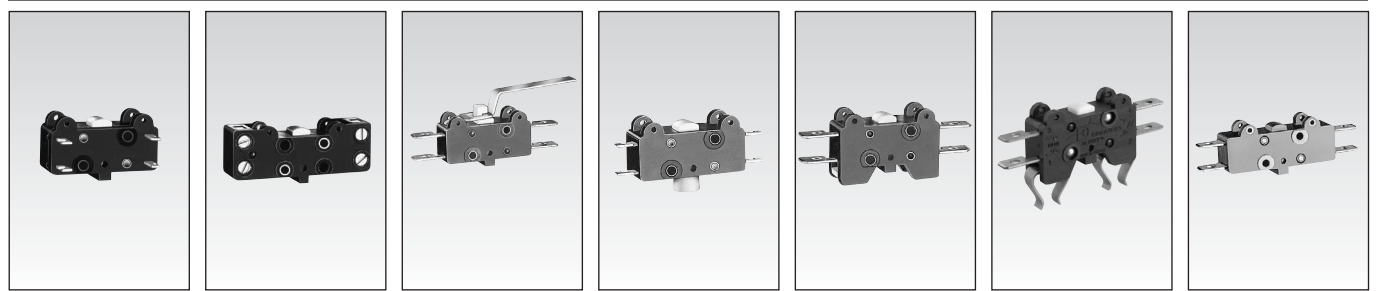

1

83 109 0

83 112 0

83 106 4

83 106 7

83 111 0

83 111 5

83 154 0

| Face terminals | Enclosed screws | Bistable, 2 actuator positions | Bistable, 2 push button positions | Base mounting by screws | Base mounting by clips | Magnetic blow-out switch |
|----------------|-----------------|--------------------------------|-----------------------------------|-------------------------|------------------------|--------------------------|
|----------------|-----------------|--------------------------------|-----------------------------------|-------------------------|------------------------|--------------------------|

|                                                     |                                                     |                      |                      |                                                     |                                                     |                                                     |
|-----------------------------------------------------|-----------------------------------------------------|----------------------|----------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| 10                                                  | 10                                                  | 10                   | 10                   | 10                                                  | 10                                                  | 5                                                   |
| 17.5                                                | 17.5                                                | 17.5                 | 17.5                 | 17.5                                                | 17.5                                                | 17.5                                                |
| 4 (14.1)                                            | 4 (14.1)                                            | 0.45 (1.62)          | 2 (7.19)             | 4 (14.1)                                            | 4 (14.1)                                            | 4 (14.1)                                            |
| 1 (3.5)                                             | 1 (3.5)                                             |                      |                      | 1 (3.5)                                             | 1 (3.5)                                             | 1 (3.5)                                             |
| 20 (70.5)                                           | 20 (70.5)                                           |                      |                      | 20 (70.5)                                           | 20 (70.5)                                           | 20 (70.5)                                           |
| 12.75 (.5)                                          | 12.75 (.5)                                          |                      |                      |                                                     |                                                     |                                                     |
| 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) |                      |                      | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) |
| 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         |                      |                      | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.65 <sup>±0.25</sup> (.02 <sup>±.008</sup> )       |
| 0.7 (.29)                                           | 0.7 (.29)                                           |                      |                      | 0.7 (.29)                                           | 0.7 (.29)                                           | 0.7 (.29)                                           |
| -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)    | -20 +85 (-4 +185)    | -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)                                   | -40 +125 (-4 +257)                                  |
| 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     | 10 <sup>6</sup>      | 10 <sup>6</sup>      | 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     |
| 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08) | 0.4 x 2 (.016 x .08) | 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08)                                | 0.5 x 2 (.016 x .08)                                |
| 8 (.3)                                              | 14.5 (.3)                                           | 9 (.32)              | 8 (.3)               | 8 (.3)                                              | 8 (.3)                                              | 11 (.3)                                             |

Contact type

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| C | C | C | C | C | C | C |
|   |   | B | B | B | B | B |
|   |   | A | A | A | A | A |

2

3



2 solder



3 for 1/4" Quick Connects



1 screw

4

|                                              |                                              |                                              |                                             |                                             |                      |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|---------------------------------------------|---------------------------------------------|----------------------|
| <b>B 70 500 828</b>                          | <b>E 70 500 813</b>                          | <b>Q 70 500 840</b>                          | <b>T 70 500 870</b>                         | <b>B9</b>                                   | <b>21 416 364</b>    |
| R49 (1.92)                                   | Flat R47 (1.85)                              | Lever R26 (1.02)                             | R15.5 (.61)                                 | Operation B9                                | Plate Mounting Screw |
|                                              |                                              |                                              |                                             |                                             |                      |
| 1.2 (4.2)                                    | 1.2 (4.2)                                    | 2.8 (9.9)                                    | 4 (14.1)                                    | 4 (14.1)                                    |                      |
| 0.25 (.9)                                    | 0.25 (.9)                                    | 0.45 (1.6)                                   | 0.8 (2.8)                                   | 1 (3.5)                                     |                      |
| 6.2 (.24)                                    | 6.2 (.24)                                    | 3.2 (.125)                                   | 1.45 (.057)                                 | 1.5 (.059)                                  |                      |
| 2.1 <sup>±0.9</sup> (.083 <sup>±.035</sup> ) | 2.1 <sup>±0.9</sup> (.083 <sup>±.035</sup> ) | 105 <sup>±0.4</sup> (.041 <sup>±.016</sup> ) | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> ) | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> ) |                      |
| 8.4 (.33)                                    | 7.5 (.31)                                    | 4.5 (.18)                                    | 1.9 (.075)                                  | 1.9 (.075)                                  |                      |

|                     |                     |                      |  |
|---------------------|---------------------|----------------------|--|
| <b>Y 70 500 206</b> | <b>H 70 500 208</b> | <b>O2 70 500 218</b> |  |
|---------------------|---------------------|----------------------|--|

Y Side plate



H Horizontal single-pole mounting plate



O2 2-pole side mounting plate



K2 2-pole vertical mounting plate



To order, specify :

|                                      |                       |                     |                                                    |                                                |                                  |
|--------------------------------------|-----------------------|---------------------|----------------------------------------------------|------------------------------------------------|----------------------------------|
| <b>1</b> Switch Type                 | <b>2</b> Contact Type | <b>3</b> Connection | Example : 831810 C 2 ± Ø                           | <b>4</b> Actuators                             | <b>5</b> Actuator Position       |
| 831060<br>831090<br>831120<br>831540 | C<br>B<br>A           | 1<br>2<br>3         | To order actuators separately, use the 8 digit P/N | A<br>B<br>E<br>Q<br>T<br>B9<br>Ø = No actuator | L - Left (Standard)<br>R - Right |

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com




## Actuators

Cross-section of actuators 1 x 6.4 mm (.039 x .252 in.)


A

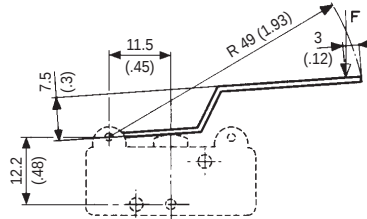


B




E

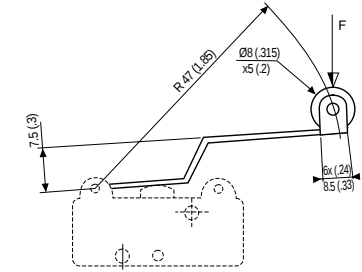


Q



B9




T




mm (in.)

## Assemblies


Y

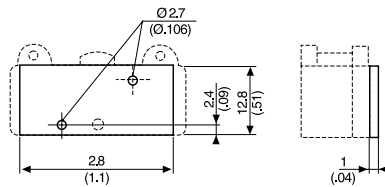


02

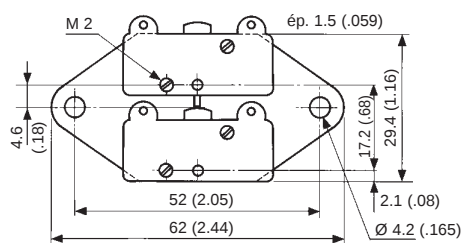

K2

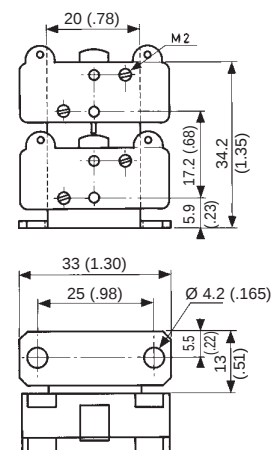

H



Unless indicated, the thickness of plates is 1.5 mm (.059 in.).


mm (in.)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



### Components

#### Material

- Case : polyester
- Contacts : silver
- Membrane : nitrile on 83 139 0  
silicone on 83 139 1 - 2 - 5

#### Actuators :

- stainless steel
- rollers : polyamide


- The NO and NC circuits must both be of the same polarity.

### Characteristics specific to 83 139 1

- Conform to standards EN 50 014 and 50 018
- Group II classified for explosive atmospheres other than mines subject to firedamp
- Temperature class T6, max. surface temperature 85°C
- LCIE certificate 880022U
- These switches can be enclosed in an envelope of a certified material, particularly to provide mechanical protection

- Degree of protection IP 67.

### Operating curve

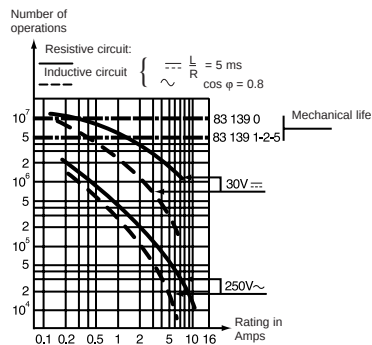

## Types

### Features

### Electrical characteristics

|                             | Nominal | A |
|-----------------------------|---------|---|
| Current rating at 125-250 V |         |   |

### Mechanical characteristics

|                         |            |
|-------------------------|------------|
| Operating force - max.  | N (oz)     |
| Release force - min.    | N (oz)     |
| Max. total travel force | N (oz)     |
| Overtravel max. - force | N (oz)     |
| Maximum rest position   | mm (in)    |
| Tripping point          | mm (in)    |
| Movement differential   | mm (in)    |
| Overtravel - min.       | mm (in)    |
| Operating temperature   | °C (F°)    |
| Mechanical life         | Operations |
| Contact gap             | mm (in)    |
| Weight                  | g (oz)     |

### Contact Type

C (Form C) SPDT

### Mounting Holes

4 holes = A standard

2 holes = B

### Connections

Lead position bottom - standard

Lead position right

Lead position left

### Actuators

#### Part numbers for standard actuators

|                 |         |
|-----------------|---------|
| Actuator-Length | mm (in) |
|-----------------|---------|

|                        |         |
|------------------------|---------|
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Movement differential  | mm (in) |

#### Part numbers for standard actuators

|                 |         |
|-----------------|---------|
| Actuator-Length | mm (in) |
|-----------------|---------|

|                        |         |
|------------------------|---------|
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Movement differential  | mm (in) |

## Other information

For other forces, actuators, connections and temperatures, lead lengths, please consult factory.

 Normally stocked items

 Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



|                                                                                               |                                                                                               |                                                                                                   |                                                                                               |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>1</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>83 139 0</b>                                                                               | <b>83 139 5</b>                                                                               | <b>83 139 2</b>                                                                                   | <b>83 139 1</b>                                                                               |
| Standard                                                                                      | Low temperature                                                                               | Double insulation to NFC 20030 standard classe II                                                 | Explosion proof EEX d 11C T6                                                                  |
| 5                                                                                             | 5                                                                                             | 5                                                                                                 | 5                                                                                             |
| 3 (10.6)                                                                                      | 3 (10.6)                                                                                      | 3 (10.6)                                                                                          | 3 (10.6)                                                                                      |
| 0.6 (2.1)                                                                                     | 0.6 (2.1)                                                                                     | 0.6 (2.1)                                                                                         | 0.6 (2.1)                                                                                     |
| 4 (14.1)                                                                                      | 4 (14.1)                                                                                      | 4 (14.1)                                                                                          | 4 (14.1)                                                                                      |
| 10 (35.3)                                                                                     | 10 (35.3)                                                                                     | 10 (35.3)                                                                                         | 10 (35.3)                                                                                     |
| A = 8.8 (.35) B = 9.8 (.39)                                                                   | A = 8.8 (.35) B = 9.8 (.39)                                                                   | B = 9.8 (.39)                                                                                     | B = 9.8 (.39)                                                                                 |
| A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) | A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) | 8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> )                                                      | A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) |
| 0.35±0.1 (.014±.004)                                                                          | 0.35±0.1 (.014±.004)                                                                          | 0.35±0.1 (.014±.004)                                                                              | 0.35±0.1 (.014±.004)                                                                          |
| 0.3 (.012)                                                                                    | 0.3 (.012)                                                                                    | 0.3 (.012)                                                                                        | 0.3 (.012)                                                                                    |
| 0 to 85 (32 to 185)                                                                           | 0 to 85 (32 to 185)                                                                           | -40 to 85 (-40 to 185)                                                                            | -40 to 85 (-40 to 185)                                                                        |
| 10 <sup>7</sup>                                                                               | 5 x 10 <sup>7</sup>                                                                           | 5 x 10 <sup>6</sup>                                                                               | 5 x 10 <sup>6</sup>                                                                           |
| 0.3 x 2 (.012 x .008)                                                                         | 0.3 x 2 (.012 x .008)                                                                         | 0.3 x 2 (.012 x .008)                                                                             | 0.3 x 2 (.012 x .008)                                                                         |
| 37 (1.3)                                                                                      | 37 (1.3)                                                                                      | 45 (1.6)                                                                                          | 37 (1.3)                                                                                      |
| <b>2</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>C</b>                                                                                      | <b>C</b>                                                                                      | <b>C</b>                                                                                          | <b>C</b>                                                                                      |
| <b>3</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>A</b>                                                                                      | <b>A</b>                                                                                      |                                                                                                   |                                                                                               |
| <b>B</b>                                                                                      | <b>B</b>                                                                                      | <b>B</b>                                                                                          | <b>B</b>                                                                                      |
| <b>4</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>4 flexible leads</b> ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                            | <b>4 flexible leads</b> ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                            | <b>3 lead cable</b> 3 x 0.75 mm <sup>2</sup> length 0.50 m                                        | <b>4 flexible leads</b> ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                            |
| <b>B</b>                                                                                      | <b>B</b>                                                                                      | <b>B</b>                                                                                          | <b>B</b>                                                                                      |
| <b>R</b>                                                                                      | <b>R</b>                                                                                      |                                                                                                   | <b>R</b>                                                                                      |
| <b>L</b>                                                                                      | <b>L</b>                                                                                      |                                                                                                   | <b>L</b>                                                                                      |
| <b>5</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>6</b>                                                                                      |                                                                                               |                                                                                                   |                                                                                               |
| <b>P</b>                                                                                      | <b>R</b>                                                                                      | <b>A</b> <b>79 215 740</b>                                                                        | <b>B</b> <b>79 507 524</b>                                                                    |
| <b>E</b> <b>79 215 742</b>                                                                    | <b>G</b> <b>70 507 529</b>                                                                    |                                                                                                   |                                                                                               |
| Flat <b>139 AX</b> R29.7 (1.17)**                                                             | Roller <b>139 EX</b> R28.7 (1.13)**                                                           | Flat <b>161A</b> R14.2 (.56) – R25.4 (1.0)                                                        | Roller <b>161 E</b> R13.6 (.54) – R24.1 (.94)                                                 |
|                                                                                               |                                                                                               |                                                                                                   |                                                                                               |
| 1.5 (5.3)                                                                                     | 1.5 (5.3)                                                                                     | 2.6 (9.2)                                                                                         | 2.6 (9.2)                                                                                     |
| 0.2 (.7)                                                                                      | 0.2 (.7)                                                                                      | 0.35 (1.2)                                                                                        | 0.35 (1.2)                                                                                    |
| 1.5 (.06)                                                                                     | 1.5 (.06)                                                                                     | 0.7 (.028)                                                                                        | 0.7 (.028)                                                                                    |
| <b>F</b> <b>79 218 581</b>                                                                    | <b>H</b> <b>79 218 651</b>                                                                    | <b>Note</b> : When mounting actuators, a light greasing of the switch push-button is recommended. |                                                                                               |
| Flat <b>161F</b> R22.3 (1.17)                                                                 | Dummy roller <b>161 G</b> R21.8 (.86)                                                         |                                                                                                   |                                                                                               |
|                                                                                               |                                                                                               |                                                                                                   |                                                                                               |
| 2 (7.1)                                                                                       | 2 (7.1)                                                                                       |                                                                                                   |                                                                                               |
| 0.2 (.7)                                                                                      | 0.2 (.7)                                                                                      |                                                                                                   |                                                                                               |
| 1.1 (.043)                                                                                    | 1.1 (.043)                                                                                    |                                                                                                   |                                                                                               |

\*\* Factory mounted only

To order, please specify :


|                                                                                                       |                       |                                                    |                                                 |
|-------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------|-------------------------------------------------|
| Example : 831390 C A B 5 A                                                                            |                       |                                                    |                                                 |
| <b>1</b> Switch Type                                                                                  | <b>2</b> Contact Type | <b>3</b> Mounting Holes                            | <b>4</b> Connection                             |
| 831390<br>831391<br>831392<br>831395                                                                  | C                     | A<br>B                                             | B<br>R<br>L                                     |
|                                                                                                       |                       | <b>5</b> Lead Length                               | <b>6</b> Actuators                              |
|                                                                                                       |                       | .5 - 1/2 meter (std)<br>1 - 1 meter<br>2 - 2 meter | A F P<br>B H R<br>E<br>G Ø                      |
| Example switch is: 831390, DBDT, 4 mounting holes, leads exit bottom, .5 meter cable with A actuator. |                       |                                                    | To order actuators separately, use 8 digit P/N. |

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Dimensions


83 139 0 - 5 - Mounting A = 4 holes

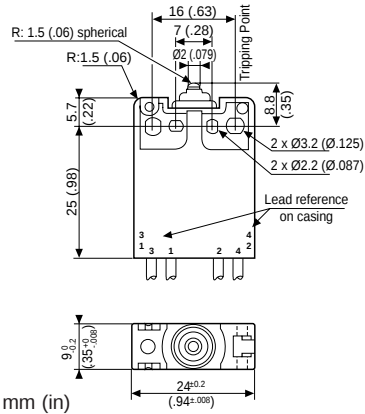

83 139 0 - 1 - 5 - Mounting B = 2 holes


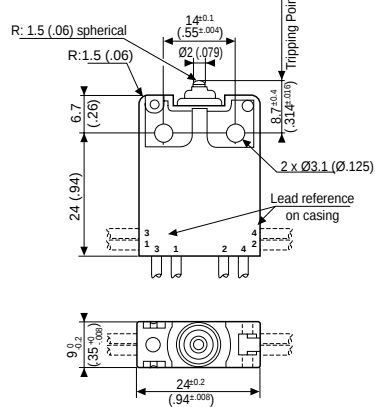


83 139 2

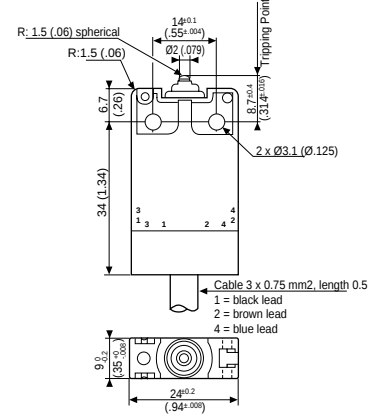


## Actuators Factory Mounted Only


Actuators mounting position (type 139)

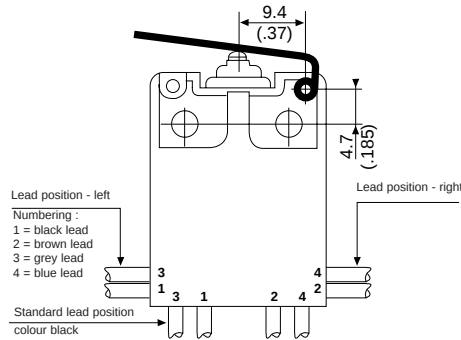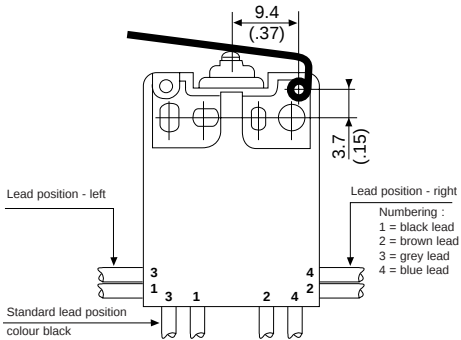

R

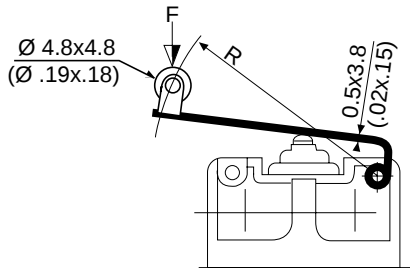

P





mm (in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators User or Factory Mounted


Actuators mounting position (type 161)

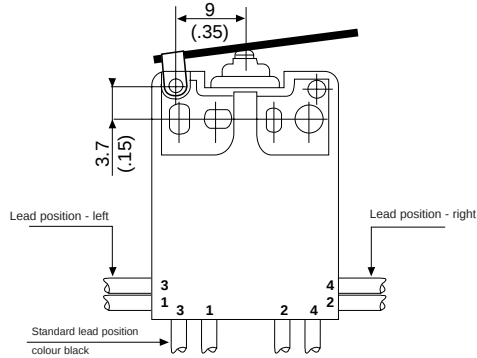


A - B

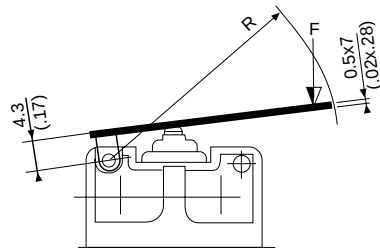


E - G

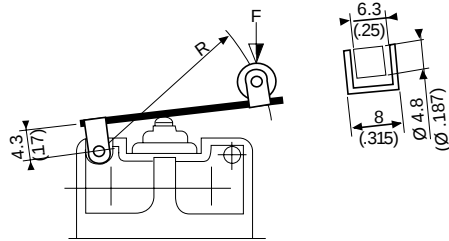

F

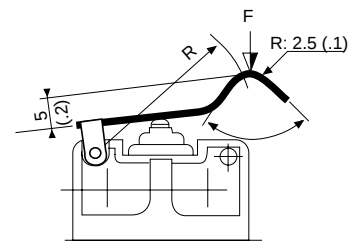

H




mm (in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



83 169

### Components

#### Material


- Case : polyester UL 94 VO
- Contacts : nickel silver gold alloy (low current)
- Membrane : Fluoro - silicone

#### Actuators


- stainless steel
- rollers : polyamide
- Plunger : stainless steel

### Operating curve

83 169 0



83 169 4



### Operating characteristics

83 169 8 and 83 169 9 low current

Intended for use from 1 to 100 mA at 4 to 30 V DC.

Under these conditions, electrical life exceeds mechanical life.

### Degree of protection IP 67

Approvals: UL, cUL (CSA Equivalent)

## Types

### Features

### Electrical characteristics

|                             | Nominal | A |
|-----------------------------|---------|---|
| Current rating at 125-250 V |         |   |

### Mechanical characteristics

|                          |            |
|--------------------------|------------|
| Operating force - max.   | N (oz)     |
| Release force - min.     | N (oz)     |
| Maximum overtravel force | N (oz)     |
| Overtravel max. - force  | N (oz)     |
| Maximum rest position    | mm (in)    |
| Tripping point           | mm (in)    |
| Movement differential    | mm (in)    |
| Overtravel - min.        | mm (in)    |
| Temperature              | °C (F°)    |
| Endurance                | Operations |
| Contact gap              | mm (in)    |
| Weight                   | g (oz)     |

### Contact Type

C (Form C) SPDT

### Connections

Flexible leads  $\varnothing 3 \times 1 \text{ mm}^2$  long 0.50 m

Lead position - right

Lead position - left

3 lead cable -  $3 \times 0.75 \text{ mm}^2$  length 0.50 m, left output only

### Actuators and mounting positions-user or factory mounted

#### Part numbers for standard actuators

P

Actuator-Length mm (in.) \*\* Flat **139 AX** R29.7 (1.17)



#### Mounting positions

D

|                        |         |                    |
|------------------------|---------|--------------------|
| Operating force - max. | N (oz)  | 2.5 (8.8)          |
| Release force - min.   | N (oz)  | 0.4 (1.4)          |
| Movement differential  | mm (in) | 1.2-0.5 (.047-.02) |

#### Part numbers for standard actuators

|                                                                               |         |
|-------------------------------------------------------------------------------|---------|
| Mounting positions                                                            | N (oz)  |
| Operating force - max.                                                        | N (oz)  |
| Release force - min.                                                          | mm (in) |
| Movement differential                                                         |         |
| Unless indicated, flat actuators and roller actuators are delivered unmounted |         |
| ** Factory Mounted Only                                                       |         |

**Note :** When mounting actuators a light greasing of the switch push-button is recommended.

## Other information

For other forces, actuators, connections and temperatures, please contact factory.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



1

| 83 169 0 | 83 169 4 | 83 169 8 | 83 169 9 |
|----------|----------|----------|----------|
|----------|----------|----------|----------|

| Standard                                     | Reduced differential movement                | Low current                                  | Low current, reduced differential movement   |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| 10                                           | 5                                            | 0.1                                          | 0.1                                          |
| 4 (14.1)                                     | 4 (14.1)                                     | 4 (14.1)                                     | 4 (14.1)                                     |
| 1 (3.5)                                      | 1 (3.5)                                      | 1 (3.5)                                      | 1 (3.5)                                      |
| 8 (28.2)                                     | 8 (28.2)                                     | 8 (28.2)                                     | 8 (28.2)                                     |
| 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    |
| 15.9 (.63)                                   | 15.9 (.63)                                   | 15.9 (.63)                                   | 15.9 (.63)                                   |
| 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) |
| 0.35 (.014)                                  | 0.07 (.003)                                  | 0.35 (.014)                                  | 0.07 (.003)                                  |
| 1 (.04)                                      | 0.4 (.016)                                   | 1 (.04)                                      | 0.4 (.016)                                   |
| -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        |
| 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          |
| 0.4 (.016)                                   | 0.4 (.016)                                   | 0.4 (.016)                                   | 0.4 (.016)                                   |
| 30 (1.06)                                    | 30 (1.06)                                    | 30 (1.06)                                    | 30 (1.06)                                    |

2

| C | C | C | C |
|---|---|---|---|
|---|---|---|---|

3

| R                | R | R | R | (1) 83 169 0 Cable limits current to 8 Amps |
|------------------|---|---|---|---------------------------------------------|
| L                | L | L | L |                                             |
| C <sup>(1)</sup> | C | C | C |                                             |

4

| R | A | B | E | G |
|---|---|---|---|---|
|---|---|---|---|---|

\*\*Roller 139 EX R28.7 (1.13) Flat 161 A R14.2 (.56) - R25.4 (1) Roller 161 E R13.6 (.54) - R24.1 (.95)



| D                  |
|--------------------|
| 2.5 (8.8)          |
| 0.4 (1.4)          |
| 1.2-0.5 (.047-.02) |



| A          | B          |
|------------|------------|
| 2.5 (8.8)  | 4.2 (14.8) |
| 0.5 (1.8)  | 1 (3.5)    |
| 0.8 (.032) | 0.4 (.016) |



| A          | B          | C          |
|------------|------------|------------|
| 1.4 (4.9)  | 2.5 (8.8)  | 3.5 (12.3) |
| 0.25 (.88) | 0.5 (1.8)  | 0.6 (2.1)  |
| 1.6 (.063) | 0.8 (.032) | 0.6 (.024) |




| A          | B          |
|------------|------------|
| 2.5 (8.8)  | 4.2 (14.8) |
| 0.5 (1.8)  | 1 (3.5)    |
| 0.8 (.032) | 0.4 (.016) |



| A          | B          | C          |
|------------|------------|------------|
| 1.4 (4.9)  | 2.5 (8.8)  | 3.5 (12.3) |
| 0.25 (.88) | 0.5 (1.8)  | 0.6 (2.1)  |
| 1.6 (.063) | 0.8 (.032) | 0.6 (.024) |

F 79 218 581

Flat 161 F R22.3 (.88)



| A         | B          |
|-----------|------------|
| 1.5 (5.3) | 2.6 (9.2)  |
| 0.25 (.9) | 0.5 (1.8)  |
| 16 (.63)  | 0.8 (.032) |

H 79 218 651

Dummy roller 161 G R21.8 (.86)



| A         | B          |
|-----------|------------|
| 1.5 (5.3) | 2.6 (9.2)  |
| 0.25 (.9) | 0.5 (1.8)  |
| 16 (.63)  | 0.8 (.032) |

Ø

No Actuator

For more actuators see 83161

5

To order, please specify :

Example : 831690 C R .5 - Ø -

|                                                              |                            |                                     |                                                                                |                                       |                                |
|--------------------------------------------------------------|----------------------------|-------------------------------------|--------------------------------------------------------------------------------|---------------------------------------|--------------------------------|
| <b>1</b> Switch Type<br>831690<br>831694<br>831698<br>831699 | <b>2</b> Contact Type<br>C | <b>3</b> Connections<br>R<br>L<br>C | <b>4</b> Length of Leads<br>.5 - 1/2 meter (std)<br>1 - 1 meter<br>2 - 2 meter | <b>5</b> Actuator<br>Ø<br>A<br>B<br>H | <b>6</b> Actuator Position<br> |
|--------------------------------------------------------------|----------------------------|-------------------------------------|--------------------------------------------------------------------------------|---------------------------------------|--------------------------------|


Example switch is: 831690, SPDT, leads exit right, .5 meter leads, with no actuator. To order actuators separately, use the 8 digit P/N.

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

## Dimensions

### Output wires

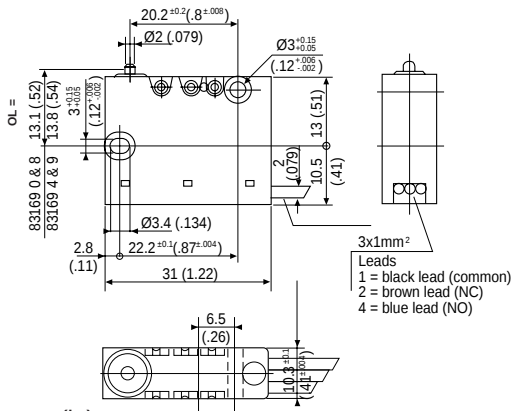


### Output cable

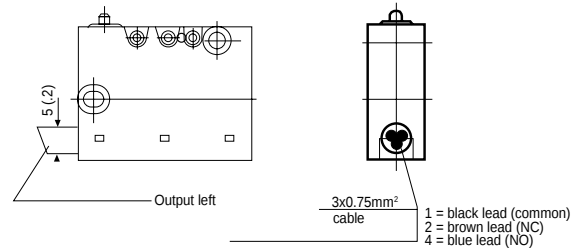


mm (in)

## Actuators


### Mounting position for factory mounted actuators




### Mounting position for factory or customer mounted actuators




P




R

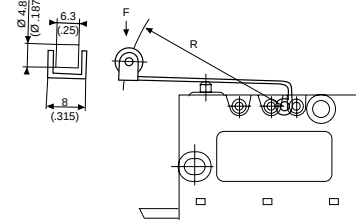


A - B




E - G

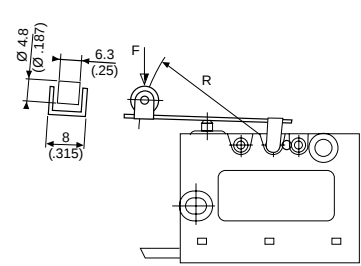

F



H



mm (in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Sealed Flat Pack Switches Series 83 123 IP 66



## General specifications

### Layout




### Components

#### Material

- Casing : nitrile
- Contacts : silver
- Contact holder : polyamide
- Mounting plate : passivated mild steel (zinc)

### Operating curve



### Degree of protection IP 66

### Mounting - Operation

In order to comply with basic safety requirements, an insulator must be used if the device is being operated manually. One of the fixing holes must be used as a protective earth.

## Types

|                                   |         |            | 83 123 0<br>Standard                          | 83 123 0<br>Raised Button                     |
|-----------------------------------|---------|------------|-----------------------------------------------|-----------------------------------------------|
| <b>Features</b>                   |         |            |                                               |                                               |
| <b>Electrical characteristics</b> |         |            |                                               |                                               |
| Current rating at 250 V           | Nominal | A          | 5                                             | 5                                             |
|                                   | Thermal | A          | 12                                            | 12                                            |
| <b>Mechanical characteristics</b> |         |            |                                               |                                               |
| Operating force - max.            |         | N (oz)     | 5.3 (18.7)                                    | 5.3 (18.7)                                    |
| Release force - min.              |         | N (oz)     | 1.5 (5.3)                                     | 1.5 (5.3)                                     |
| Total travel force - max.         |         | N (oz)     | 8 (28.2)                                      | 8 (28.2)                                      |
| Permitted overtravel force - max. |         | N (oz)     | 30 (106)                                      | 30 (106)                                      |
| Tripping point                    |         | mm (in)    | 11.4 <sup>+0.4</sup> (.45 <sup>+0.016</sup> ) | 17.4 <sup>+0.5</sup> (.45 <sup>+0.016</sup> ) |
| Differential travel               |         | mm (in)    | 0.2 (.008)                                    | 0.2 (.008)                                    |
| Overtravel - min.                 |         | mm (in)    | 0.2 (.008)                                    | 0.2 (.008)                                    |
| Maximum operating temperature     |         | °C (F°)    | 0+85 (32+185)                                 | 0+85 (32+185)                                 |
| Mechanical durability             |         | Operations | 2 x 10 <sup>6</sup>                           | 2 x 10 <sup>6</sup>                           |
| Contact gap                       |         | mm (in)    | 0.2 (.008)                                    | 0.2 (.008)                                    |
| Weight                            |         | g (oz)     | 45 (1.6)                                      | 50 (1.6)                                      |

### Contact Type

C (Form C SPDT)

C

C

### Connections


Output by A05 VVF cable , 3 x 0.75 mm<sup>2</sup> cores in sheath of 7.6 mm ext. Ø.

### Standard length 0.50 m



Common (1) : black  
Normally closed (2) : brown  
Normally open (4) : blue

### Dimensions

#### Standard 83 123

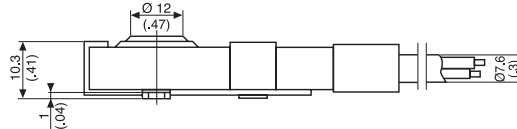

#### Raised button 83 123

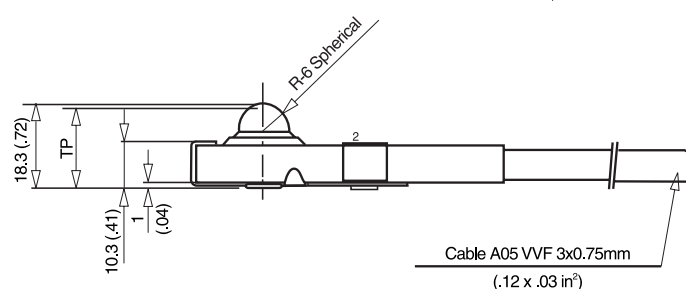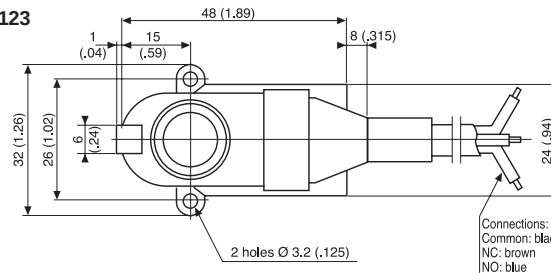

mm (in)


| Other information                                            | To order, specify : |               |
|--------------------------------------------------------------|---------------------|---------------|
| For other cable lengths and temperatures, please consult us. | Standard            | Raised Button |
|                                                              | 0.5m = 83 123 018   | 83 123 018.RB |
|                                                              | 1.0m = 83 123 015   | 83 123 015.RB |
|                                                              | 2.0m = 83 123 005   | 83 123 005.RB |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

Low Force Position Detectors Series 81 290



- Conforms to standard DIN 43365 Form A
- Low activation force < 1.7 oz. (50 g @ at 6 bars) at 90 psi
- No continuous consumption of compressed air



Part numbers

|              |               |            |            |
|--------------|---------------|------------|------------|
| Contact type | (Form B) SPNC | 81 290 501 | —          |
|              | (Form A) SPNO | —          | 81 290 001 |

Symbol




Characteristics


|                                       |             |                          |             |                          |             |
|---------------------------------------|-------------|--------------------------|-------------|--------------------------|-------------|
| Orifice diameter                      | inches(mm)  | 5/64"                    | (2)         | 5/64"                    | (2)         |
| Operating pressure                    | psi(bar)    | 30 > 120                 | (2 > 8)     | 30 > 120                 | (2 > 8)     |
| Flow at 60 psi(4 bars)                | cfm(Nl/min) | 4.5                      | (130)       | 2.5                      | (>70)       |
| Activation force at 90 (6 bars)       | ounces(g)   | <1.7                     | (< 50)      | <1.7                     | (< 50)      |
| Permissible fluid: air, inert gases   |             |                          |             |                          |             |
| Max/min. of fluid temperatures        | °F(°C)      | +20> +120                | (-10 > +50) | +20> +120                | (-10 > +50) |
|                                       | °F(°C)      | +20> +140                | (-10 > +60) | +20> +140                | (-10 > +60) |
|                                       | °F(°C)      | +20> +160                | (-40 > +70) | +20> +160                | (-40 > +70) |
| Mechanical life at 90psi (6 bars)     | cycles      | 10 million               |             | 10 million               |             |
| Response on activation                | ms          | ≤ 15                     |             | ≤ 15                     |             |
| time on release                       | ms          | ≤ 15                     |             | ≤ 15                     |             |
| Barb connection for semi-rigid tubing | inches(mm)  | 0.106" I.D. x 5/32" O.D. | (2.7x4)     | 0.106" I.D. x 5/32" O.D. | (2.7x4)     |
| Weight                                | grams       | 8.5                      |             | 8.5                      |             |

Principle of NC operation

Deactivated

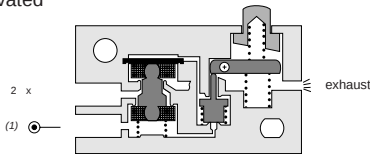


Activated




Operation accessories

Unless otherwise requested, flat and roller-ended actuators are supplied loose.


161 A  
flat  
79 215 741



161 E  
roller  
79 215 743




Dimensions

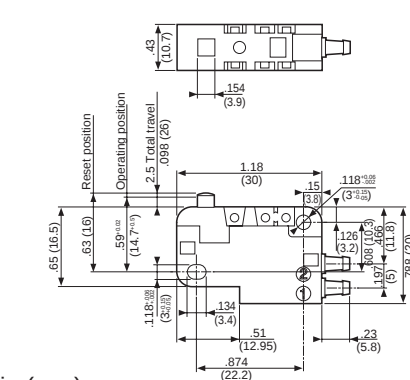


in (mm)

Use (metric) dimensions for critical data

161 A




161 E

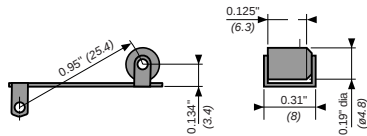

| Other information                                              | To order, specify :                                                                                                                                                                       |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On request :<br>Wide range of actuators<br>Connectable exhaust | <div>Standard products</div> <div><div>1</div>Part number</div> <div><div>2</div>Accessory</div> <div>Example : Low force position detector 81 290 501<br/>Flat actuator 79 215 741</div> |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

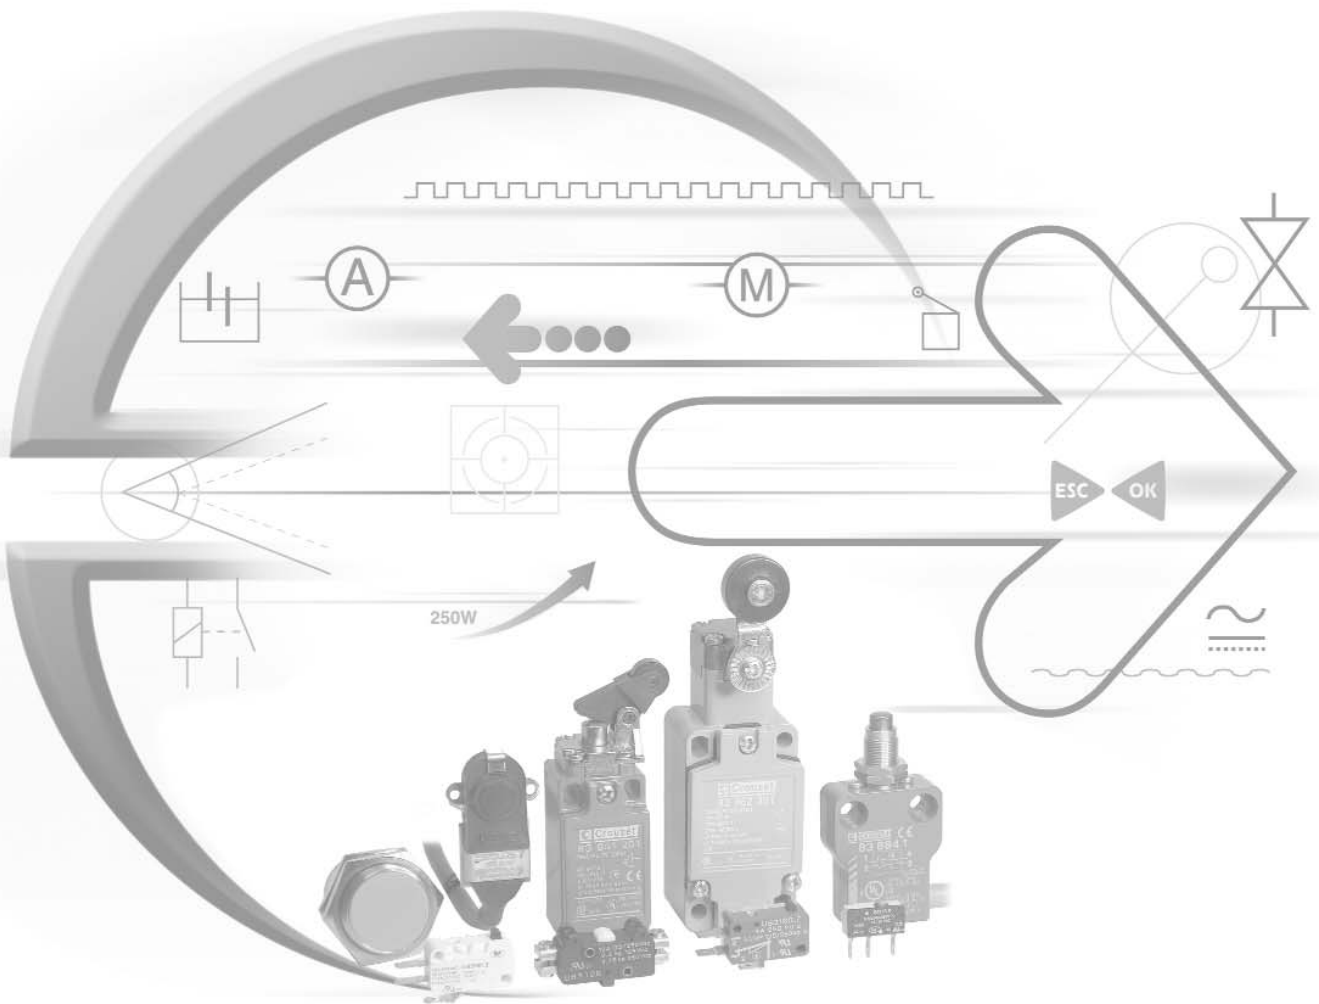


# Industrial Limit Switches



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Miniature Industrial Limit Switches Series 83 852 / 83 853 EN 50047

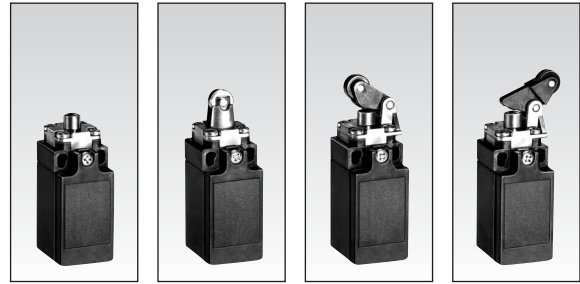

## Conform to the following standards :


IEC 536-1, IEC 947-5-1,  
CSA C22.2 No. 14, EN 50047,  
EN 60947-5-1, EN 60204-1,  
NFC 20030 class I for 83 852  
class II for 83 853  
UL 508, VDE 0660/200.

**Degree of protection :** IP 66  
**Version :** 1 pole


**Function :** Four-terminal double break contact element (form Zb) with positive opening NC contacts.  
The two moving contacts are electrically isolated from one another.

## Principle :

Independent snap action contact  
1 NO + 1 NC



Dependent action  
1 NO + 1 NC



Break Before Make

## Electrical characteristics

Assigned insulation voltage (Ui) :  
500 V  
Thermal rating (Ith) : 10 A  
Use category : A300 - Q300  
AC15 = 6A/250 V - 1.9 A / 380 V  
DC 13 = 3A/24 V

## Short circuit test (under IEC 947.5.1 § 8.3.4)

- Current peak 1000 A at 250 V ~ 0.5 < cos φ < 0.7
- Short circuit protection (SCPD) : fuse 10 A gF
- Electrical protection by internal earth terminal (83 852)

## Connections :

Saddle washer and M 3.5 screw  
Max. wire cross-section : 2 x 1.5 mm<sup>2</sup>  
or 1 x 2.5 mm<sup>2</sup>

## Connection :

For 1/2" NPT

## Approvals :

UL listed A300 - Q300 -  
CSA A300 - Q300

## Types

|                                                                   |                                 |            |            |            |            |
|-------------------------------------------------------------------|---------------------------------|------------|------------|------------|------------|
| Thermoplastic case with double insulation and metal actuator head | Independent snap action NC + NO | 83 853 001 | 83 853 501 | 83 853 101 | 83 853 201 |
|                                                                   | Dependent action NC + NO        | 83 853 011 | 83 853 511 | 83 853 111 | 83 853 211 |
| Metal bodies and actuator heads                                   | Independent snap action NC + NO | 83 852 001 | 83 852 501 | 83 852 101 | 83 852 201 |
|                                                                   | Dependent action NC + NO        | 83 852 011 | 83 852 511 | 83 852 111 | 83 852 211 |

Control mechanisms - adjustable actuator heads 4 positions 90°

Steel plunger

Plunger with steel roller

Lever with plastic roller

vertical lateral

**Rotary head, momentary action to right and left <sup>(1)</sup>**

With lever and

Ø 22 offset 40

plastic roller

Ø 19 offset 53

Ø 50 offset 47

offset 53.5

With adjustable

Ø 22 offset 32.5

lever and plastic

or 45

roller

offset 46

adjustable offset


53.5 to 69.5

**With adjustable polyamide rod actuator**

**Flexible metal lever**

<sup>(1)</sup> Action either right or left according to position of head

|                         |                            |
|-------------------------|----------------------------|
| Independent snap action | 21-22 13-14 0 1.8 4.5F 6mm |
| Dependent action        | 21-22 13-14 0 1.8 3.2F 6mm |



Positive break operation



## Mechanical characteristics

|                                                |                       |                 |                 |                 |                 |
|------------------------------------------------|-----------------------|-----------------|-----------------|-----------------|-----------------|
| Minimum operating force                        | N (oz.)               | 10 (35.3)       | 10 (35.3)       | 9 (31.7)        | 9 (31.7)        |
| Minimum total travel force                     | N (oz.)               | 12 (42.3)       | 12 (42.3)       | 10 (35.3)       | 10 (35.3)       |
| Minimum positive opening force                 | N (oz.)               | 25 (88.2)       | 25 (88.2)       | 20 (70.5)       | 20 (70.5)       |
| Minimum operating travel                       | mm (in.)              | 5 (.2)          | 5 (.2)          | 5 (.2)          | 5 (.2)          |
| Minimum positive opening travel                | mm (in.)              | 6 (.24)         | 6 (.24)         | 6.5 (.247)      | 6.5 (.247)      |
| Differential travel                            | mm (in.)              | 1.5 (.06)       | 1.5 (.06)       | 1.5 (.06)       | 1.5 (.06)       |
| Max. total travel                              | mm (in.)              | 6 (.24)         | 6 (.24)         | 6 (.24)         | 6 (.24)         |
| Mechanical life (millions of operations) mini. |                       | 15              | 15              | 15              | 15              |
| Temperature Use                                | °C (°F)               | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) |
| limits Stored                                  | °C (°F)               | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) |
| Degree of protection                           |                       | IP 66           | IP 66           | IP 66           | IP 66           |
| Weight                                         | Series 83 853 g (oz.) | 90 (3.2)        | 100 (3.5)       | 100 (3.5)       | 105 (3.7)       |
|                                                | Series 83 852 g (oz.) | 170 (6)         | 180 (6.3)       | 180 (6.3)       | 180 (6.3)       |

## Other information


For other contact types and accessories or special modes of operation : please consult us.  
For dimensions see page 3/38.

## Replacement contact block

| Part number | Configurations | Function               |
|-------------|----------------|------------------------|
| 83157401    | SPDT           | <STD>                  |
| 83157402    | SPDT           | Break before make      |
| 83157403    | SPDT           | Make before break      |
| 83157404    | 2 NO           | DPST - Normally open   |
| 83157405    | 2 NC           | DPST - Normally closed |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

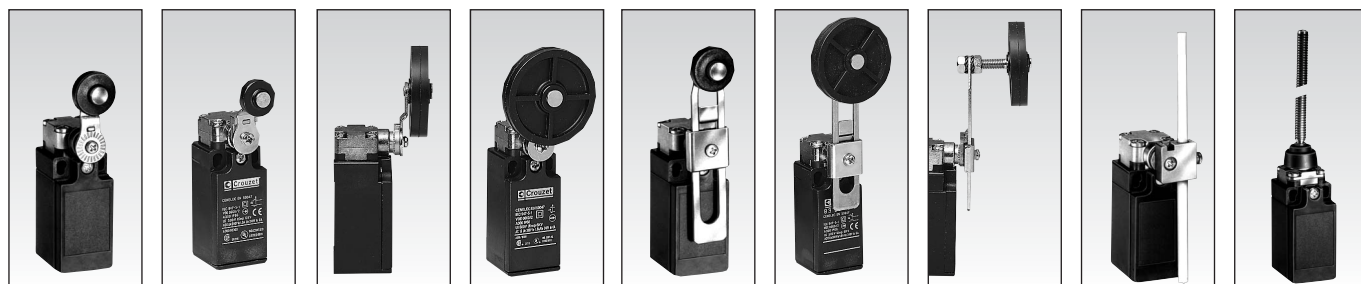

1

| 83 853 301 | 83 853 302 | 83 853 305 | 83 853 306 | 83 853 303 | 83 853 307 | 83 853 308 | 83 853 304 | 83 853 601 |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 83 853 311 | 83 853 312 | 83 853 315 | 83 853 316 | 83 853 313 | 83 853 317 | 83 853 318 | 83 853 314 | 83 853 611 |
| 83 852 301 | 83 852 302 | 83 852 305 | 83 852 306 | 83 852 303 | 83 852 307 | 83 852 308 | 83 852 304 | 83 852 601 |
| 83 852 311 | 83 852 312 | 83 852 315 | 83 852 316 | 83 852 313 | 83 852 317 | 83 852 318 | 83 852 314 | 83 852 611 |

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

3

|                 |                 |                 |                 |                 |                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 3 (10)          |
| 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 4.5 (16)        |
| 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) |                 |
| 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             |
| 60°             | 60°             | 60°             | 60°             | 60°             | 60°             | 60°             | 60°             |                 |
| 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             |
| 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             |
| 15              | 15              | 15              | 15              | 15              | 15              | 15              | 15              | 15              |
| -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) |
| -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) |
| IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           |
| 130 (4.6)       | 130 (4.6)       | 130 (4.6)       | 130 (4.6)       | 130 (4.6)       | 153 (5.4)       | 153 (5.4)       | 153 (5.4)       | 130 (4.6)       |
| 205 (7.23)      | 205 (7.23)      | 205 (7.23)      | 205 (7.23)      | 205 (7.23)      | 225 (7.93)      | 225 (7.93)      | 225 (7.93)      | 200 (7.1)       |


To order, specify :

|  |                                |                                   |             |
|--|--------------------------------|-----------------------------------|-------------|
|  | Standard products              |                                   | Part number |
|  | Standard products, non stocked | Example : Limit switch 83 853 001 |             |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Industrial Limit Switches Series 83 862 EN 50041

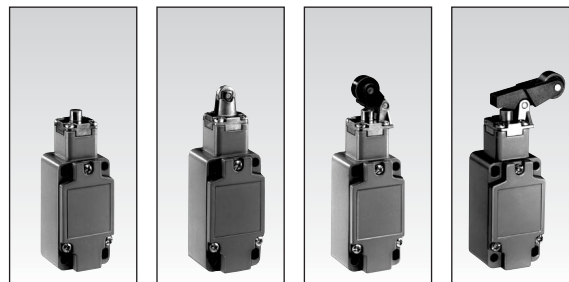


**Conform to the following standards :**  
EN 50041, IEC 947-5-1, VDE 0660/200  
UL 508, CSA C22.2 No.14  
IEC 536-1, EN 60204-1, NFC 20030  
class I


**Degree of protection :** IP 66

**Function :** Four-terminal double break  
contact element (form Zb) with positive  
opening NC contacts.  
The two moving contacts are  
electrically isolated from one another.

**Principle :**  
Independent  
snap  
action contact  
1 NO + 1 NC



**Dependent  
action**  
1 NO + 1 NC



Break before make

## Electrical characteristics :

Assigned insulation voltage (Ui) :  
500 V  
Thermal rating (Ith) : 10 A  
Use category : A300 - Q300  
AC15 = 6A/250 V - 1.9 A / 380 V  
DC 13 = 3A/24 V

**Short circuit test** (under  
IEC 947.5.1 § 8.3.4)  
- Current peak 1000 A  
at 250 V ~ 0.5 < cos φ < 0.7  
- Short circuit protection (SCPD) :  
fuse 10 A gF  
- Electrical protection by internal earth  
terminal

## Connections :

Saddle washer and M 3.5 screw  
Max. wire cross-section : 2 x 1.5 mm<sup>2</sup>  
or 2.5 mm<sup>2</sup>

## Connection :

1/2" NPT

## Approvals :

UL listed A300 - Q300 -  
CSA A300 - Q300

## Types

|                                                                   |            |            |            |            |
|-------------------------------------------------------------------|------------|------------|------------|------------|
| Dependent action NC + NO                                          | 83 862 011 | 83 862 511 | 83 862 111 | 83 862 211 |
| Independent snap action NC + NO                                   | 83 862 001 | 83 862 501 | 83 862 101 | 83 862 201 |
| Control mechanisms - adjustable<br>actuator heads 4 positions 90° | •          | •          | •          | •          |
| Steel plunger                                                     | •          |            |            |            |
| Plunger with steel roller                                         |            | •          |            |            |
| Lever with vertical<br>plastic roller                             |            |            | •          |            |
| lateral                                                           |            |            |            | •          |

## Rotary head, momentary action to clockwise and/or anti-clockwise (1)

|                                                |                               |  |  |  |
|------------------------------------------------|-------------------------------|--|--|--|
| Ø 22 offset 43.5                               |                               |  |  |  |
| With lever and<br>plastic roller               | Ø 19 offset 56                |  |  |  |
|                                                | offset 50.5                   |  |  |  |
|                                                | Ø 50 offset 57                |  |  |  |
| With adjustable<br>lever and plastic<br>roller | Ø 22 offset 36 or 48          |  |  |  |
|                                                | Ø 50 offset 49                |  |  |  |
|                                                | adjustable offset<br>57 to 73 |  |  |  |
| With adjustable polyamide rod actuator         |                               |  |  |  |
| Flexible metal lever                           |                               |  |  |  |
| Independent snap action                        |                               |  |  |  |

## Sequence

|                          |  |  |  |  |
|--------------------------|--|--|--|--|
| Dependent action         |  |  |  |  |
| Positive break operation |  |  |  |  |

## Mechanical characteristics

|                                                |          |                 |                 |                 |                 |
|------------------------------------------------|----------|-----------------|-----------------|-----------------|-----------------|
| Minimum operating<br>force                     | N (oz.)  | 10 (35.5)       | 10 (35.5)       | 9 (31.7)        | 9 (31.7)        |
| Minimum total<br>travel force                  | N (oz.)  | 12 (42.3)       | 12 (42.3)       | 10 (35.3)       | 10 (35.3)       |
| Minimum positive<br>opening travel             | N (oz.)  | 25 (88.2)       | 25 (88.2)       | 20 (70.5)       | 20 (70.5)       |
| Minimum operating travel                       | mm (in.) | 5 (.2)          | 5 (.2)          | 5 (.2)          | 5 (.2)          |
| Minimum positive<br>opening travel             | mm (in.) | 6 (.24)         | 6 (.24)         | 6.5 (.26)       | 6.5 (.26)       |
| Differential travel                            | mm (in.) | 1.5 (.06)       | 1.5 (.06)       | 1.5 (.06)       | 1.5 (.06)       |
| Max. total travel                              | mm (in.) | 6 (.24)         | 6 (.24)         | 6 (.24)         | 6 (.24)         |
| Mechanical life (millions of operations) mini. |          | 15              | 15              | 15              | 15              |
| Temperature Use                                | °C (°F)  | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) |
| limits Stored                                  | °C (°F)  | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) |
| Degree of protection                           |          | IP 66           | IP 66           | IP 66           | IP 66           |
| Weight                                         | g (oz.)  | 305 (10.76)     | 315 (11.11)     | 320 (11.28)     | 325 (11.46)     |

(1) Action either right or left according to position of head

## Accessories

|                             |           |            |  |
|-----------------------------|-----------|------------|--|
| Cover with status indicator | 24.30 V ~ | 79 250 290 |  |
| (supplied loose)            | 220 V ~   | 79 250 291 |  |

## Replacement contact block


| Part number | Configuration | Function               |
|-------------|---------------|------------------------|
| 83157401    | SPDT          | <STD>                  |
| 83157402    | SPDT          | Break before make      |
| 83157403    | SPDT          | Make before break      |
| 83157404    | 2 NO          | DPST - Normally open   |
| 83157405    | 2 NC          | DPST - Normally closed |

## Other information

For other contact types and accessories or special modes of operation : please consult us.  
For dimensions see page 3/39.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

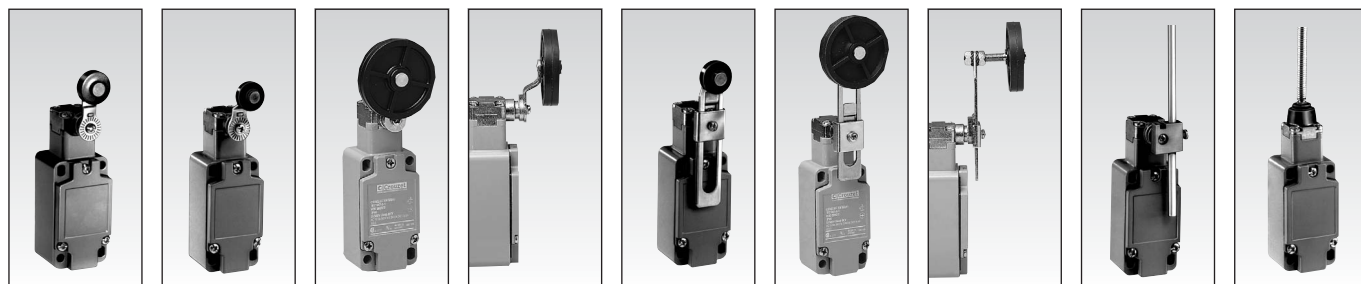


1

| 83 862 311 | 83 862 312 | 83 862 315 | 83 862 316 | 83 862 313 | 83 862 317 | 83 862 318 | 83 862 314 | 83 862 611 |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 83 862 301 | 83 862 302 | 83 862 305 | 83 862 306 | 83 862 303 | 83 862 307 | 83 862 308 | 83 862 304 | 83 862 601 |

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
| • | • | • | • | • | • | • | • | • |
|   |   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |   |
|   |   |   |   |   |   |   |   |   |

|   |  |  |  |   |   |   |   |   |
|---|--|--|--|---|---|---|---|---|
| • |  |  |  | • | • | • | • | • |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |
|   |  |  |  |   |   |   |   |   |



3

|                 |                 |                 |                 |                 |                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 28cmN (40inoz)  | 3 (10.5)        |
| 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 37cmN (52inoz)  | 4.5 (15.8)      |
| 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) | 75cmN (106inoz) |                 |
| 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             | 30°             |
| 60°             | 60°             | 60°             | 60°             | 60°             | 60°             | 60°             | 60°             |                 |
| 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             | 20°             |
| 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             | 75°             |
| 15              | 15              | 15              | 15              | 15              | 15              | 15              | 15              | 15              |
| -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) | -25+80(-13+176) |
| -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) | -40+80(-40+176) |
| IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           | IP 66           |
| 340 (12)        | 340 (12)        | 340 (12)        | 340 (12)        | 365 (12.8)      | 365 (12.8)      | 365 (12.8)      | 360 (12.7)      | 335 (11.8)      |

2

### To order, specify :


|                                       |                                                                                                                |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Standard products</b>              | <b>1</b> Part number<br>Example : Limit switch 83 860 001                                                      |
| <b>Standard products, non stocked</b> | <b>1</b> Type <b>2</b> Accessory<br>Example : Limit switch 83 861 001 - Cover with status indicator 79 250 290 |

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Dimensions of 83 852 / 83 853 EN 50047


83 852 001/011  
83 853 001/011

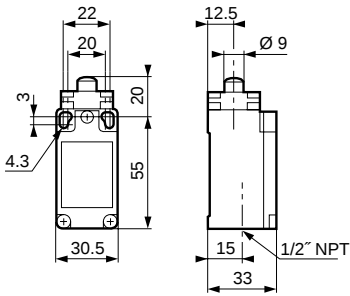


83 852 501/511  
83 853 501/511




83 852 101 - 201/211  
83 853 101 - 201/211

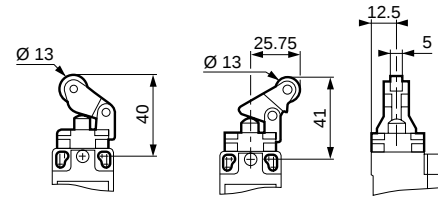


83 852 301/311  
83 853 301/311




83 852 302/312  
83 853 302/312




83 852 305/315  
83 853 305/315

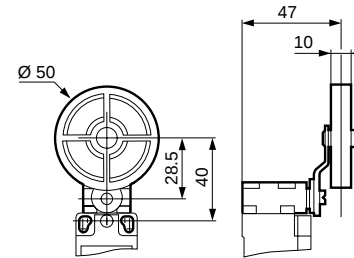


83 852 306/316  
83 853 306/316

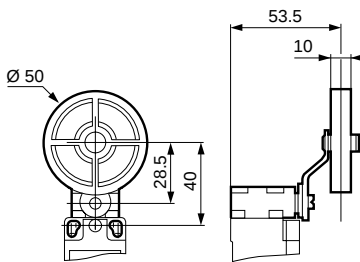


83 852 303/313  
83 853 303/313




83 852 307/317  
83 853 307/317

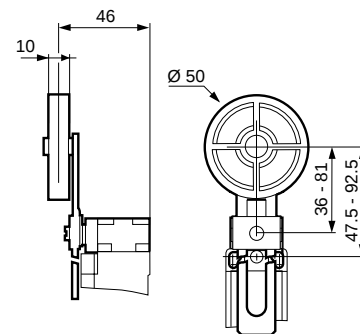


83 852 308/318  
83 853 308/318

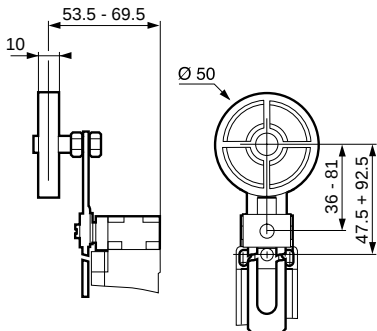

83 852 304/314  
83 853 304/314



83 852 601/611  
83 853 601/611




mm

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Dimensions of 83 862 EN 50041


83 862 001/011




83 862 501/511




83 862 101/111 – 201/211

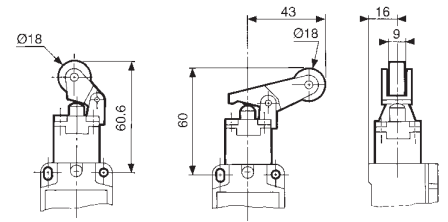


83 862 301/311




83 862 302/312




83 862 305/315

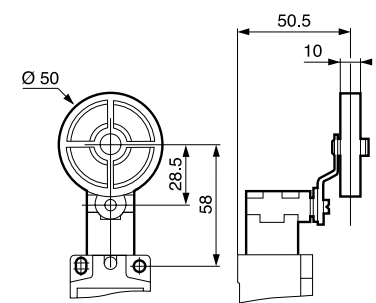


83 862 306/316

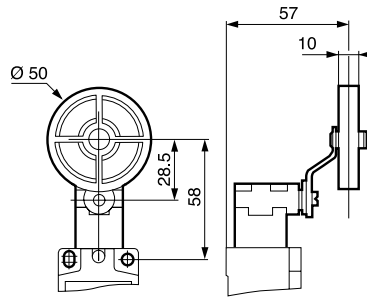


83 862 303/313




83 862 307/317

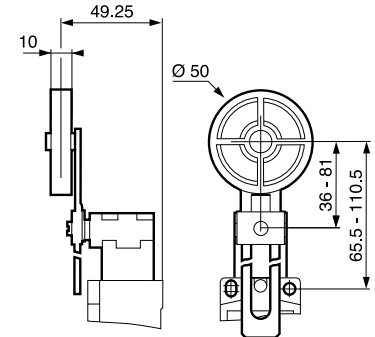


83 862 308/318

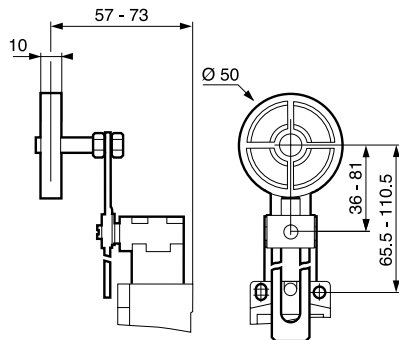

83 862 304/314



83 862 601/611



mm

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Conforms to the following standards:

IEC / EN 60947.5.1  
 Dimensional conformity: NFC 63145  
 Low voltage directive: 73/23/EEC and 93/68/EEC  
 Protection from electric shock: NFC 20030 or IEC 60536 Class 1, degree of pollution 3.

**Temperature specification:** -25°/+70°C -13°/+158°F

## Degree of protection:


IEC 62529: IP 66/67  
 NEMA 250: Type 1, 3, 4, 6, 13

## Function:

Contact block is SPDT with double break contacts (form Zb). The NC contacts are positive opening. The NO and NC contacts are electrically isolated.

## Contact type:

Snap action SPDT-DB

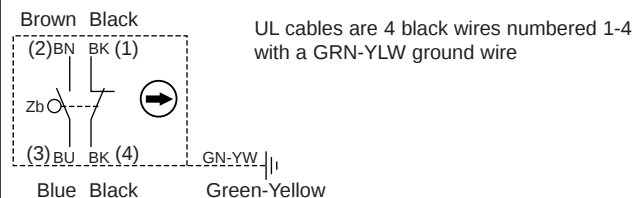

## Electrical characteristics

Assigned impulse voltage (Uimp): 2500 V  
 Assigned insulation voltage (Ui): 500 V  
 Thermal rating (Ith): 10 A  
 With standard contacts: Minimum voltage 10V  
 Minimum current 100mA

## Use categories:

Following IEC 947.5.1 AC15 = 250V / 6A  
 DC13 = 24V / 8A  
 Following UL 508 A300 - Q150

## Electrical protection:

Under IEC 947.5.1  
 Short-circuit protection (SCPD): 6AgC fuse  
 Electrical protection by internal earth ground

## Connections:

Non-UL: 5 conductor cable H05VF 0.75mm² ext. Ø8mm (Black)  
 UL: 5 conductor cable (Grey)

## Approvals:

UL 508, UL 50

## Types

Standard

Roller turned 90°

## Standard products 2.0 meter cable\* side exit\*\*

### Actuator Type

Metal plunger  
 Metal roller plunger  
 Metal plunger with threaded barrel  
 Roller plunger - metal with threaded barrel  
 Metal roller lever (operates in both directions)

### Mechanical characteristics

|                                |                    |
|--------------------------------|--------------------|
| Operating force minimum        | oz. (N)            |
| Total travel force minimum     | oz. (N)            |
| Positive opening force minimum | oz. (N)            |
| Mechanical life                | millions of cycles |
| Weight                         | oz. (grams)        |


## Contact Sequences

Positions given are nominal

## Dimensions

mm

83 870 0

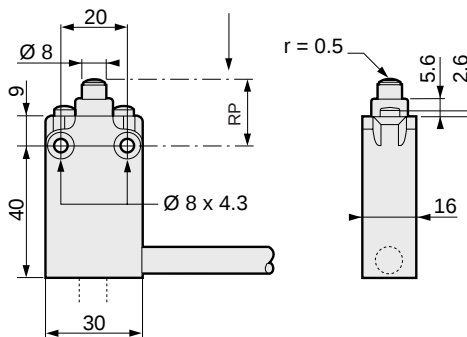

(\*) For other lengths of cables:

modify the last digit of the part number. For example:

- 0 = M12 connector output
- 1 = 1.0 meter cable
- 2 = 2.0 meter cable (Standard)
- 3 = 3.0 meter cable

(\*\*) For different cable outputs:

modify the next to the last digit of the part number.:


- 0 = Cable side exit (Standard)
- 1 = Cable bottom exit
- 2 = Connector side exit
- 3 = Connector bottom exit

## Other information

For different actuator arms, low voltage / low current contacts / low temperature, special contacts, custom wiring harness, etc., please consult us.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

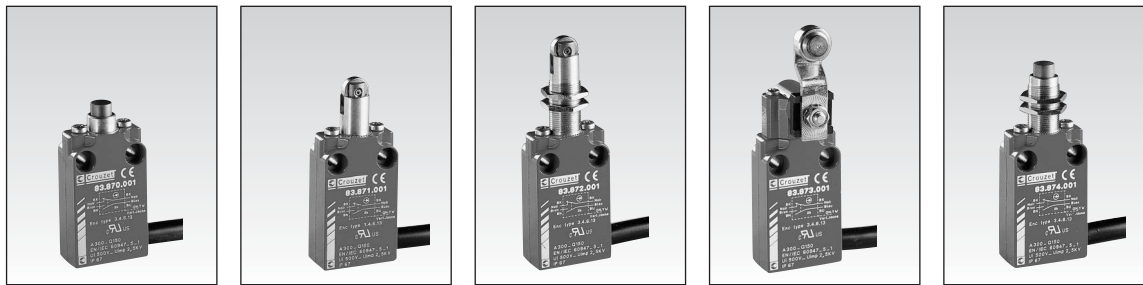


| 83 870 0   | 83 871 0   | 83 872 0   | 83 873 0   | 83 874 0   |
|------------|------------|------------|------------|------------|
|            | 83 875 0   | 83 876 0   |            |            |
| 83 870 102 | 83 871 102 | 83 872 102 | 83 873 102 | 83 874 102 |
| 83 870 103 | 83 871 103 | 83 872 103 | 83 873 103 | 83 874 103 |


|            |            |            |                   |            |
|------------|------------|------------|-------------------|------------|
| 36 (10)    | 36 (10)    | 36 (10)    | 22 in.oz. (15cmN) | 36 (10)    |
| 108 (30)   | 108 (30)   | 108 (30)   | 52 in.oz. (35cmN) | 108 (30)   |
| 100 (28)   | 100 (28)   | 100 (28)   | 22 in.oz. (15cmN) | 100 (28)   |
| 10         | 10         | 10         | 10                | 10         |
| 10.3 (290) | 10.4 (295) | 11.1 (315) | 10.3 (290)        | 10.9 (310) |

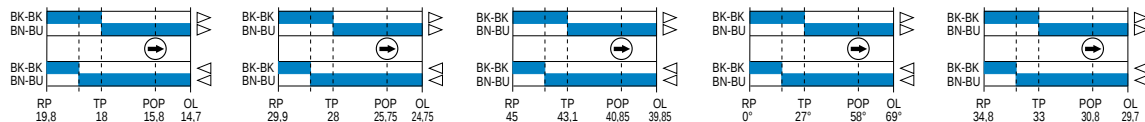


83 871 0




83 872 0




83 873 0




83 874 0



83 875 0



83 876 0



### To order, please specify:



Standard products

2

Part number

Example : Limit switch 83 871 102; Cable length = 2m



Standard products,  
non stocked

1

Type

Examples : Limit switch 83 871 103; cable length = 3 m - Limit switch 83 871 006; cable length = 6 m

Products and specifications subject to change without notice.

## Conforms to the following standards

IEC / EN 60947.5.1  
 Dimensional conformity: NFC 63145  
 Low voltage directive: 73/23/EEC and 93/68/EEC  
 Electric shock protection: NFC 20030 or IEC 60536 class 1, degree of pollution 3.

**Temperature specification:** -25°/+70°C -13°/+158°F

## Degree of protection


According to IEC 62529: IP 66 / 67  
 According to NEMA : Type 1, 3, 4, 6, 13

## Function

Four-terminal double break contact element (form Zb) with positive opening NC contacts. The two moving contacts are electrically isolated from one another.

## Principle

Snap-Action SPDT-DB



## Electrical characteristics

Assigned impulse voltage (Uimp): 2500 V  
 Assigned insulation voltage (Ui): 500 V  
 Thermal rating (Ith): 10 A  
 With standard contacts: Minimum voltage 10 V  
 Minimum current 100 mA

Use category:  
 according to IEC 947.5.1 AC15 = 250 V / 6 A  
 DC 13 = 24 V / 8 A  
 according to UL 508 A300 - Q150

## Electrical protection

Integral earth wire  
 Short-circuit protection device: IEC 947.5.1  
 Fuse 6 AgC

## Connections

5-core cable HO5VF, 75 mm<sup>2</sup>, ext. Ø 8 mm (non-UL type cable)

## Approvals

UL 508, UL 50

## Types

Standard  
 Plunger or roller at 90°

**Standard Part Number (Cable length = 2.0 meters, exit: side)**

## Actuator Type

Metal plunger  
 Metal roller plunger  
 Metal plunger with threaded barrel  
 Roller plunger - metal with threaded barrel  
 Metal roller lever (operates in both directions)

## Mechanical characteristics

Minimum positive opening force N (cmN)  
 Minimum total travel force N (cmN)


Mechanical life millions of operations  
 Weight g

## Sequences

Positions: nominal data

## Dimensions

83 880

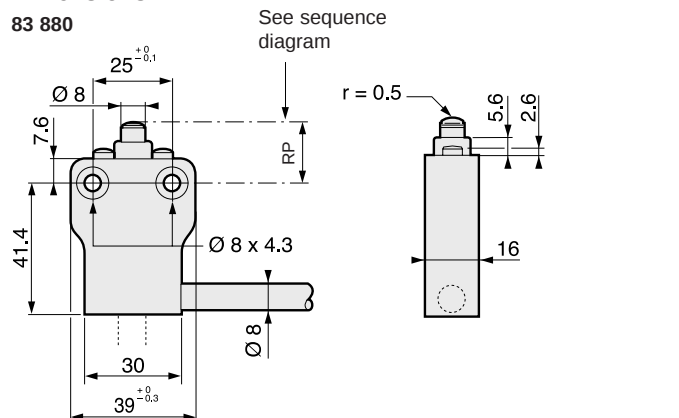

(\*) Other cable lengths:

modify the last digit of the part number. For example:

- 0 = M12 connector output
- 1 = 1.0 meter cable
- 2 = 2.0 meter cable (Standard)
- 3 = 3.0 meter cable
- 6 = 6.0 meter cable

(\*\*) For different cable outputs:

modify the next to the last digit of the part number:


- 0 = Cable side exit (Standard)
- 1 = Cable bottom exit
- 2 = Connector side exit
- 3 = Connector bottom exit

## Other information

For different actuator arms, low voltage / low current contacts / low temperature, special contacts, custom wiring harness, etc...., please consult us.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

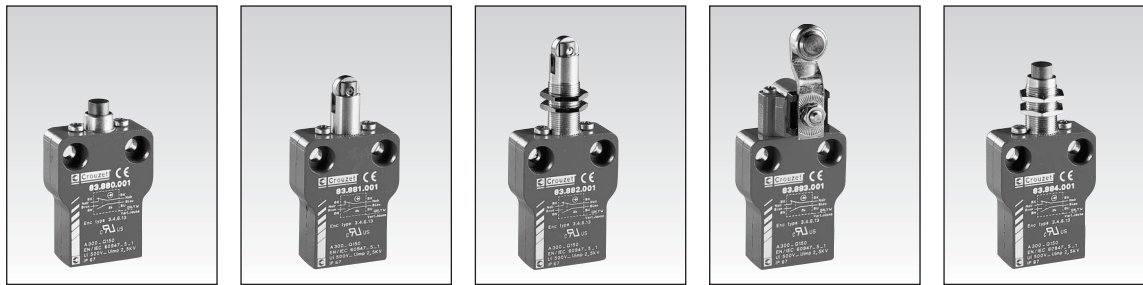


|                   |                   |                   |                   |                   |          |
|-------------------|-------------------|-------------------|-------------------|-------------------|----------|
| <b>83 880 0</b>   | <b>83 881 0</b>   | <b>83 882 0</b>   | <b>83 883 0</b>   | <b>83 884 0</b>   | <b>1</b> |
| <b>83 880 102</b> | <b>83 881 102</b> | <b>83 882 102</b> | <b>83 883 102</b> | <b>83 884 102</b> | <b>2</b> |
| <b>83 880 103</b> | <b>83 881 103</b> | <b>83 882 103</b> | <b>83 883 103</b> | <b>83 884 103</b> |          |

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |

|            |            |            |                   |            |
|------------|------------|------------|-------------------|------------|
| 36 (10)    | 36 (10)    | 36 (10)    | 22 in.oz. (15cmN) | 36 (10)    |
| 108 (30)   | 108 (30)   | 108 (30)   | 52 in.oz. (35cmN) | 108 (30)   |
| 100 (28)   | 100 (28)   | 100 (28)   | 22 in.oz. (15cmN) | 100 (28)   |
| 10         | 10         | 10         | 10                | 10         |
| 10.3 (290) | 10.4 (295) | 11.1 (315) | 10.3 (290)        | 10.9 (310) |

|                |                |                |                |                |
|----------------|----------------|----------------|----------------|----------------|
| BK-BK<br>BN-BU | BK-BK<br>BN-BU | BK-BK<br>BN-BU | BK-BK<br>BN-BU | BK-BK<br>BN-BU |
| RP 18.4        | RP 30.3        | RP 43.6        | RP 0°          | RP 33.4        |
| TP 16.6        | TP 28.4        | TP 41.7        | TP 27°         | TP 31.6        |
| POP 14.4       | POP 26.15      | POP 39.45      | POP 58°        | POP 29.4       |
| OL 13.3        | OL 25.15       | OL 38.45       | OL 69°         | OL 28.3        |

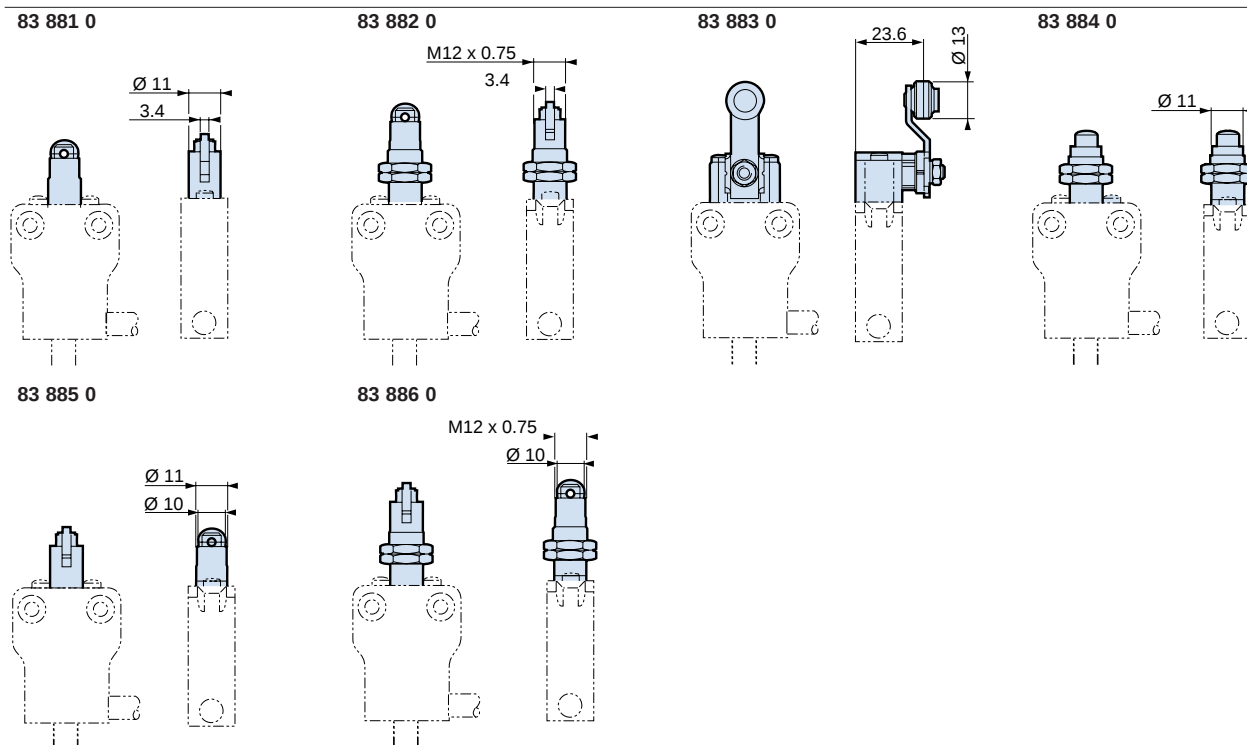

mm

| To order, specify:                    |                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>Standard products</b>              | <b>2</b> Part number<br>Example: Limit switch 83 881 102                                                               |
| <b>Standard products, non stocked</b> | <b>1</b> Type<br>Examples: Limit switch 83 881 003 ; cable length = 3 m - Limit switch 83 881 006 ; cable length = 6 m |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

**Degree of protection :** IP 55 or IP 65 - Nema 4, 12, 13

**Version :** SPDT - double break

**Function :** Four terminal double break contact element (form Za). The contacts must be of the same polarity.

**Layout :**

A - For 83 803



B - Other types




## Electrical characteristics :

Assigned insulation voltage (Ui): 250 V

Current Rating

Assigned working currents (Ie): 5 A

**Operating curve :**

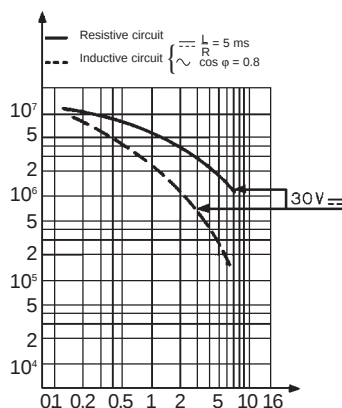

## Connections :

- Plug in : Screw terminals - max. wire section 2.5 mm<sup>2</sup>
- Non Plug in : Solder tags (able to accept 2.8 x 0.5 mm clips).  
Contact Crouzet for part # and availability

## Connection :

For N° 9 sealing gland, 15.2 dia., 1.411 pitch

- 25356113 - metal
- 25356109 - plastic

**Approvals:** UL cUL

## Type

**Plug in version**

## Features

- Top mounted plunger
- Top mounted plunger with threaded barrel
- Top mounted roller plunger with threaded barrel
- Side rotary head - momentary
- Top mounted roller plunger
- Flexible metal spring
- Fiberglass Rod


## Mechanical Characteristics

|                           |            |
|---------------------------|------------|
| Operating force           | N (oz)     |
| Total travel force - min. | N (oz)     |
| Operating Travel - min    | mm (in)    |
| Movement differential     | mm (in)    |
| Total travel - max        | mm (in)    |
| Mechanical life           | operation  |
| Operating temp.           | C° (F°)    |
| Degree of protection      |            |
| Weight                    | grams (oz) |


## Accessories for 83 803 - Sold separately

\* Lever settings or positions dictated by direction in which block is fitted


Adjustable in 6° steps



Adjustable in 90° steps



## Dimensions



mm(in)

## Other information

For other accessories and special contacts, or special modes of operation, please contact factory.  
Low temperature version available.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



| 1                      |                       |                       |                       |                        |                        |                        |
|------------------------|-----------------------|-----------------------|-----------------------|------------------------|------------------------|------------------------|
| 83800151               | 83801051              | 83802051              | 83803051              | 83805051               | 83806051               | 83807051               |
| .                      | .                     | .                     | .                     | .                      | .                      | .                      |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
|                        |                       |                       |                       |                        |                        |                        |
| 10 (35.3)              | 10 (35.3)             | 10 (35.3)             | 7 NcM 10 in.oz.       | 10 (35.3)              | 1.2 (4.23)             | .8 (2.8)               |
| 22 (77.6)              | 22 (77.6)             | 22 (77.6)             | 18 NcM 25 in.oz.      | 22 (77.6)              | 2.5 (8.8)              | 2 (7.05)               |
| 1.5 (.06)              | 1.5 (.06)             | 1.5 (.06)             | 15°                   | 1.5 (.06)              | 8°                     | 8°                     |
| 0.4 (.016)             | 0.4 (.016)            | 0.4 (.016)            | 6°                    | 0.6 (.24)              | 2°                     | 2°                     |
| 5 (.2)                 | 5 (.2)                | 5 (.2)                | 60°                   | 5 (.2)                 | 10°                    | 10°                    |
| 10°                    | 10°                   | 10°                   | 10°                   | 10°                    | 10°                    | 10°                    |
| -10 to 70 (-14 to 158) | -20 to 70 (-4 to 158) | -20 to 70 (-4 to 158) | -20 to 70 (-4 to 158) | -10 to 70 (-14 to 158) | -10 to 70 (-14 to 158) | -10 to 70 (-14 to 158) |
| IP 55                  | IP 55                 | IP 55                 | IP 55                 | IP 65                  | IP 65                  | IP 65                  |
| 50 (1.8)               | 57 (2)                | 57 (2)                | 60 (2.1)              | 50 (1.8)               | 50 (2.65)              | 60 (2.1)               |

## Accessories for 83 803 - Sold separately

Galvanized, passivated steel roller arm. Thermoplastic roller.  
Lever supplied with nut, washer and locating block (loose).\*

### 79 210 997

Bent roller lever R: 1 1/8" (30mm)



### 79 210 998

Straight roller lever R: 1 1/8" (30mm)




### 79 215 332

Adjustable  
Straight roller lever  
1 3/16" → 2 7/8"  
(28 → 72mm)




## Dimensions


### 83 800




### 83 801




### 83 802




### 83 803




### 83 805




### 79 210 997



### 79 210 998




### 79 215 332



### 83 806



### 83 807



mm(in)


To order, specify:

|                                         |                     |
|-----------------------------------------|---------------------|
| Standard products                       | 1 Part number       |
|                                         | Example: 83 800 151 |
| Standard products, non stocked          | 1 Part number       |
|                                         | 2 Accessory         |
| Example: 83 803 0 - Actuator 79 210 997 |                     |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Automotive Limit Switches Series 83 731 / 83 732 / 83 733

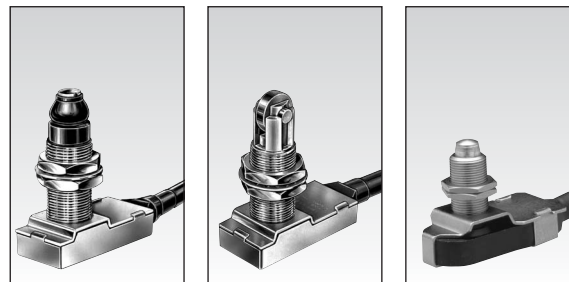

1


**Conform to the following standards :**  
IEC 356.1 - EN 60204.1  
NFC 20030 : Class I - 83 731 - 83 732  
Class III - 83 733

**Degree of protection :**  
IP 56 - IP 66 depending on type

**Version :** 1 pole

**Function :** 3-terminal single break two-way contact element (form C: inverter).


**Principle :**



**Electrical characteristics :**

Assigned operating current (Ie)  
83 731 - 83 732 : 5 A 250 V  
83 733 : 5 A 50 V  
Thermal rating (Ith) : 12 A

**Operating curve :**

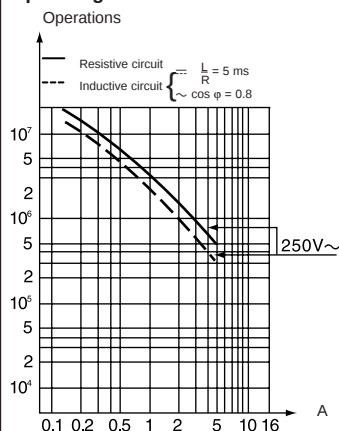

**Connections :**

PVC cable (A05 - VV - F) 0.50 m long  
3 conductors cross-section 0.75 mm<sup>2</sup>  
Sheathed, ext. Ø : 7.6 mm  
Core connections : 1 : black (common)  
2 : brown (NC)  
4 : blue (NO)

**Electrical protection :**

Earthing terminal for version 83 731 and 83 732.

**Approvals :**

CSA A300.


## Types

|                                   |            | 83 731 3        | 83 732 3        | 83 733 3        |
|-----------------------------------|------------|-----------------|-----------------|-----------------|
| <b>Control mechanisms</b>         |            |                 |                 |                 |
| Top-mounted plunger               |            | •               |                 | •               |
| Top-mounted plunger with roller   |            |                 | •               |                 |
| <b>Mechanical characteristics</b> |            |                 |                 |                 |
| Minimum operating force           | N (oz.)    | 15 (53)         | 15 (53)         | 6 (21.2)        |
| Minimum total travel force        | N (oz.)    | 35 (123.4)      | 35 (123.4)      | 25 (88.2)       |
| Minimum operating travel          | mm (in.)   | 2 (.079)        | 2 (.079)        | 1.5 (.059)      |
| Differential travel               | mm (in.)   | 0.2 (.008)      | 0.2 (.008)      | 0.2 (.008)      |
| Max. total travel                 | mm (in.)   | 6 (.236)        | 6 (.236)        | 4 (.157)        |
| Mechanical life                   | Operations | 10 <sup>6</sup> | 10 <sup>6</sup> | 10 <sup>6</sup> |
| Temperature limits                | °C (°F)    | - 5 + 70        | - 5 + 70        | - 5 + 70        |
| Degree of protection              | °C (°F)    | IP 66           | IP 66           | IP 56           |
| Weight                            | g (oz.)    | 110 (3.9)       | 110 (3.9)       | 70 (2.5)        |


**Dimensions**

mm


83 731 3

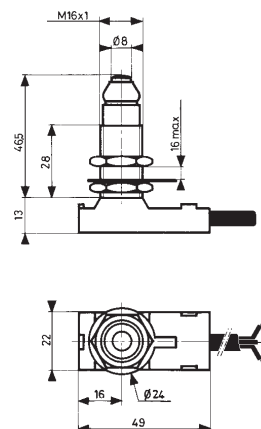

83 732 3



83 733 3

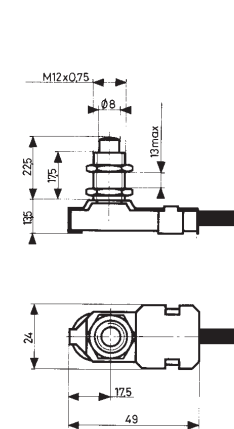

## Other information

For other versions, functions and special contacts or special modes of operation : please consult us.

## To order, specify :

|                        |                      |                      |
|------------------------|----------------------|----------------------|
| <u>1/2 meter cable</u> | <u>1 meter cable</u> | <u>2 meter cable</u> |
| 83731316               | 83731319             | 83731310             |
| 83732323               | 83732315             | 83732327             |
| 83733315               | 83733314             | 83733310             |

Standard products,  
non stocked

1

Type

Example : Limit switch - 83 731 319

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## Conform to the following standards :

IEC 356.1 - NFC 20030 class I : plunger actuated via earthed metal part or an insulating device providing additional insulation.

## Version :

1 pole

## Degree of protection :

IP 66/67 Resistant to hydrocarbons and saline mist (400 hours).

## Function :

Single break two-way contact element  
(Form C : inverter).

## Components :

|           |                          |                           |
|-----------|--------------------------|---------------------------|
| Materials | Casing                   | : thermoplastic polyester |
|           | Plunger                  | : stainless steel         |
|           | Contact                  | : Agcdo - AgNi (gold)     |
|           | Nuts                     | : galvanized steel        |
| Sealing   | Silicon and teflon seals |                           |
|           | PU resin.                |                           |

## Principle :



## Electrical characteristics :

|             |                                                                |
|-------------|----------------------------------------------------------------|
| Standard :  | 8 A 250 V ~ : 30 000 operations                                |
|             | 200 mA 24 V = relay load L/R = 3 ms 10 <sup>7</sup> operations |
| Two-level : | 1 mA 4 V : 10 <sup>7</sup> operations                          |
|             | 200 mA 24 V = relay load L/R =                                 |
|             | 3 ms 5 x 10 <sup>6</sup> operations                            |
|             | 5 A 250 V ~ : 30,000 operations                                |

The two-level type is designed to operate both on two-level (1 mA 4 V minimum) and medium current (5 A maximum) circuits.

However, a given product can only switch a single type of circuit throughout its life.

## Connections :

3 x 0.75 mm<sup>2</sup> PVC cables. 0.50 m long  
Conforms to NFR 13414/13415.

## Core connections :

- 1 = black (common)
- 2 = gray (NC)
- 4 = blue (NO)

## Mounting :

Max. tightening torque : 9 Nm.

## Types

|           |          |
|-----------|----------|
| Standard  | 83 589 0 |
| Two-level | 83 589 8 |

## Control mechanism

|                     |   |   |
|---------------------|---|---|
| Top-mounted plunger | • | • |
|---------------------|---|---|

## Function


|               |   |   |
|---------------|---|---|
| Form C (SPDT) | C | C |
|---------------|---|---|

## Mechanical characteristics

|                            |            |                 |                 |
|----------------------------|------------|-----------------|-----------------|
| Minimum operating force    | N (oz.)    | 10 (35.5)       | 10 (35.5)       |
| Minimum total travel force | N (oz.)    | 15 (53)         | 15 (53)         |
| Minimum operating travel   | mm (in.)   | 2 (0.08)        | 2 (0.08)        |
| Differential travel        | mm (in.)   | 0.1 (.004)      | 0.1 (.004)      |
| Max. total travel          | mm (in.)   | 4.5 (.177)      | 4.5 (.177)      |
| Mechanical life*           | Operations | 10 <sup>7</sup> | 10 <sup>7</sup> |
| Temperature limits         | °C (°F)    | -40+85(-40+185) | -40+85(-40+185) |
| Degree of protection       |            | IP 66 / 67      | IP 66 / 67      |
| Weight                     | g (oz.)    | 80              | 80              |

\* For operating travel of 4 mm.

## Dimensions

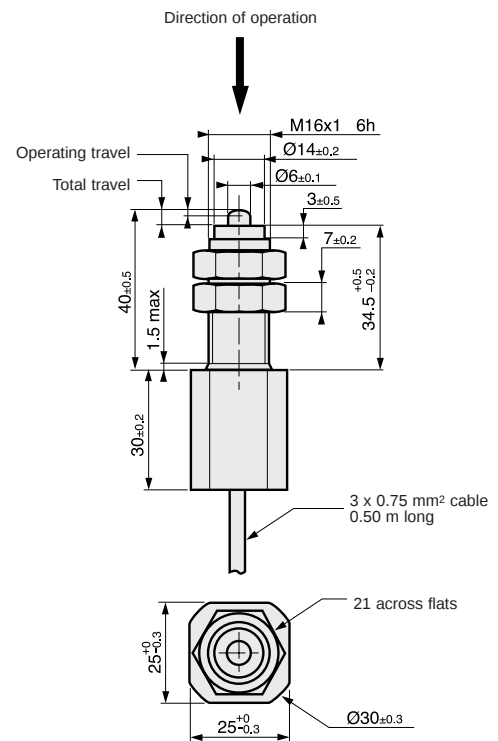

## Other information

For other versions, functions and special contacts or special modes of operation : please consult us.

## To order, specify :

|              |                           |            |                 |
|--------------|---------------------------|------------|-----------------|
| 83589 series |                           |            |                 |
| 1.) Model    | 2.) Contact Configuration | 3.) Output | 4.) Length      |
| 835890       | A (SPNO)                  | W (Wires)  | 0.5 (1/2 meter) |
| 835898       | B (SPNC)                  | C (Cable)  | 1.0 (1 meter)   |
|              | C (SPDT)                  |            | 2.0 (2 meter)   |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Sealed Limit Switches Telescopic-Actuator Series 83 581

**Conforms to the following standards :** NFC 20030 class II -  
NFC 20010

**Degree of protection :** IP 67

**Contact type :** Three terminal single break contact element  
(Form C: SPDT)

**Layout :**



**Electrical characteristics :**

Assigned working currents (Ie): standard 10 A - 250 V~  
low current 0.1 A - 250 V~

**Electrical endurance :**

Standard : 10 A - 250 V : 40 000 operations  
5 A - 250 V : 100 000 operations  
Low current : Designed for use from 1 to 100 mA at 4 to 30 volts.  
In these conditions, the electrical endurance exceeds  
the mechanical life.

**Connections :**

Flexible leads 3x1 mm<sup>2</sup>. Length 0.50 m  
Cable 3x0,75 mm<sup>2</sup>. Length 0.50 m  
Core connections: 1: black  
2: brown  
4: blue

**Versions**

**Features**

Standard \_\_\_\_\_  
Low current \_\_\_\_\_

**Operating devices**

Telescopic top-mounted plunger \_\_\_\_\_  
Plunger with axial roller - standard \_\_\_\_\_

**Plunger roller at 90° (G 90) - Consult Factory**

**Contact Type**

**Form C – SPDT**

**Mechanical characteristics**

|                            |            |
|----------------------------|------------|
| Minimum operating force    | N (oz)     |
| Minimum total travel force | N (oz)     |
| Movement differential      | mm (in)    |
| Minimum operating travel   | mm (in)    |
| Total travel max.          | mm (in)    |
| Mechanical life            | Operations |
| Temperature limits         | °C (°F)    |
| Degree of protection       |            |
| Weight                     | g (oz)     |

**Connections**


|                |                           |       |
|----------------|---------------------------|-------|
| Flexible leads | Lead position - right (D) | _____ |
|                | Lead position - left (G)  | _____ |
| Cable          | Output on left            | _____ |

\* Rating restricted to 8A

**Dimensions**

mm(in)

**83 581 0**

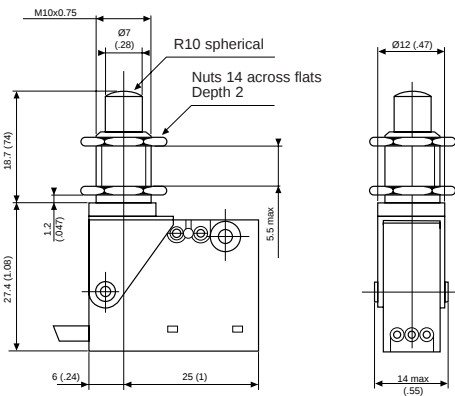

**Other information**

For other accessories and special contacts, or special modes of operation, please consult factory.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



| 83 581 0              |                       | 83 581 1              |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|
| S                     | B                     | S                     | B                     |
| .                     | .                     | .                     | .                     |
| C                     | C                     | C                     | C                     |
| 5 (17.6)              | 5 (17.6)              | 5 (17.6)              | 5 (17.6)              |
| 20 (70.5)             | 20 (70.5)             | 20 (70.5)             | 20 (70.5)             |
| 1 (.04)               | 1 (.04)               | 1 (.04)               | 1 (.04)               |
| 2.5 (.1)              | 2.5 (.1)              | 2.5 (.1)              | 2.5 (.1)              |
| 5.5 (.22)             | 5.5 (.22)             | 5 (.2)                | 5 (.2)                |
| 10 <sup>5</sup>       | 10 <sup>5</sup>       | 10 <sup>5</sup>       | 10 <sup>5</sup>       |
| -20 to 85 (-4 to 185) | -20 to 85 (-4 to 185) | -20 to 85 (-4 to 185) | -20 to 85 (-4 to 185) |
| IP 67                 | IP 67                 | IP 67                 | IP 67                 |
| 40 (1.4)              | 40 (1.4)              | 45 (1.6)              | 45 (1.6)              |
| R                     | R                     | R                     | R                     |
| L                     | L                     | L                     | L                     |
| C*                    | C                     | C*                    | C                     |

#### 83 581 1

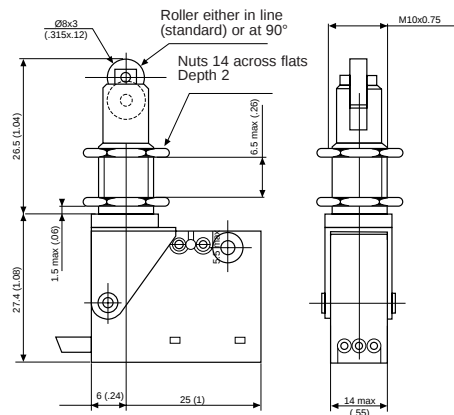

To order, please specify :

|                                          |                                               |                        |                                                                                                           |                                                                      |
|------------------------------------------|-----------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| <b>1</b> Switch Type<br>835810<br>835811 | <b>2</b> Current Level<br>S - 10A<br>B - <.1A | <b>3</b> Contacts<br>C | <b>4</b> Outputs<br>R - Right (flexible wires)<br>L - Left (flexible wires)<br>C - Cable left output only | <b>5</b> Lead Length<br>.5 - 1/2 meter<br>1 - 1 meter<br>2 - 2 meter |
|------------------------------------------|-----------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General Specifications :

### Operation

To defeat the switch  
83 523 - 83 528. Depress the plunger and turn it a quarter of a turn.  
To reset the switch to rest position depress the plunger.

### Components

Bracket  
Zinc plated mild steel  
Plunger  
Stainless steel  
Switch  
83 523, 83 106 0, 83 528, 83 132, 83 133

### Layout

83 523 - 83 528



### Current Ratings

83 523 - 10 Amps  
83 528 - 5 Amps  
Other current ratings are available

**For low current applications, gold contacts are available**

**Approvals:** Please consult us.

## Types

### Features

|                       |            |
|-----------------------|------------|
| Operating force min.  | N (oz)     |
| Movement differential | mm (in)    |
| Total travel max.     | mm (in)    |
| Tripping point min.   | mm (in)    |
| Mechanical life       | Operations |
| Weight                | grams (oz) |
| Operating temperature | °C (°F)    |

### Contact Configuration - SPDT

### Connections

Screw  
Solder (.110 " Quick connect also for 83 528)  
1/14" Quick connects  
3/16" Quick connects

## Other information

 Standard products  
normally stocked  Catalog products,  
produced to order

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




| 83 523 0        |  | 83 523 3        |  | 83 528 0        |  | 83 528 3        |  |
|-----------------|--|-----------------|--|-----------------|--|-----------------|--|
| 1 Pole          |  | 2 Poles         |  | 1 Pole          |  | 2 Poles         |  |
| 30 (105)        |  | 30 (105)        |  | 6 (21.1)        |  | 8 (28.1)        |  |
| 1 (.04)         |  | 1 (.04)         |  | .7 (.027)       |  | .7 (.027)       |  |
| 6 (.24)         |  | 6 (.24)         |  | 6 (.24)         |  | 6 (.24)         |  |
| 4 (.16)         |  | 4 (.16)         |  | 2.5 (.10)       |  | 2.5 (.10)       |  |
| 10 <sup>7</sup> |  | 10 <sup>7</sup> |  | 10 <sup>7</sup> |  | 10 <sup>7</sup> |  |
| 40 (1.41)       |  | 55 (1.94)       |  | 20 (.70)        |  | 23 (.81)        |  |
| C               |  | C               |  | C               |  | C               |  |
| 1               |  | 1               |  | N/A             |  | N/A             |  |
| 2               |  | 2               |  | 2               |  | 2               |  |
| 3               |  | 3               |  | N/A             |  | N/A             |  |
| N/A             |  | N/A             |  | N/A             |  | N/A             |  |

## Dimensions

83 523

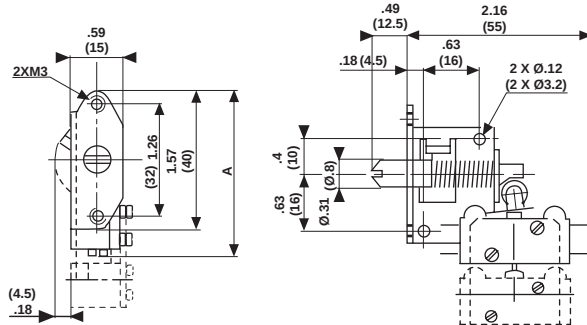

83 528

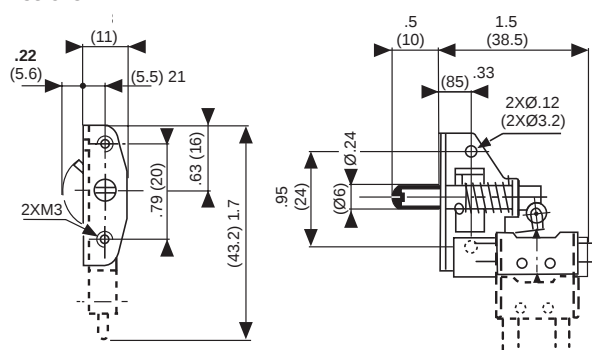

mm (in)

To order, please specify:

Example : 835280 C 2 • DL

### 1 Switch Type

85 523 0  
83 523 3  
83 528 0  
83 528 3

### 2 Configuration

C°

### 3 Connections

1  
2  
3

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Conform to the following standards :


IEC 536-1, IEC 947-5-1, CSA C22.2 N°14  
EN 50047, EN 60204-1, EN 60947-5-1  
NFC 20030 class II for 83 854  
class I for 83 855  
UL 508, VDE 0660/200

**Degree of protection :** IP 66

**Function :** Four-terminal double break contact element (form Zb) with positive opening NC contacts.  
The two moving contacts are electrically isolated from one another.

## Principle :

Dependent action contact (1 NC + 1 NO)  
Break before make



After actuation, the safety contact remains locked open in position "NC". It is unlocked by pressing the reset button.

## Electrical characteristics :

Assigned insulation voltage (Ui) : 500 V  
Thermal rating (Ith) : 10 A  
Use category : A300 - Q300  
AC15 = 6A/250 V - 1.9 A / 380 V  
DC 13 = 3A/24 V

## Short circuit test (under IEC 947.5.1 § 8.3.4)

- Current peak 1000 A at 250 V-0.5 < cos φ < 0.7
- Short circuit protection (SCPD) : fuse 10 A gF
- Electrical protection by internal earth terminal (83 850)

## Connections :

Saddle washer and M 3.5 screw  
Max. wire cross-section : 2 x 1.5 mm² or 1 x 2.5 mm²

## Connection :

For No. 13 sealing gland

## Approvals :

Slow break NC + NO version  
UL / CSA : please consult us.

## Part number

|                                                                       |                                     |
|-----------------------------------------------------------------------|-------------------------------------|
| Thermoplastic case                                                    | Ø 22                                |
| and metal head                                                        | Ø 50                                |
| Metal bodies and                                                      | Ø 22                                |
| actuator heads                                                        | Ø 50                                |
| <b>Special option - configuration EN 50047</b>                        |                                     |
| Control mechanisms - adjustable actuator heads 4 positions 90°        |                                     |
| Steel plunger                                                         |                                     |
| Plunger with steel roller                                             |                                     |
| Lever with                                                            | vertical                            |
| plastic roller                                                        | lateral                             |
| <b>Rotary head, momentary action to right and left <sup>(1)</sup></b> |                                     |
| With lever and                                                        | Ø 19 offset 21 or 53                |
| plastic roller                                                        | Ø 22 offset 33.5 or 40              |
|                                                                       | offset 47                           |
|                                                                       | Ø 50 offset 53.5                    |
| With adjustable                                                       | Ø 22 offset 32.5 or 45              |
| lever and plastic                                                     | offset 46                           |
| roller                                                                | Ø 50 adjustable offset 53.5 to 69.5 |

## Sequence

Dependent action

Positive break operation


## Mechanical characteristics

|                                  |                                 |
|----------------------------------|---------------------------------|
| Minimum operating force          | N - (cmN)                       |
| Minimum total travel force       | N - (cmN)                       |
| Minimum positive operating force | N - (cmN)                       |
| Minimum operating travel         | mm - (°)                        |
| Minimum positive opening travel  | mm - (°)                        |
| Differential travel              | mm - (°)                        |
| Max. total travel                | mm - (°)                        |
| Mechanical life                  | 10 <sup>6</sup> operations min. |
| Temperature limits               | Use ° C                         |
|                                  | Stored ° C                      |
| Degree of protection             |                                 |
| Weight (plastic/metal)           | g                               |


<sup>(1)</sup> Action either right or left according to position of head

## Dimensions


83 856 011 - 83 857 011



83 856 511 - 83 857 511



83 856 311 - 82 857 311



## Other information

## To order, specify :

|                                |
|--------------------------------|
| Standard products              |
| Standard products, non stocked |

1

Part number

Example : Limit switch with manual reset - 83 857 011

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



# Hermetically Sealed Limit Switches

## Hermetically sealed microswitch

Part # 83 151 001  
Without accessories  
(basic cell -55° +150°C)

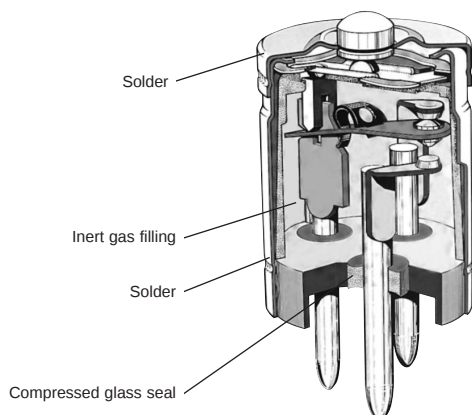

## Characteristics

|                                                             |                              |            |                          |
|-------------------------------------------------------------|------------------------------|------------|--------------------------|
| Min. current                                                | 5 V $\equiv$                 | mA         | 1                        |
| Nominal current                                             |                              |            |                          |
| Resistive                                                   | 48 V $\equiv$ <sup>(1)</sup> | A          | 3                        |
| Lamp                                                        | 115 V - 400 Hz               | A          | 1                        |
| Lamp                                                        | 30 V $\equiv$ <sup>(1)</sup> | A          | 2                        |
| Resistive                                                   | 30 V $\equiv$ <sup>(1)</sup> | A          | 3                        |
| Inductive L/R = 0.005 s                                     | 30 V $\equiv$ <sup>(1)</sup> | A          | 1.5                      |
| Resistive                                                   | 220 V $\sim$                 | A          | 1                        |
| Inductive - cos $\phi$ 0.8                                  | 220 V $\sim$                 | A          | 0.4                      |
| Service life at nominal current <sup>(3)</sup> - operations |                              | min        | 200,000                  |
| Dielectric strength between connections and ground          |                              | V          | 1200                     |
| Rigidity between connections                                |                              | V          | 1000                     |
| Insulation resistance (at 500 Vdc)                          |                              | M $\Omega$ | 100                      |
| Voltage drop at 1 A <sup>(2)</sup>                          |                              | V          | 0.02                     |
| Operating temperature                                       |                              | °C         | -55 +150                 |
| Resistance to shock <sup>(2)</sup>                          |                              | g/ms       | 200/11                   |
| Resistance to vibration <sup>(3)</sup>                      |                              | g/Hz       | 80/20 $\rightarrow$ 2000 |

(1) For a service life of 100,000 operations - Permissible current 4A inductive 7 A resistive for normally open or normally closed.



(2) On soldered connections - For wired connections add 0.1 V per metre.

(3) Value for microswitch without control button

## Connections (consult factory)

Wired (0.38 mm<sup>2</sup> - 0.50 m long)


Soldered



A - Parallel to the axis (//)  
B - Perpendicular to the axis ( $\perp$ )


## Dimensions

Add the dimensions of the various connections for the total dimensions ( $\rightarrow$  indicates the direction of the wires)

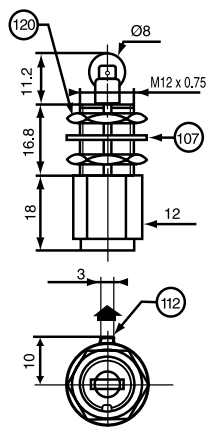

107 - Stop washer - 0.8 thick  
112 - Locating pin - h.2  
120 - Nut h 2.5 - 15 across flat

## Panel cut-out



## Part numbers

|                                 |                     |                   |
|---------------------------------|---------------------|-------------------|
| Wire 0.38 mm <sup>2</sup>       | with parallel wires | <b>83 770 025</b> |
| 0.50 m long                     | perpendicular       | <b>83 770 035</b> |
| With single-pole roller plunger |                     | •                 |

## Characteristics

|                                 |      |                           |
|---------------------------------|------|---------------------------|
| Max operating force             | N    | 12                        |
| Min. release force              | N    | 1.5                       |
| Permitted overtravel force      | N    | 50                        |
| Positive overtravel stop        |      | •                         |
| Max. pre-travel                 | mm   | 0.3                       |
| Max. differential travel        | mm   | 0.05                      |
| Min. overtravel                 | mm   | 3                         |
| Resistance to shocks            | g/ms | 100/11                    |
| Resistance to vibrations        | g/Hz | 50/800 $\rightarrow$ 2000 |
| Weight (without wires)          | g    | 20                        |
| Service life (operations - min) |      | 100,000                   |

## To order, specify :

Standard products,  
non stocked

**1**

Part number

Example : Hermetically sealed limit switch - 83 770 025

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Waterproof Limit Switches Series 83 141

## Standard sensitive microswitch

83 141 002 - (55 °C +150 °C)  
Without accessories



## Connections

Solder tags


## Characteristics

|                                                             |               |    |          |
|-------------------------------------------------------------|---------------|----|----------|
| Nominal current                                             | 10 V $\equiv$ | A  | 0.01     |
| Resistive                                                   | 30 V $\equiv$ | A  | 4        |
|                                                             | 220 V $\sim$  | A  | 1        |
| Inductive L/R = 0.005 s                                     | 30 V $\equiv$ | A  | 2        |
|                                                             | 220 V $\sim$  | A  | 0.5      |
| Service life at nominal current <sup>(1)</sup> - operations |               |    | 100,000  |
| Operating temperature                                       |               | °C | -55 +150 |
| Max. operating force                                        |               | N  | 2        |
| Min. release force                                          |               | N  | 0.4      |
| Max. pre-travel                                             |               | mm | 0.5      |
| Max. differential travel                                    |               | mm | 0.08     |
| Min. overtravel                                             |               | mm | 0.1      |
| Weight                                                      |               | g  | 1        |


<sup>(1)</sup> Value for microswitch without control button

107 - Stop washer width 0.8  
112 - Locating pin  
117 - Free position  
118 - Nuts h. 2.5 - 15 across flat  
120 - Nuts h. 2.5 and 6 - 15 across flat  
121 - Nuts h. 3 and 6 - 21 across flat  
122 - Roller Ø 9.6 - width 3  
130 - Pin h.2


## 83 777 021

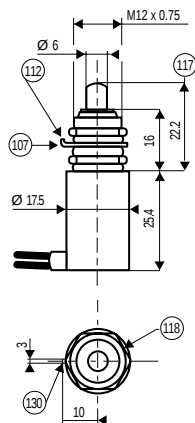


## 83 778 021

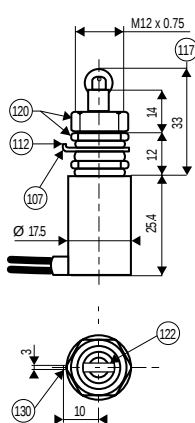

## Panel cut-out

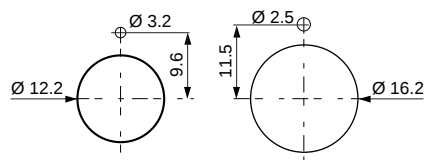

## Dimensions – mm

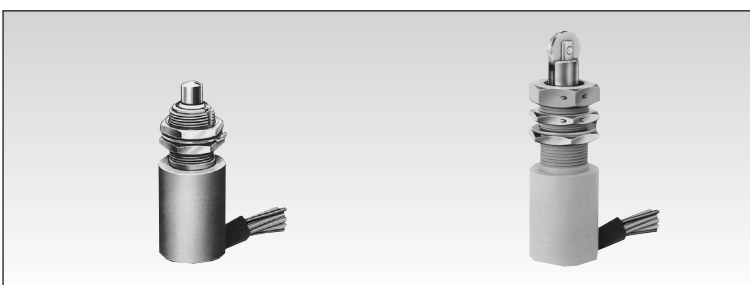

## Part numbers

| 1 pole                          | 83 777 021 | 83 778 021 |
|---------------------------------|------------|------------|
| With plunger                    | •          |            |
| With plunger and roller         |            | •          |
| Output with perpendicular wires | •          | •          |

## Characteristics

|                          |    |     |     |
|--------------------------|----|-----|-----|
| Max. operating force     | N  | 60  | 60  |
| Min. release force       | N  | 10  | 10  |
| Max. total travel force  | N  | 150 | 150 |
| Max. pre-travel          | mm | 1.2 | 1.2 |
| Max. differential travel | mm | 0.2 | 0.2 |
| Min. overtravel          | mm | 3.2 | 3.2 |
| Weight (with wires)      | g  | 30  | 37  |

## General characteristics

|                                                    |               |   |              |
|----------------------------------------------------|---------------|---|--------------|
| Nominal current                                    | 10 V $\equiv$ | A | 0.01         |
| Resistive                                          | 30 V $\equiv$ | A | 4            |
|                                                    | 220 V $\sim$  | A | 1            |
| Inductive L/R = 0.005 s                            | 30 V $\equiv$ | A | 2            |
|                                                    | 220 V $\sim$  | A | 0.5          |
| Service life at nominal current (min. operations)  |               |   | 50,000       |
| Dielectric strength between connections and ground | V             |   | 1500         |
| Dielectric strength between connections            | V             |   | 1000         |
| Insulation resistance (at 500 Vdc)                 | MΩ            |   | 100          |
| Voltage drop at 1 A*                               | V             |   | 0.06         |
| Operating temperature                              | °C            |   | -55 +125     |
| Resistance to shock                                | g/ms          |   | 50/11        |
| Resistance to vibration                            | g/Hz          |   | 10/20 → 2000 |

\* For flying leads, add 0.1 V/metre.

## To order, specify :

Standard products,  
non stocked



Part number

Example : Waterproof limit switch - 83 777 021

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Conforms to the following standards:

EN 50041 - IEC 947.5.1 - VDE 0660/2  
UL 468 - UL 508 - CSA C22.2 No14  
NFC class 1 - EN 418 - Machine Directive 89/392/CEE


## Degree of Protection : IP 66

Function : Four separate terminals with two separate NC switching elements with positive opening contacts. One set works in the cable break mode and the other works in the cable pull mode.


Both elements are electrically isolated from one another.

## Layout :


Cable attached with tension



Cable Pull Mode



Cable Break Mode



## Electrical characteristics :

Assigned insulation voltage (Ui) : 500V  
Thermal rating (Ith) : 10 A  
Use category : A300 - Q300  
AC15 = 6A/250V - 1.9 A/380V  
DC13 = 3A/24V

## Short circuit test (under IEC 947.5.1 sec. 8.3.4)

- Current peak 100 A at 250V  $0.5 < \cos \phi < 0.7$
- Short circuit protection (SCPD) : fuse 10 A gF
- Electrical protection by internal earth ground

## Connections :

Saddle washer and M3.5 screw  
Max. wire cross section : 2 x 1.5 mm<sup>2</sup> or 1 x 2.5 mm<sup>2</sup>

## Connection :


For No 13 or 1/2" NPT sealing gland

## Approvals :

Pending

## Typical Mounting:

The cable is to be tightened until the head is extended with the slot below the E-ring visible. This sets the switch.

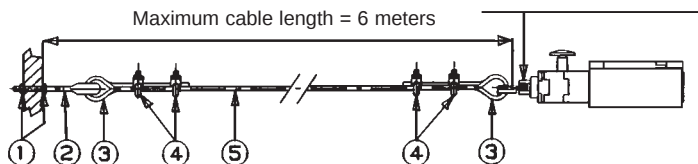

1. Lock Nut
2. Eyelet Bolt
3. Cable through eyelet bolt.
4. Cable clamps
5. Cable - red PVC (red is international color for safety)



## Part Numbers

|              |          |
|--------------|----------|
| Metric No 13 | 83863001 |
| 1/2" NPT     | 83864001 |

## Mechanical Characteristics:


|                            |            |                   |
|----------------------------|------------|-------------------|
| Minimum Operating Force    | cmN        | 85                |
| Minimum Operating Distance | mm         | 4                 |
| Movement Differential      | mm         | 2                 |
| Maximum Total Travel       | mm         | 8                 |
| Mechanical Life            | operations | 3x10 <sup>7</sup> |
| Operating Temperature      | C°         | -25 to +70        |
| Storage Temperature        | C°         | -40 to +70        |

## Mounting Characteristics :

|                         |        |   |
|-------------------------|--------|---|
| Maximum Length of Cable | meters | 6 |
|-------------------------|--------|---|

## Dimensions :

mm

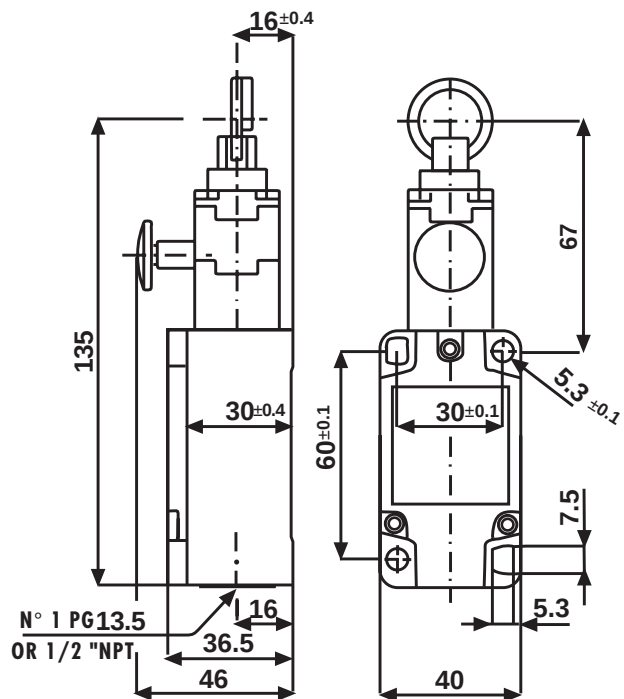


Standard products available in-stock in normal quantities

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

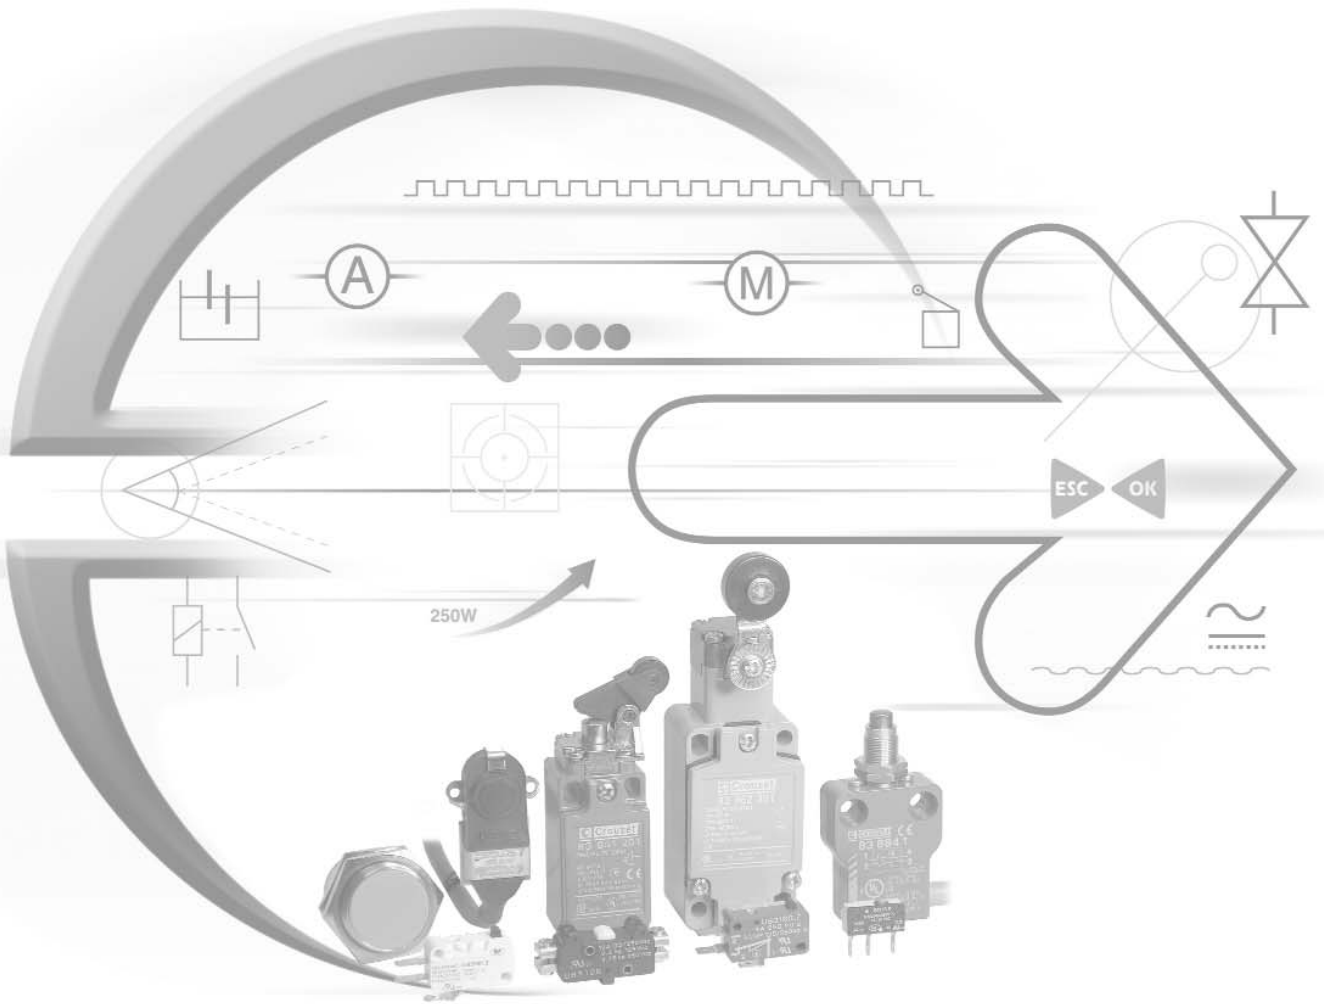

# Safety (Security) Limit Switches



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Miniature Plastic Key Lock Limit Switches Series 83 893 0 / 83 893 1 IP 67

- Key-operated safety interlock switches for monitoring the moving cover
- Plastic bodies and heads
- Heads have 4 possible positions
- Positive opening contacts



## General characteristics

### Environment

|                         |                    |                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------|
| Conforming to standards | Products           | IEC 947-5-1, EN 60 947-5-1, UL 508, CSA C22-2 no.14, JIS C4520 (See P. 2/2 and 2/3) |
|                         | Machine assemblies | IEC 204-1, EN 60 204-1, EN 1088, EN 292                                             |
| Certifications          |                    | UL, CSA                                                                             |
| Protective treatment    |                    | In normal operation: "TC"                                                           |
| Temperature             | Use                | -25°C, +70°C                                                                        |
|                         | Stored             | -40°C, +70°C                                                                        |
| Vibration resistance    |                    | 5 gn (10...500 Hz) according to IEC 68-2-6                                          |
| Shock resistance        |                    | 10 gn (duration 11 ms) according to IEC 28-2-27                                     |
| Degree of protection    |                    | IP 67 according to IEC 529 and IEC 947-5-1                                          |
| Cable entry             |                    | Cable gland 11                                                                      |

### Electrical characteristics

|                                  |                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 A 300 Ue = 240 V, Ie = 3 A or Ue = 120 V, Ie = 6 A<br>DC 13 Q 300 Ue = 250 V, Ie = 0.27 A or Ue = 125 V, Ie = 0.55 A |
| Assigned insulation voltage      | Ui = 500 V according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no. 14                                    |
| Assigned impulse voltage         | Uimp = 6 KV acc. to IEC 947-5-1                                                                                            |
| Thermal rating                   | Ithe = 10 A according to IEC 947-5-1                                                                                       |
| Electric shock protection        | Class 2 according to IEC 536                                                                                               |
| Resistance between terminals     | ≤ 30 mΩ according to IEC 954-5-4                                                                                           |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                                                |
| Connection                       | Screw clamp terminals<br>Clamping capacity min. 1 x 0.5 mm², max. 1.5 mm² with or without ferrule                          |
| Electrical life                  | According to IEC 947-5-1 appendix C                                                                                        |

## Part numbers

### Type of contact

|          |                                                     |                   |
|----------|-----------------------------------------------------|-------------------|
| NC+NO    | 2-pole contact NC+NO break before make, slow action | <b>83 893 001</b> |
| NC+NC    | 2-pole contact NC+NC, slow action                   | <b>83 893 010</b> |
| NC+NO+NO | 3-pole contact NC+NO+NO (2 NO bbm) + slow action    | <b>83 893 120</b> |
| NC+NC+NO | 3-pole contact NC+NC+NO (NO bbm) + slow action      | <b>83 893 130</b> |

### Additional characteristics

|                                           |                               |                               |
|-------------------------------------------|-------------------------------|-------------------------------|
| Maximum actuation speed                   | 0.5 m/s                       | 0.5 m/s                       |
| Minimum actuation speed                   | 0.01 m/s                      | 0.01 m/s                      |
| Resistance to removal of key              | 10 N                          | 10 N                          |
| Mechanical life                           | 1 million operating cycles    | 1 million operating cycles    |
| Maximum operating frequency               | 600 operating cycles per hour | 600 operating cycles per hour |
| Minimum positive opening force            | 15 N                          | 15 N                          |
| Pg 11 cable entry according to NFC 68 300 | 1                             | 2                             |
| Thermal rating (Ith)                      | 10 A                          | 10 A                          |
| Assigned insulation voltage (Ui)          | 500 V                         | 500 V                         |
| Weight                                    | 0.110 kg                      | 0.160 kg                      |

## Accessories

|                                |                                                                                       |                   |
|--------------------------------|---------------------------------------------------------------------------------------|-------------------|
| Straight key                   |  | <b>79 214 581</b> |
| Key with wide fixing bar       |  | <b>79 214 582</b> |
| Short key with wide fixing bar |  | <b>79 214 585</b> |
| Angled key                     |  | <b>79 214 584</b> |
| Flexible key                   |  | <b>79 214 583</b> |

## To order, specify:

### Standard products

**1**

Part number

Example: Safety limit switch 83 893 001 - Straight key 79 214 581

**2**

Accessory

### Standard products, non stocked

**2**

Accessory


Example: Straight key 79 214 581

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

## Dimensions

83 893 0

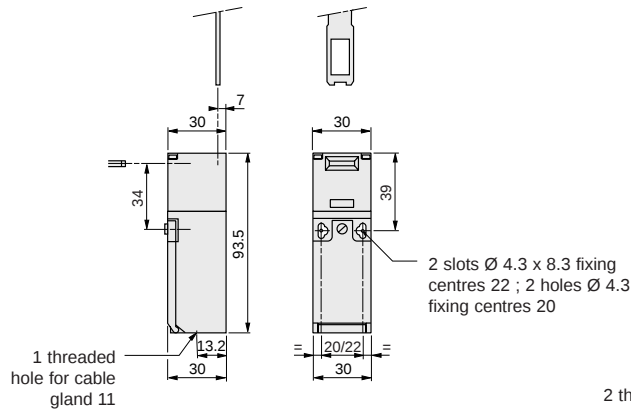

83 839 1

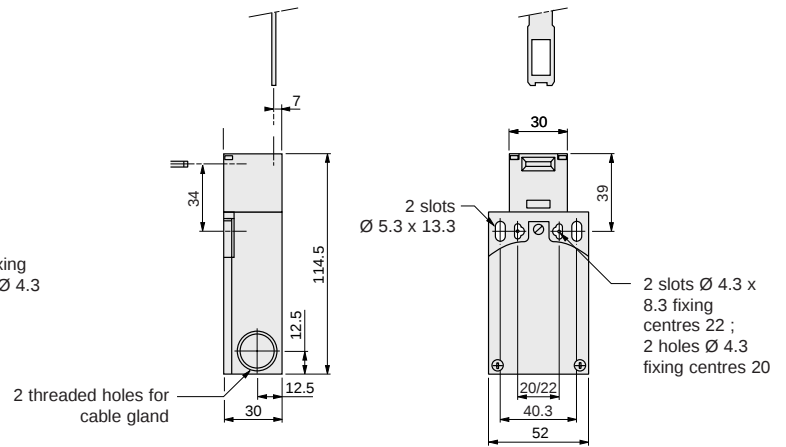


## Accessories

79 214 581

79 214 582 / 585

79 214 584


79 214 583

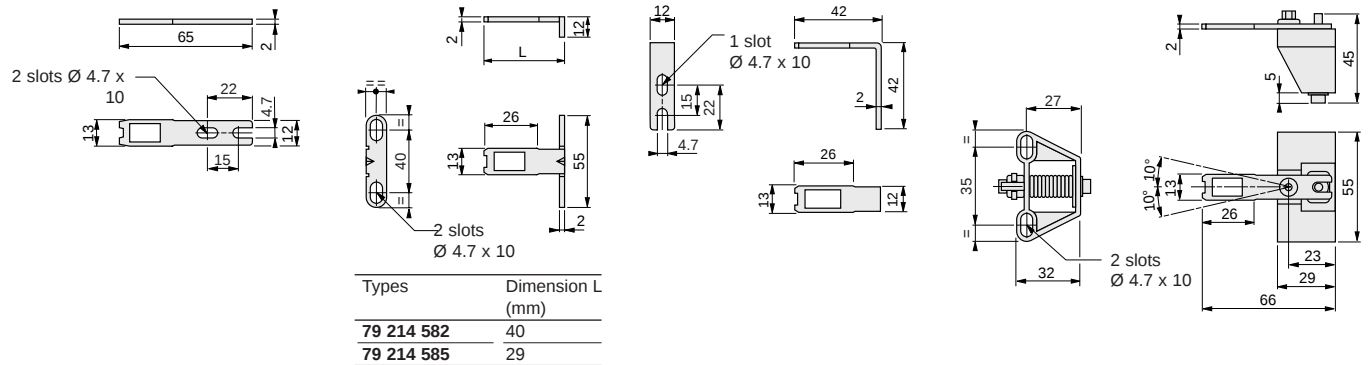



## Operating radius

79 214 581


79 214 582 / 585

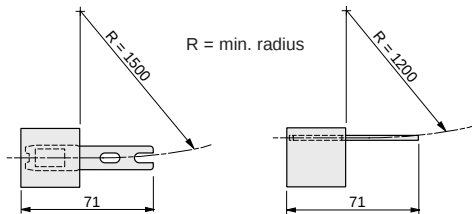

79 214 584

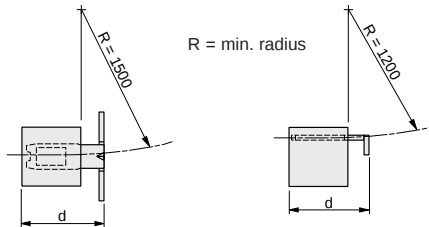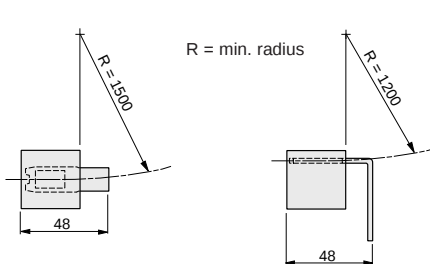

79 214 583

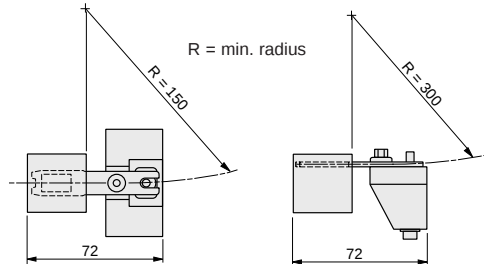

| Types      | Dimension d (mm) |
|------------|------------------|
| 79 214 582 | 46               |
| 79 214 585 | 35               |

## Other information

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Solenoid Operated Plastic Key Lock Limit Switches Series 83 893 2 IP 67

- Monitoring of the moving cover for machines with a stopping time which is greater than the time taken to access the danger zone
- Locked by removing the voltage, unlocked by applying voltage to the electromagnet
- Plastic bodies and heads
- Heads have 4 possible positions
- Positive opening contacts


## General characteristics

### Environment

|                         |                    |                                                                 |
|-------------------------|--------------------|-----------------------------------------------------------------|
| Conforming to standards | Products           | IEC 947-5-1, EN 60 947-5-1, UL 508, CSA C22-2 no. 14, JIS C4520 |
|                         | Machine assemblies | IEC 204-1, EN 60 204-1, EN 1088, EN 292                         |
| Certifications          |                    | UL, CSA                                                         |
| Protective treatment    |                    | In normal operation: "TC"                                       |
| Temperature             | Use                | -25°C, +70°C                                                    |
|                         | Stored             | -40°C, +70°C                                                    |
| Vibration resistance    |                    | 5 gn (10...500 Hz) according to IEC 68-2-6                      |
| Shock resistance        |                    | 10 gn (duration 11 ms) according to IEC 28-2-27                 |
| Degree of protection    |                    | IP 67 according to IEC 529 and IEC 947-5-1                      |
| Cable entry             |                    | One entry per cable gland 11                                    |

### Electrical characteristics

|                                  |                                                                                                                                                                                                                       |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 B300 Ue = 240 V, Ie = 1.5 A or Ue = 120 V, Ie = 3 A<br>DC 13 Q300 Ue = 250 V, Ie = 0.27 A or Ue = 125 V, Ie = 0.55 A<br>Ui = 500 V according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no. 14 |
| Assigned insulation voltage      | Uimp = 4 kV acc. to IEC 947-5-1                                                                                                                                                                                       |
| Assigned impulse voltage         |                                                                                                                                                                                                                       |
| Thermal rating                   | Ithe = 6 A according to IEC 947-5-1                                                                                                                                                                                   |
| Electric shock protection        | Class 2 according to IEC 536                                                                                                                                                                                          |
| Resistance between terminals     | ≤ 30 mΩ according to IEC 954-5-4                                                                                                                                                                                      |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                                                                                                                                           |
| Connection                       | Screw clamp terminals<br>Clamping capacity min. 1 x 0.5 mm², max. 1.5 mm² with or without ferrule                                                                                                                     |
| Electrical life                  | According to IEC 947-5-1 appendix C                                                                                                                                                                                   |



## Part numbers

### Type of contact

|       |                                                     |                   |                   |                   |
|-------|-----------------------------------------------------|-------------------|-------------------|-------------------|
| NC+NO | 2-pole contact NC+NO break before make, slow action | <b>83 893 201</b> | <b>83 893 202</b> | <b>83 893 203</b> |
|-------|-----------------------------------------------------|-------------------|-------------------|-------------------|

### Additional characteristics

|                                              |                               |           |           |
|----------------------------------------------|-------------------------------|-----------|-----------|
| Electromagnet supply voltage (50/60 Hz in ~) | 24 V ~/—                      | 120 V ~/— | 230 V ~/— |
| Maximum actuation speed                      | 0.5 m/s                       |           |           |
| Minimum actuation speed                      | 0.01 m/s                      |           |           |
| Resistance to removal of key                 | 500 N                         |           |           |
| Mechanical life                              | 1 million operating cycles    |           |           |
| Maximum operating frequency                  | 600 operating cycles per hour |           |           |
| Minimum positive opening force               | 15 N                          |           |           |
| Pg 11 cable entry according to NFC 68 300    | 1                             |           |           |
| Weight                                       | 0.360 kg                      |           |           |

## Accessories

|                                |                                                                                       |                   |
|--------------------------------|---------------------------------------------------------------------------------------|-------------------|
| Straight key                   |    | <b>79 214 581</b> |
| Key with wide fixing bar       |  | <b>79 214 582</b> |
| Short key with wide fixing bar |  | <b>79 214 585</b> |
| Angled key                     |  | <b>79 214 584</b> |
| Flexible key                   |  | <b>79 214 583</b> |

## To order, specify:

### Standard products

**1**

Part number

**2**

Accessory

Example: Safety limit switch 83 893 201 - Angled key 79 214 584

### Standard products, non stocked

**1**

Part number

**2**


Accessory

Example: Safety limit switch 83 893 203 - Straight key 79 214 581

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Locking / unlocking using an electromagnet




Type 83 893 2 safety switches are fitted with an electromagnet for locking/unlocking the guard.

With the guard locked, the force required to remove the key is **50 daN**.

In addition to the 2-pole contact element actuated by the key, type 83 893 2 limit switches also have a positive break type **"NC" contact element, actuated by the electromagnet**.

The "NC" contact is integrated in the machine safety circuit.

## Unlocking using a special tool

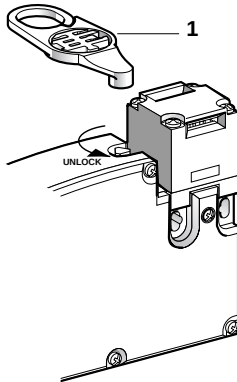

Type 83 893 2 safety switches are supplied with a tool (1) which can be used to unlock the moving guard, bypassing the electromagnet.

Unlocking using a tool is recommended in the following cases:

- machine maintenance (if the tool is in the "UNLOCK" position and then removed, this will prevent the machine from restarting accidentally, therefore ensuring the safety of maintenance personnel),
  - mains failure,
  - problem with unlocking (locking cannot be released: fail-safe condition).
- Unlocking by applying voltage to the electromagnet always takes priority over unlocking using a tool. The "NC" contact is integrated in the machine safety circuit.


## Power supply for the electromagnet on 83 893 2

The electromagnet for type 83 893 2 safety switches is supplied by an electronic circuit which increases its service life. As the 24 V version is protected by a **bridge rectifier**, an A.C. or D.C. supply can be used.

The 120 V and 230 V versions are A.C. only.  
It is also protected against voltage surges.

## Dimensions


83 893 2

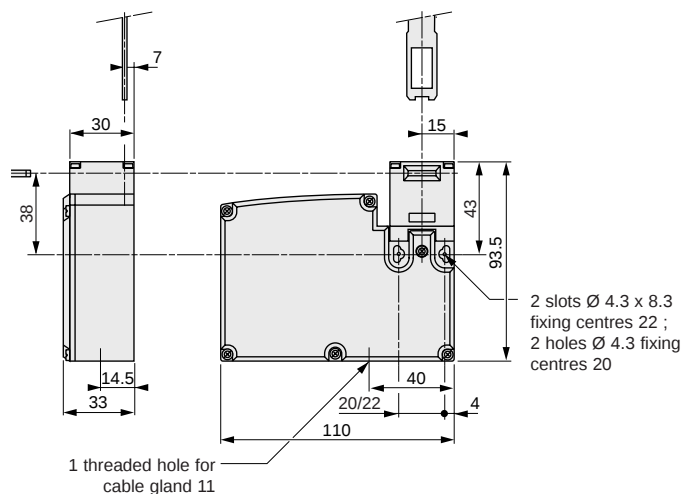

## Category 1 connection according to EN 954-1

Examples of wiring diagrams with a fuse to provide protection against short-circuits in the cable or tampering.

### Locking by removal of voltage 83 893 2

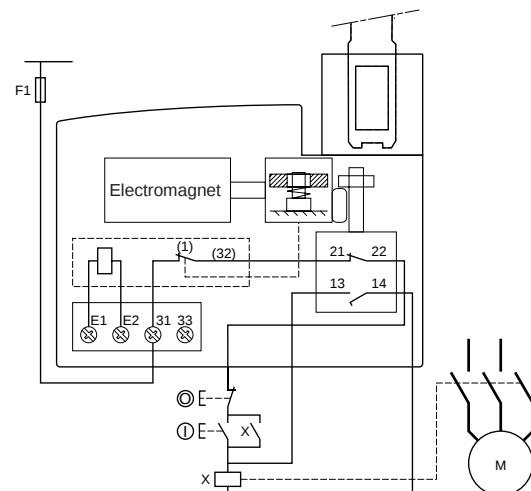

(1) Auxiliary contact  
E1-E2: Power supply for electromagnet  
13-14: Safety contact for redundancy or signalling

## Other information

For accessory dimensions, see page 2/5.

Products and specifications subject to change without notice.

# Industrial Metal Key Lock Limit Switches Series 83 894 0 IP 67

- Spade terminal safety interlock switch for monitoring the moving cover
- Metal bodies and heads
- Heads have 4 possible positions
- Positive opening contacts



## General characteristics

### Environment

|                         |                    |                                                                |
|-------------------------|--------------------|----------------------------------------------------------------|
| Conforming to standards | Products           | IEC 947-5-1, EN 60 947-5-1, UL 508, CSA C22-2 no.14, JIS C4520 |
|                         | Machine assemblies | IEC 204-1, EN 60 204-1, EN 1088, EN 292                        |
| Certifications          |                    | UL, CSA                                                        |
| Protective treatment    |                    | In normal operation: "TC"                                      |
| Temperature             | Use                | -25°C, +70°C                                                   |
|                         | Stored             | -40°C, +70°C                                                   |
| Vibration resistance    |                    | 5 gn (10...500 Hz) according to IEC 68-2-6                     |
| Shock resistance        |                    | 10 gn (duration 11 ms) according to IEC 28-2-27                |
| Degree of protection    |                    | IP 67 according to IEC 529 and IEC 947-5-1                     |
| Cable entry             |                    | One threaded entry for cable gland 13                          |

### Electrical characteristics

|                                  |                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 A 300 Ue = 240 V, Ie = 3 A or Ue = 120 V, Ie = 6 A<br>DC 13 Q 300 Ue = 250 V, Ie = 0.27 A or Ue = 125 V, Ie = 0.55 A |
| Assigned insulation voltage      | Ui = 500 V according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no.14                                     |
| Assigned impulse voltage         | Uimp = 6 kV according to IEC 947-5-1                                                                                       |
| Thermal rating                   | Ithe = 10 A according to IEC 947-5-1                                                                                       |
| Electric shock protection        | Class 2 according to IEC 536                                                                                               |
| Resistance between terminals     | ≤ 30 mΩ according to IEC 954-5-4                                                                                           |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                                                |
| Connection                       | Screw clamp terminals<br>Clamping capacity min. 1 x 0.5 mm², max. 1.5 mm² with or without ferrule                          |
| Electrical life                  | According to IEC 947-5-1 appendix C                                                                                        |

## Part numbers



### Type of contact

|          |                                 |                   |
|----------|---------------------------------|-------------------|
| NC+NO+NO | 3-pole contact                  | <b>83 894 020</b> |
|          | NC+NO+NO (2 NO bbm) slow action |                   |

### Additional characteristics

|                                                                  |                               |
|------------------------------------------------------------------|-------------------------------|
| Maximum actuation speed                                          | 0.5 m/s                       |
| Minimum actuation speed                                          | 0.01 m/s                      |
| Resistance to removal of key                                     | 10 N                          |
| Mechanical life                                                  | > 1 million operating cycles  |
| Maximum operating frequency                                      | 600 operating cycles per hour |
| Minimum positive opening force                                   | 20 N                          |
| Cable entry (DIN Pg 13.5 cable gland 13) according to NFC 68 300 | 1                             |
| Weight                                                           | 0.360 kg                      |

## Accessories

|                          |                                                                                       |                   |
|--------------------------|---------------------------------------------------------------------------------------|-------------------|
| Straight key             |    | <b>79 214 578</b> |
| Key with wide fixing bar |  | <b>79 214 579</b> |
| Flexible key             |  | <b>79 214 580</b> |

## To order, specify:

### Standard products

**1**

Part number

Example: Safety limit switch 83 894 020 - Wide key 79 214 579

**2**

Accessory

### Standard products, non stocked

**2**


Accessory

Example: Flexible key 79 214 580


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


**Dimensions     mm**  
**83 893 0**

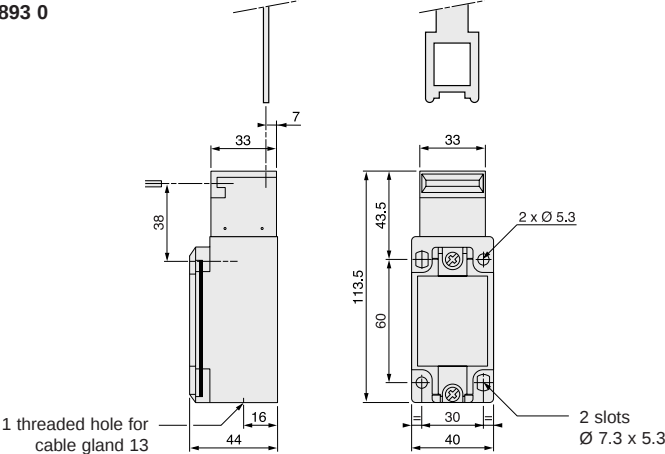


**Accessories**  
**79 214 579**



**79 214 578**





**79 214 580**

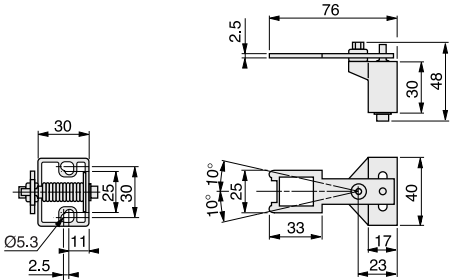


**Operating radius**

**79 214 578     79 214 579**

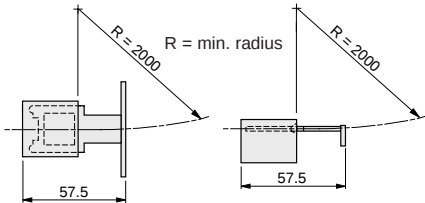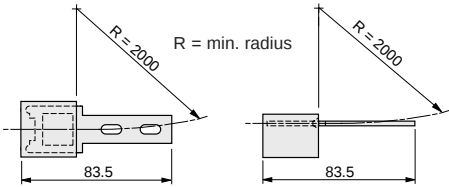

**79 214 580**

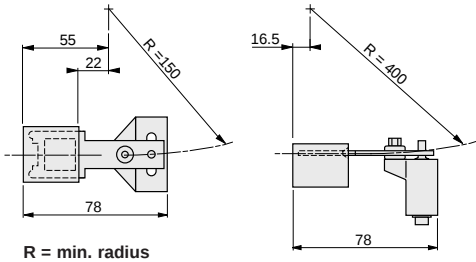


**Other information**

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Solenoid Operated Metal Key Lock Limit Switches Series 83 894 1

- Monitoring of the moving cover for machines with a stopping time which is greater than the time taken to access the danger zone
- Locked by removing the voltage, unlocked by applying voltage to the electromagnet
- Metal bodies and heads
- Heads have 4 possible positions
- Positive opening contacts



## General characteristics


### Environment

|                         |                    |                                                                              |
|-------------------------|--------------------|------------------------------------------------------------------------------|
| Conforming to standards | Products           | IEC 947-5-1, EN 60 947-5-1, UL 508, CSA C22-2 no.14, JIS C4520 (See P. 3/14) |
|                         | Machine assemblies | IEC 204-1, EN 60 204-1, EN 1088, EN 292                                      |
| Certifications          |                    | UL, CSA                                                                      |
| Protective treatment    |                    | In normal operation: "TC"                                                    |
| Temperature             | Use                | -25°C, +70°C                                                                 |
|                         | Stored             | -40°C, +70°C                                                                 |
| Vibration resistance    |                    | 5 gn (10...500 Hz) according to IEC 68-2-6                                   |
| Shock resistance        |                    | 10 gn (duration 11 ms) according to IEC 28-2-27                              |
| Degree of protection    |                    | IP 67 according to IEC 529 and IEC 947-5-1                                   |
| Cable entry             |                    | Threaded entry for cable gland 13                                            |

### Electrical characteristics

|                                  |                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 B300 Ue = 240 V, Ie = 1.5 A or Ue = 120 V, Ie = 3 A<br>DC 13 Q300 Ue = 250 V, Ie = 0.27 A or Ue = 125 V, Ie = 0.55 A |
| Assigned insulation voltage      | Ui = 500 V according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no. 14                                    |
| Assigned impulse voltage         | Uimp = 4 KV according to IEC 947-5-1                                                                                       |
| Thermal rating                   | Ithe = 6 A according to IEC 947-5-1                                                                                        |
| Electric shock protection        | Class 2 according to IEC 536                                                                                               |
| Resistance between terminals     | ≤ 30 mΩ according to IEC 954-5-4                                                                                           |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                                                |
| Connection                       | Screw clamp terminals<br>Clamping capacity min. 1 x 0.5 mm², max. 1.5 mm² with or without ferrule                          |
| Electrical life                  | According to IEC 947-5-1 appendix C                                                                                        |

## Dimensions mm

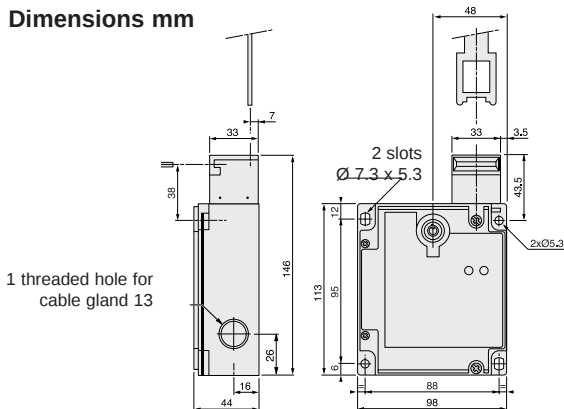

## Part numbers

### Type of contact

|                                                                 |                   |                   |                   |
|-----------------------------------------------------------------|-------------------|-------------------|-------------------|
| NC+NO+NO 3-pole contact<br>NC+NO+NO (2 NO<br>bbm) + slow action | <b>83 894 120</b> | <b>83 894 121</b> | <b>83 894 122</b> |
| NC+NC+NO 3-pole contact<br>NC+NC+NO (NO bbm)<br>slow action     | <b>83 894 130</b> | <b>83 894 131</b> | <b>83 894 132</b> |

### Additional characteristics

|                                                   |                               |             |             |
|---------------------------------------------------|-------------------------------|-------------|-------------|
| Electromagnet supply voltage<br>(50 / 60 Hz in ~) | 24 V ~/---                    | 120 V ~/--- | 230 V ~/--- |
| Maximum actuation speed                           | 0.5 m/s                       |             |             |
| Minimum actuation speed                           | 0.01 m/s                      |             |             |
| Resistance to removal of key                      | 2000 N                        |             |             |
| Mechanical life                                   | > 1 million operating cycles  |             |             |
| Maximum operating frequency                       | 600 operating cycles per hour |             |             |
| Minimum positive opening force                    | 20 N                          |             |             |
| Cable entries Pg 13 according to<br>NFC 68 300    | 2                             |             |             |
| Weight                                            | 1.140 kg                      |             |             |


### Electromagnet characteristics

|                |                              |
|----------------|------------------------------|
| Load factor    | 100%                         |
| Voltage limits | -20% ; +10 %                 |
| Service life   | 20,000 hours                 |
| Consumption    | Inrush 10 VA<br>Sealed 10 VA |

### Indicator characteristics

|                                                         |             |             |             |
|---------------------------------------------------------|-------------|-------------|-------------|
| Assigned insulation voltage<br>according to IEC 947-5-1 | 50 V        | 250 V       | 250 V       |
| Current consumption                                     | 7 mA        | 7 mA        | 7 mA        |
| Assigned working voltage<br>~ or ---                    | 24 V        | 110 / 240 V | 110 / 240 V |
| Voltage limits ~ or --- (including<br>ripple)           | 20...52 V   | 95...264 V  | 95...264 V  |
| Service life                                            | 100,000 hrs | 100,000 hrs | 100,000 hrs |
| Protection against voltage surges                       | yes         | yes         | yes         |

## Accessories

|              |                                                                                       |                   |
|--------------|---------------------------------------------------------------------------------------|-------------------|
| Straight key |  | <b>79 214 578</b> |
| Wide key     |  | <b>79 214 579</b> |
| Flexible key |  | <b>79 214 580</b> |

## To order, specify:

### Standard products

**1**

Part number  
Example: Safety limit switch 83 894 120 - Wide key 79 214 579

**2**

Accessory

### Standard products, non stocked

**1**

Part number  
Example: Safety limit switch 83 894 132 - Straight key 79 214 578


**2**

Accessory

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Locking / unlocking using an electromagnet

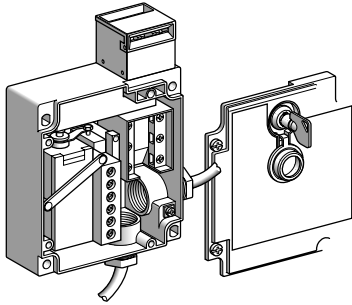


Type 83 894 1 safety switches are fitted with an electromagnet for locking/unlocking the guard.

With the guard locked, the force required to remove the key is **200 daN**.

In addition to the 3-pole contact element actuated by the key, 83 894 1 limit switches also have a positive break type **"NC + NO" contact element, actuated by the electromagnet**. The NC contact is integrated in the machine safety circuit, and the NO contact indicates the position of the electromagnet.

## Locking using a key on 83 894 1



Type 83 894 1 safety switches are supplied with a key-operated lock which can be used to unlock the moving guard, bypassing the electromagnet.

Unlocking using a key-operated lock is recommended in the following cases :

- machine maintenance (if the key is turned to "UNLOCK" and then removed, this will prevent the machine from restarting accidentally, therefore ensuring the safety of maintenance personnel),
- mains failure,
- problem with unlocking (locking cannot be released: fail-safe condition). Unlocking by applying voltage to the electromagnet always takes priority over unlocking using a key-operated lock.

The locking mechanism for standard devices allows the key to be removed in the "LOCK" and "UNLOCK" positions.

## Power supply for the electromagnet on 83 894 1

The electromagnet for type 83 894 1 safety switches runs on D.C. and is therefore particularly reliable.


As it is protected by a **bridge rectifier**, A.C or D.C supplies can be used (24 V, 48 V, 120 V or 230 V). It is also protected against voltage surges.

## Connections

### Category 1 according to EN 954-1

Examples of wiring diagrams with a fuse to provide protection against short-circuits in the cable or tampering.

#### Locking by removal of voltage "NC+NO+NO" 83 894 12 •

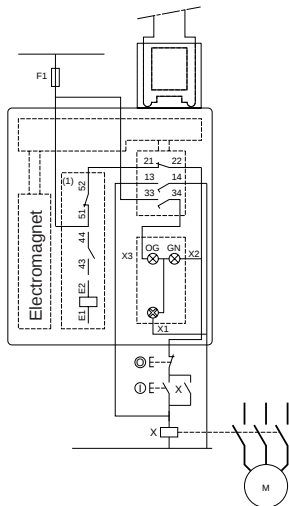


- (1) Auxiliary contact  
E1-E2: Power supply for electromagnet  
43-44: Electromagnet signal contact  
13-14: Safety contact available for redundancy

### Category 3 according to EN 954-1

Examples of wiring diagrams with redundancy of the switch contacts, without monitoring.

#### Locking by removal of voltage "NC+NC+NO" 83 894 13 •

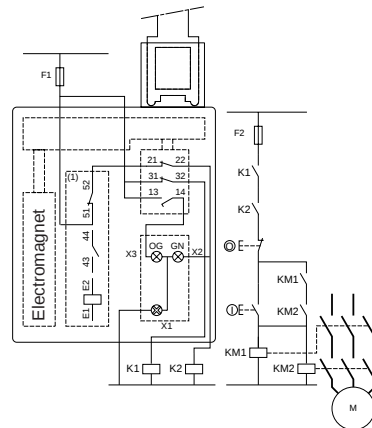

- 33-X1: LED (orange): key not inserted  
51-X1: LED (green): key inserted and locked  
21-52: Safety pre-wiring compulsory

## Other information

For accessory dimensions, see page 2/9.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Hinged Limit Switches Series 83 893 IP 67

- Door hinge safety switches for monitoring the cover, or rotating housing on small machinery
- Plastic bodies and heads
- Stainless steel lever and fixing accessories
- Heads have 4 possible positions
- Positive opening contacts

## General characteristics

### Environment

|                         |                    |                                                                                      |
|-------------------------|--------------------|--------------------------------------------------------------------------------------|
| Conforming to standards | Products           | IEC 947-5-1, EN 60 947-5-1, UL 508, CSA C22-2 no. 14, JIS C4520 (See P. 2/2 and 2/3) |
|                         | Machine assemblies | IEC 204-1, EN 60 204-1, EN 1088, EN 292                                              |
| Certifications          |                    | UL, CSA                                                                              |
| Protective treatment    |                    | In normal operation: "TC" and "TH"                                                   |
| Temperature             | Use                | -25°C, +70°C                                                                         |
|                         | Stored             | -40°C, +70°C                                                                         |
| Vibration resistance    |                    | 25 gn (10...500 Hz) according to IEC 68-2-6                                          |
| Shock resistance        |                    | 11 gn (duration 11 ms) according to IEC 28-2-27                                      |
| Degree of protection    |                    | IP 67 according to IEC 529 and IEC 947-5-1                                           |
| Cable entry             |                    | One threaded entry for cable gland 11                                                |

### Electrical characteristics

|                                  |                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 A 300 Ue = 240 V, Ie = 3 A<br>DC 13 Q 300 Ue = 250 V, Ie = 0.27 A                           |
| Assigned insulation voltage      | Ui = 500 V according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no. 14           |
| Assigned impulse voltage         | Uimp = 6 kV according to IEC 947-5-1                                                              |
| Thermal rating                   | Ithe = 10 A according to IEC 947-5-1                                                              |
| Electric shock protection        | Class 2 according to IEC 536                                                                      |
| Resistance between terminals     | ≤ 30 mΩ according to IEC 954-5-4                                                                  |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                       |
| Connection                       | Screw clamp terminals<br>Clamping capacity min. 1 x 0.5 mm², max. 1.5 mm² with or without ferrule |
| Electrical life                  | According to IEC 947-5-1 appendix C                                                               |
| Minimum actuation speed          | 0.01 m/s                                                                                          |

## Part numbers

### Position of lever

### Type of contact

NC+NO 2-pole contact NC+NO break before make, slow action

### Additional characteristics

|                                          |
|------------------------------------------|
| Tripping angle                           |
| Minimum actuation torque                 |
| Minimum positive opening torque          |
| Mechanical life                          |
| Pg11 cable entry according to NFC 68 300 |
| Weight                                   |


### Operation

Lever movement

83 893 301 / 303

83 893 302

83 893 401






### Operating diagrams

83 893 301 / 303

83 893 302

83 893 401



### Operation of contacts

■ closed

□ open

## To order, specify:

Standard products


1

Part number

Example: Safety limit switch 83 893 302

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

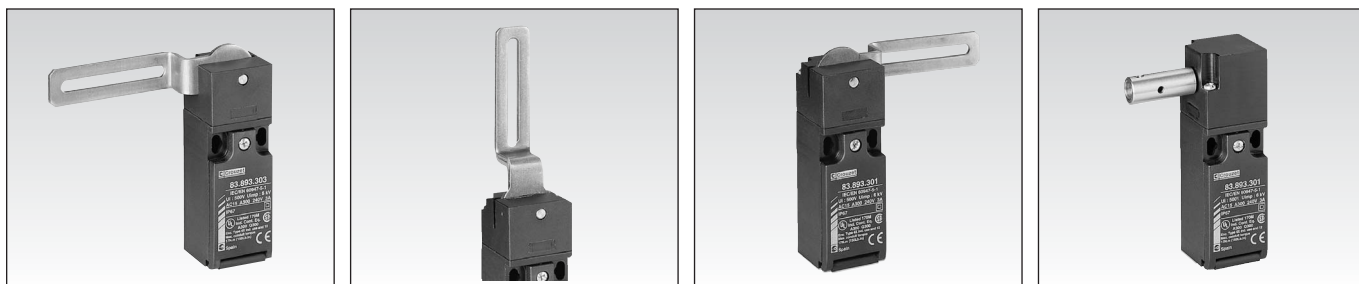


1


| Left                       | Centre                     | Right                      | Length 30 mm               |
|----------------------------|----------------------------|----------------------------|----------------------------|
| <b>83 893 303</b>          | <b>83 893 302</b>          | <b>83 893 301</b>          | <b>83 893 401</b>          |
| 5°                         | 5°                         | 5°                         | 5°                         |
| 0.1 Nm                     | 0.1 Nm                     | 0.1 Nm                     | 0.1 Nm                     |
| 0.25 Nm                    | 0.25 Nm                    | 0.25 Nm                    | 0.25 Nm                    |
| 1 million operating cycles | 1 million operating cycles | 1 million operating cycles | 1 million operating cycles |
| 1                          | 1                          | 1                          | 1                          |
| 0.145 kg                   | 0.145 kg                   | 0.145 kg                   | 0.145 kg                   |

### Dimensions

83 893 3

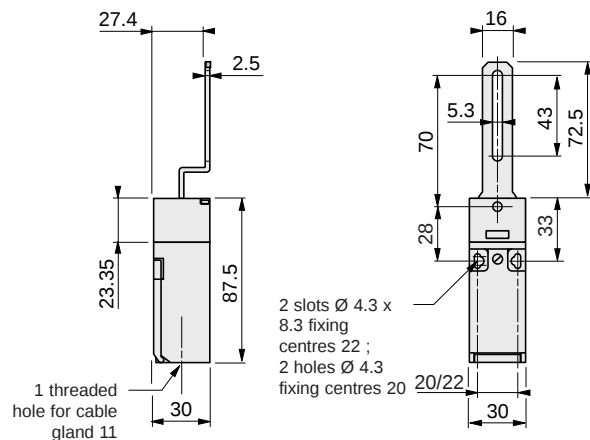

83 893 401

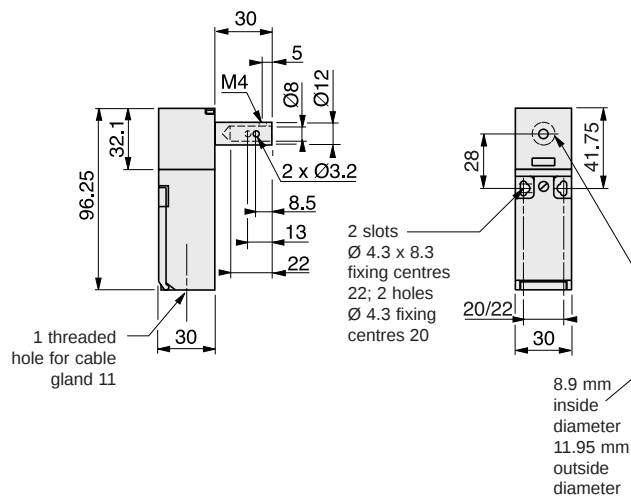

3

### Other information

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Cable Pull Limit Switches Series 83 894 2 IP 67

- “Emergency stop” safety switches are essential in areas or on machinery where a danger exists during operation
- The cable can be used to request an emergency stop at any point in the operating zone
- Applications : conveying, materials handling, machine tools
- Length of the protected zone: up to 15 metres

## General characteristics

### Environment

|                          |                    |                                                                                                  |
|--------------------------|--------------------|--------------------------------------------------------------------------------------------------|
| Conforming to standards  | Products           | IEC 947-5-1, EN 60 947-5-1, VDE 0660-200, EN 418, draft EN 616                                   |
|                          | Machine assemblies | EN 60 204-1, EN 292 machinery directive: 89/392/EEC and 91/368/EEC, social directive: 89/655/EEC |
| Certifications           |                    | UL, CSA                                                                                          |
| Protective treatment     |                    | "TC"                                                                                             |
| Temperature              | Use                | -25°C, +70°C                                                                                     |
|                          | Stored             | -40°C, +70°C                                                                                     |
| Vibration resistance     |                    | 10 gn (10...150 Hz)                                                                              |
| Shock resistance         |                    | 50 gn (duration 11 ms) according to IEC 28-2-27                                                  |
| Degree of protection     |                    | IP 65 according to IEC 529 and IEC 947-5-1                                                       |
| Mechanical life          |                    | 100,000 operating cycles                                                                         |
| Length of protected zone |                    | ≤ 15 m                                                                                           |
| Cable entry              |                    | 3 entries for cable gland with a maximum capacity of 12 mm                                       |

### Electrical characteristics

|                                  |                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------|
| Assigned working characteristics | AC 15 A300 Ue = 240 V, Ie = 3 A<br>DC 13 Q300 Ue = 250 V, Ie = 0.27 A                                         |
| Assigned insulation voltage      | Ui = 500 V degree of pollution 3 according to IEC 947-5-1<br>Ui = 300 V according to UL 508, CSA C22-2 no. 14 |
| Assigned impulse voltage         | Uimp = 6 kV according to IEC 947-5-1                                                                          |
| Thermal rating                   | Ithe = 10 A                                                                                                   |
| Electric shock protection        | Class 1 according to IEC 536 and NF C 20-030                                                                  |
| Resistance between terminals     | ≤ 35 mΩ according to IEC 954-5-4                                                                              |
| Short-circuit protection         | Cartridge fuse 10 A gG (gl)                                                                                   |
| Terminal labelling               | According to CENELEC EN 50013                                                                                 |



## Part numbers

### Type of contact

|       |                    |                   |
|-------|--------------------|-------------------|
| NC+NO | 2-pole contact     | <b>83 894 201</b> |
|       | NC+NO, slow action |                   |

### Additional characteristics


|                                     |                         |
|-------------------------------------|-------------------------|
| Distance between the cable supports | 5 m                     |
| Manual reset                        | Using booted pushbutton |
| Cable anchor                        | Right or left           |
| Weight                              | 0.865 kg                |

### Mounting accessories

|                     |                   |
|---------------------|-------------------|
| Fixed cable support | <b>79 214 571</b> |
|---------------------|-------------------|



### Pulley support



**79 214 577**

### Pulley for cable max. Ø 5 mm



**79 214 576**

### End guards



**79 214 572**

## Mounting kit

|                                     |                   |
|-------------------------------------|-------------------|
| Mounting kit for cable, length 10 m | <b>79 214 573</b> |
| Mounting kit for cable, length 15 m | <b>79 214 574</b> |

Kit comprising: a galvanised cable, Ø 3.2 mm in accordance with the length selected, 1 cable lug, 1 end spring

## To order, specify:

### Standard products

**1**

Part number

**2**

Accessory

**3**

Mounting kit

Example: Safety limit switch 83 894 201 - Pulley 79 214 576 - Kit 79 214 574

### Standard products, non stocked

**2**

Accessory

**3**

Mounting kit


Example: Pulley 79 214 576 - Kit 79 214 574

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Installation

### Description of a typical installation

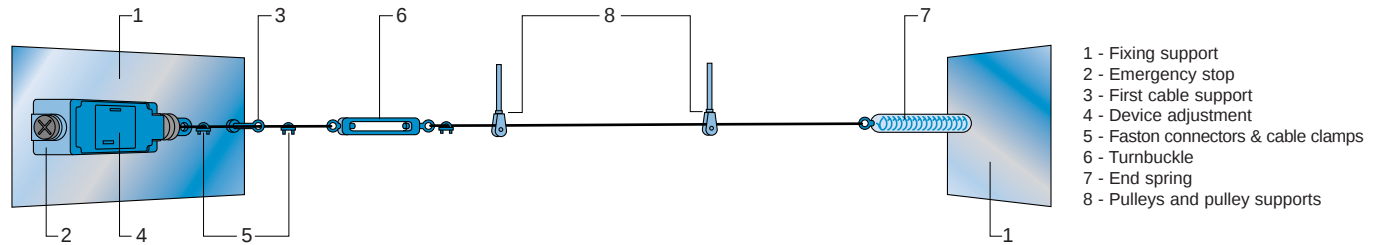


Pulleys must be used if the cable is ever installed with angles (example: perimeter of a machine).

#### Warning:

The sum total of the cable angles must be less than 180°.


## Basic principles

### Positive operation




Device operating

### Latching



Device stopped

### Reset



Device stopped (waiting)

**Positive operation:** The contacts used are positive break type contacts. The device is tripped by positive actuation.


**Latching:** The device is mechanically latched in the tripped position ("NC" safety contacts open). The "NO" contact is only used for signalling.

**Reset:** The devices have a reset button which closes the safety contact. The machine must only be started by deliberately pressing a start-up button, separate from the emergency stop.

## Cable expansion: d

The cable may increase or reduce in length. Variations in length are mainly related to temperature variations on the site of use.

**83 894 201** devices are fitted with cable voltage indicators which can be used to check (and correct if necessary) the voltage at any time.

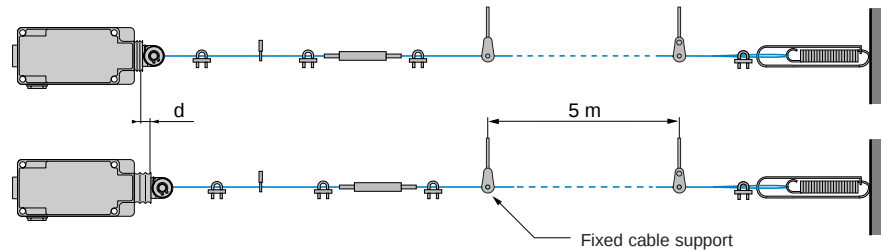


## Actuating force and arrows

This is the value of the force **F1** exerted on the cable, causing the device to trip. **f** is the distance covered by the actuator at the bending point of the cable between the point of equilibrium during operation and the tripping point of the device.

### Operating values:

Average values of the tripping arrows and forces for 5 m fixing centres (standard force):

- Arrow **f**: 160 mm
- Arrow **F1**: 2 daN

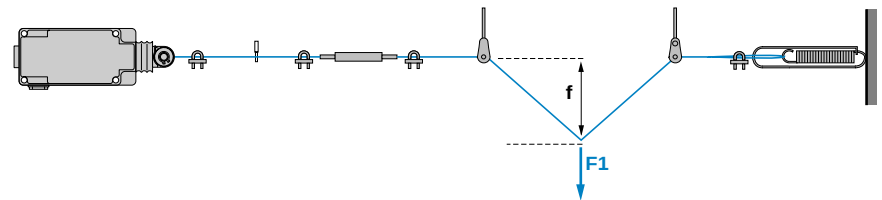

## Standards


**83 894 201** devices meet the requirements of the harmonised European standard **EN 418** on "emergency stop devices". The strongly recommended use of an end spring meets the requirements of the draft European standard **EN 616** on "continuous materials handling systems and equipment".

## Other information

Products and specifications subject to change without notice.

# Plastic or Metal Foot Switches Series 83 895 0 / 83 895 1

- Foot switch for machine tools, wood working machines, rubber and plastics machines, moulding presses
- Plastic foot switch:  
without interlock at rest position
- Metal foot switch:  
with interlock at rest position and protective cover

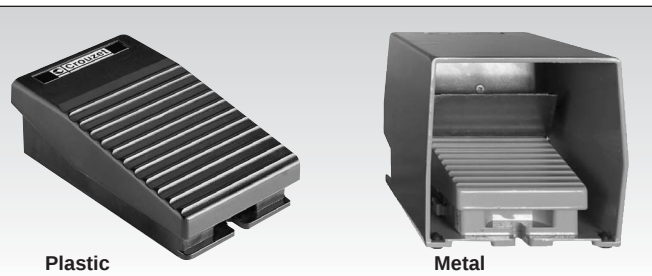

Plastic

Metal

## General characteristics

| Environment             | Plastic                                                                        | Metal                                                                                                                  |
|-------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Conforming to standards | IEC 947-5-1,<br>EN 60 947-5-1,<br>VDE 0660-200,<br>UL 508,<br>CSA C22-2 no. 14 | IEC 947-5-1,<br>EN 60 947-5-1,<br>VDE 0660-200,<br>UL 508,<br>CSA C22-2 no. 14<br>With protective cover:<br>NFE 09-031 |
| Certifications          | FI                                                                             | FI, CSA                                                                                                                |
| Protective treatment    | "TC"                                                                           |                                                                                                                        |
| Temperature             |                                                                                |                                                                                                                        |
| Use                     | -25°C, +70°C                                                                   |                                                                                                                        |
| Stored                  | -40°C, +70°C                                                                   |                                                                                                                        |
| Vibration resistance    | 15 gn (10...150 Hz)                                                            |                                                                                                                        |
| Shock resistance        | 25 gn<br>acc. to IEC 68-2-27                                                   | 20 gn<br>acc. to IEC 68-2-27<br>(150 gn acc. to<br>NF E 09-031)                                                        |
| Degree of protection    | IP 43<br>acc. to IEC 529                                                       | IP 66<br>acc. to IEC 529                                                                                               |
| Mechanical life         | 2 million<br>operations                                                        | 5 million<br>operations                                                                                                |
| Cable entry             | 2 untapped<br>holes for cable<br>gland                                         | 2 threaded<br>holes for cable<br>gland                                                                                 |

## Electrical characteristics

|                                  |                                                                                                                      |                                                |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Assigned working characteristics | AC 15 A300 Ue = 240 V, Ie = 3 A<br>DC 13 Q300 Ue = 250 V, Ie = 0.27 A                                                |                                                |
| Assigned insulation voltage      | Ui = 500 V, degree of pollution 3<br>according to IEC 947-5-1<br>Ui = 300 V according to UL 508,<br>CSA C22-2 no. 14 |                                                |
| Assigned impulse voltage         | Uimp = 6 kV according to<br>IEC 947-5-1                                                                              |                                                |
| Electric shock protection        | Class 2<br>acc. to IEC 536<br>and NF C 20-030                                                                        | Class 1,<br>acc. to IEC 536<br>and NF C 20-030 |
| Resistance between terminals     | 030                                                                                                                  |                                                |
| Short-circuit protection         | ≤ 25 mΩ according to IEC 954-5-4<br>Cartridge fuse 10 A gG (gl)                                                      |                                                |

## Part numbers

| Type of contact | 83 895 001 | 83 895 030 | 83 895 101 |
|-----------------|------------|------------|------------|
| 1 "NC+NO"       |            |            |            |
| 2 "NC+NO"       |            |            |            |
| 1 "NC+NO"       |            |            |            |
| Plastic         | ●          | ●          |            |
| Metal           |            |            | ●          |

## Additional characteristics

|                               |          |          |          |
|-------------------------------|----------|----------|----------|
| Operating principle           | 1 step   | 2 steps  | 1 step   |
| Operating frequency (maximum) | 600 / hr | 600 / hr | 600 / hr |
| Weight                        | 0.275 kg | 0.295 kg | 2.570 kg |

## To order, specify:

|                                                                                                                       |                                                                 |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  Standard products                 | <b>1</b> Part number<br>Example: Plastic foot switch 83 895 001 |
|  Standard products,<br>non stocked | <b>1</b> Part number<br>Example: Metal foot switch 83 895 101   |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


## Presentation

**83 895 0** and **83 895 101** foot switches are an ideal solution for controlling starting and stopping of numerous industrial machines with many different operating modes: pulsed, step-by-step, continuous.

The range comprises metal foot switches (for heavy loads where there is an increased risk) for heavy duty requirements, and plastic foot switches (for lighter loads where there is a reduced risk).



Fitted with a **protective cover**, metal foot switch **83 895 101** should be used whenever a start/stop command could pose a danger (**increased risk**).



**83 895 0** foot switches **without covers** are suitable for start commands which pose a **reduced risk** and for machine stop commands.

## Terminology

### Positive break operation

A device meets the requirements of this specification when all its normally closed contact elements can be safely set to their opening position.

All **foot switches** fitted with a snap action "NC+NO" contact element are positive break type and meet all the requirements of standard IEC 947-5-1, section 3.

### Snap action contact

The linear speed of the moving contacts is independent of the speed of the control device. This feature enables high levels of electrical performance, even with low control device linear speeds.

## Safety contacts

**Devices with snap action positive break type contacts.**

Metal foot switches can have one or two "NC + NO" contact blocks. These foot switches are in positive operation when released: positive actuation is required to maintain the machine in rest mode or cause it to stop (machine stop).

## 2-step pedals


Pedals with two steps are ideal for machines with two operating speeds.

Examples:

- first speed: slow (used for tool adjustment or maintenance),
- second speed: fast (used for normal machine operation).


The first step, connected to an "NC + NO" contact, is achieved by briefly applying gentle pressure to the foot switch (6 mm and 2 daN depression).

The second step, connected to a second "NC + NO" contact, is achieved by applying maximum pressure to the foot switch (12 mm and 9 daN for depression up to the end stop).



## Dimensions


**83 895 101** with protective cover

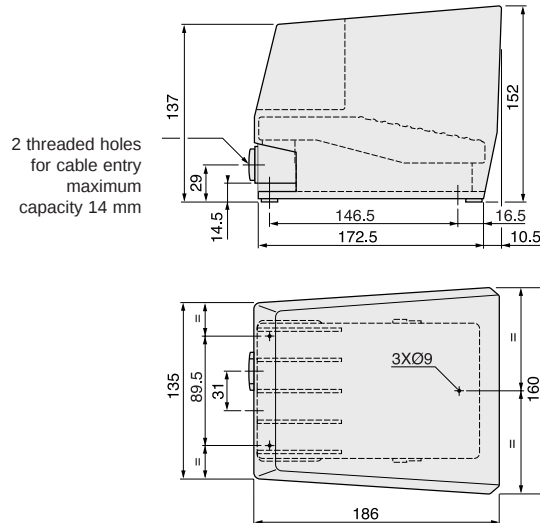

2 threaded holes for cable entry maximum capacity 14 mm

**83 895 0**

1 untapped hole for cable entry maximum capacity 12 mm  
1 untapped hole for cable entry maximum capacity 8 mm

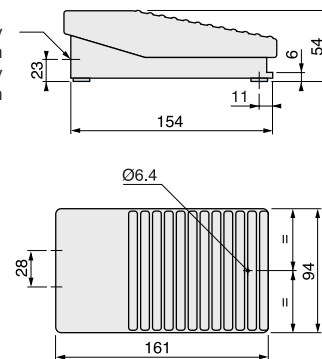

## Other information

Products and specifications subject to change without notice.

# Emergency Stop Switches Series 79 697

- Ø 22 control unit with mechanical latch
- "CE" conforming product
- Positive opening contacts
- Pushbutton with positive mechanical action acc. to EN 418

## Technical characteristics of contacts

|                                   |                                                                          |                      |
|-----------------------------------|--------------------------------------------------------------------------|----------------------|
| Safety component                  | Positive opening contacts                                                |                      |
| Certification                     | UL, CSA                                                                  |                      |
| Mechanical life                   | 3 x 10 <sup>6</sup> operations                                           |                      |
| Electrical life                   | Operating category AC21 230 V/50 - 60Hz conforms to IEC 947-3            |                      |
|                                   | Working current                                                          | Number of operations |
|                                   | (A)                                                                      | (x 10 <sup>6</sup> ) |
|                                   | 14                                                                       | 0.2                  |
|                                   | 10                                                                       | 0.5                  |
|                                   | 6                                                                        | 1                    |
|                                   | 2                                                                        | 3                    |
| Insulation voltage                | Degree of pollution 3-690 V conforms to UTE, VDE, IEC for flush-mounting |                      |
| Voltage for withstanding shocks   | U impulse: 6 kV                                                          |                      |
| Electrical performance            | <b>A.C.</b>                                                              | Working current      |
|                                   | Working voltage (50 -60 Hz)                                              | (IEC 947-3)          |
|                                   | Ue (V)                                                                   | AC15                 |
|                                   | 230                                                                      | 14                   |
|                                   | 400                                                                      | 12                   |
|                                   | 440                                                                      | 11                   |
|                                   | 500                                                                      | 10                   |
|                                   | 690                                                                      | 6                    |
|                                   | <b>D.C.</b>                                                              | Working current      |
|                                   | Working voltage                                                          | (IEC 947-5-1)        |
|                                   | Ue (V)                                                                   | DC13                 |
|                                   | 24 V                                                                     | 1.5 A                |
|                                   | 48 V                                                                     | 1 A                  |
|                                   | 60 V                                                                     | 0.7 A                |
|                                   | 110 V                                                                    | 0.3 A                |
|                                   | 220 V                                                                    | 0.2 A                |
| Protection against short-circuits | HPC fuse 10 A gl - gG conforms to IEC 269                                |                      |
| Temperature limits                | Use                                                                      | - 30 to + 60 °C      |
|                                   | Storage                                                                  | - 50 to + 80 °C      |
| Terminal capacity                 | 2 x 2.5 mm <sup>2</sup> with cable ends                                  |                      |
| Connection                        | Via captive screw terminals                                              |                      |
| Protection indices                | Pushbutton                                                               | IP 65                |
|                                   | Box                                                                      | IP 657               |
|                                   | double insulation                                                        |                      |




## Type

## Mushroom head

### Part numbers

|                                             |            |
|---------------------------------------------|------------|
| 1 "N/C" contact                             | 79 697 003 |
| 1 "N/O" contact                             | 79 697 004 |
| Contact mounting bracket                    | 79 697 005 |
| Metal label, diameter 80, yellow            | 79 697 006 |
| Push-pull head with 2 stable positions      | 79 697 008 |
| Push-turn head with 2 stable positions      | 79 697 009 |
| Locking head with key (supplied)            | 79 697 010 |
| Mushroom head D = 70 black 1 "N/C + 1 "N/O" | 79 697 101 |
| Mushroom head D = 70 black                  | 79 697 011 |

### Symbol




## Conformity

|                                                                         |   |
|-------------------------------------------------------------------------|---|
| European "Machinery" Directive 89/392/EEC                               | • |
| French Decrees 92/765-766-767-768                                       | • |
| European "Usage" Directive 89/655/EEC                                   | • |
| French Decrees 93-40 and 93-41                                          | • |
| European standard NF EN 60204-1 (Machine safety - Electrical equipment) | • |
| European standards NF EN 292-1 and 2 (Machine safety - Basic concepts)  | • |
| European standard NF EN 418 (Machine safety - Emergency stop devices)   | • |

## Dimensions

## Cut-outs for consoles and cabinets

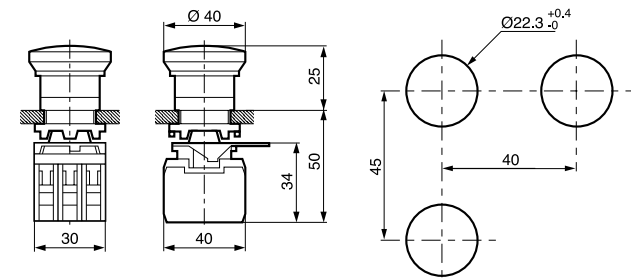

## To order, specify:

Standard products

**1** Part number

Example: Emergency stop pushbuttons for safety applications 79 697 003


Standard products, non stocked

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Two-Hand Control Console Series 85 100

- Used in conjunction with a "KZH3" safety start module for two-hand control applications: folding, clipping, punching, rail-cutting, bending, drilling, presses, etc.
- Supplied with an emergency stop button and 2 spring-return mushroom head pushbuttons.
- Conforms to EN 574 concerning safety applications



## Part numbers


|                                              |            |
|----------------------------------------------|------------|
| KSP2 two-hand control console (metal case)   | 85 100 291 |
| KSP2 two-hand control console (plastic case) | 85 100 293 |
| KSP console fixing foot                      | 85 100 292 |

## Can be ordered separately


|                           |                                                       |            |
|---------------------------|-------------------------------------------------------|------------|
| Mushroom head             | Push-pull 2 "N/C" + 1 "N/O"                           | 79 697 001 |
| Emergency stop            | (red pushbutton + contacts + Ø 80 metal yellow label) |            |
| Spring-return pushbuttons | Mushroom head Ø 70 black 1 "N/C" + 1 "N/O"            | 79 697 101 |

## Dimensions


85 100 293

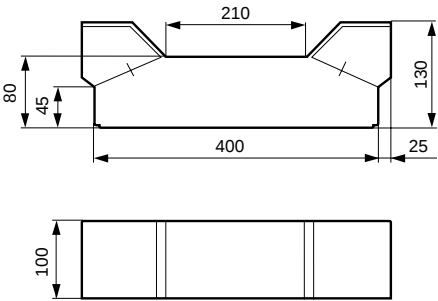

85 100 292

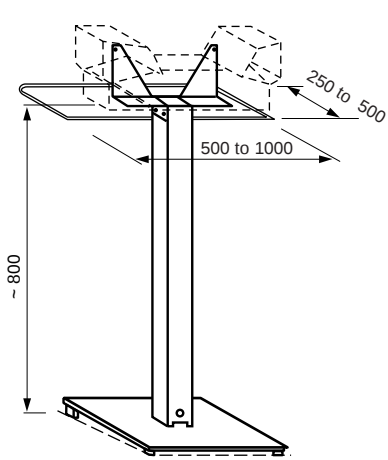

79 697 101

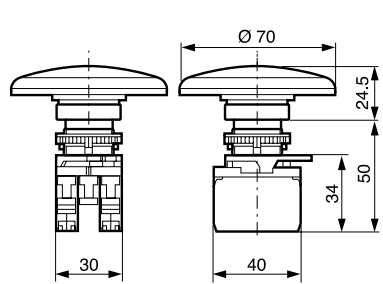

## To order, specify:

Standard products

1

Part number

Example: 2-hand control console - 85 100 293


Standard products,  
non stocked

Products and specifications subject to change without notice.



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

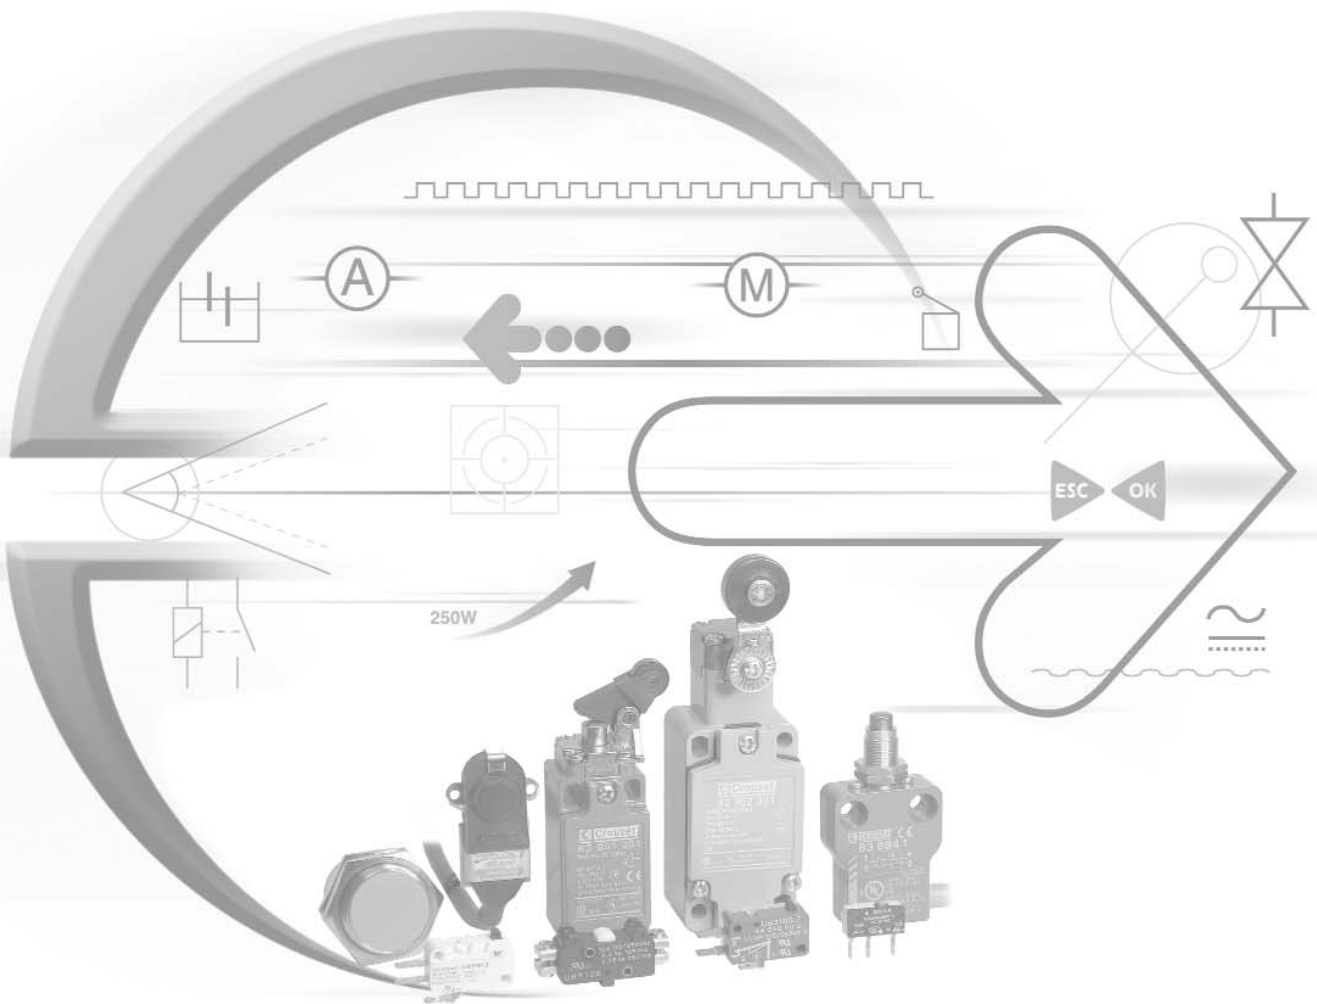

# Proximity Sensors



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

Analog Inductive Proximity Detectors

The analog sensors offer an output voltage variation which is linear and proportional to the distance of the object being detected. The output voltage will be reduced as the object approaches the sensor.




|                                      |                      |
|--------------------------------------|----------------------|
| Form                                 | M 18 x 1 x 80        |
| Sensing distance in linear zone (mm) | 5                    |
| Housing                              | Stainless Steel      |
| Connection type                      | PVC 2.0 meter cable  |
| Part number reference                | IMB1805T             |
| Min./max. supply voltage             | 12 to 24 VDC         |
| Own consumption (Io)                 | 1 mA                 |
| Output voltage at 5mm                | 3 V                  |
| Voltage limits in linear zone        | 0.4 to 3 V at 24 VDC |
| Load resistance                      | 10 to 100 kΩ         |
| Constant ratio in linear zone        | At 24 V              |
|                                      | At 12 V              |
| Switching frequency                  | 10 kHz               |
| Operating temperature                | 0 to 60°C            |

Accessories


Mounting flanges, see page 3/102  
Connectors, see pages 3/100 to 3/101

Wiring

Wiring diagram

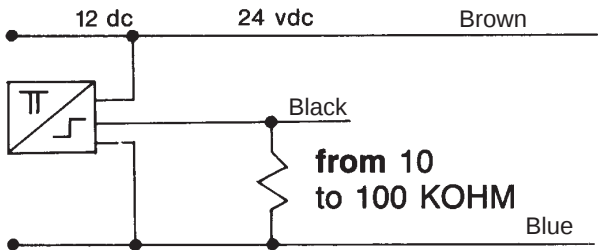

Response curve






Other Information:

For other characteristics, longer cables, longer barrels, different connectors, please consult the factory.

To order, please specify: **IMB1805T** Normally stocked items ☐ Catalog items produced to order

Products and specifications subject to change without notice.

## Inductive Proximity Detectors - Ø 4, M5, Ø 6.5, M8 - Cable

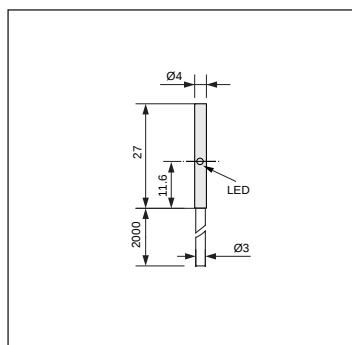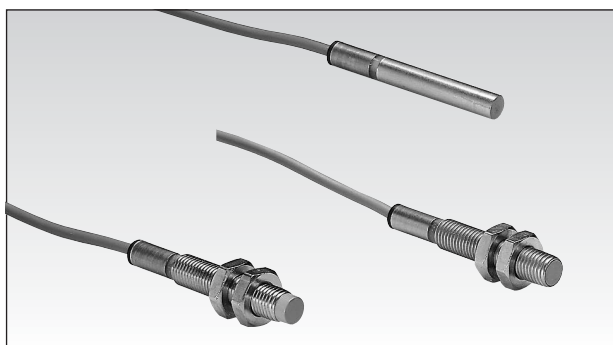

|                                         |                                    |                                    |
|-----------------------------------------|------------------------------------|------------------------------------|
| <b>Form</b>                             | Ø 4 screened                       | M5 screened                        |
| <b>Nominal sensing distance Sn (mm)</b> | 0.8                                | 0.8                                |
| <b>Housing</b>                          | Stainless steel                    | Stainless steel                    |
| <b>Tightening torque (Nm)</b>           | —                                  | 2.5                                |
| <b>Termination</b>                      | 2 m PVC cable *M8s/steel connector | 2 m PVC cable *M8s/steel connector |

### Part numbers

#### 3-wire DC types

|     |    |  |
|-----|----|--|
| PNP | NO |  |
|     | NC |  |
| NPN | NO |  |
|     | NC |  |

|                                                             |                                 |                                 |
|-------------------------------------------------------------|---------------------------------|---------------------------------|
| Min/max. supply voltage                                     | 10 to 30 V $\text{---}$         | 10 to 30 V $\text{---}$         |
| Max. load current (Ia)                                      | 150 mA                          | 150 mA                          |
| Residual open-state current (Ir) / Own consumption (Io)     | 0.05 mA / 17.5 mA               | 0.05 mA / 17.5 mA               |
| Voltage drop in closed state (Ud) / Max. ripple factor (Vr) | 2.5 V / < 10 %                  | 2.5 V / < 10 %                  |
| Switching frequency / Delay on pick-up (td)                 | 1 kHz / 10 ms                   | 1 kHz / 10 ms                   |
| LED indicator                                               | yes                             | yes                             |
| Protection against permanent short-circuits and overloads   | yes                             | yes                             |
| Protection against mis-connections of any type              | yes                             | yes                             |
| Conductor cross-section / External cable diameter           | 3 x 0.14 mm <sup>2</sup> / 3 mm | 3 x 0.14 mm <sup>2</sup> / 3 mm |



|            |
|------------|
| 84 717 000 |
| 84 717 001 |
| 84 717 100 |
| 84 717 101 |

|             |
|-------------|
| *84 717 022 |
| *84 717 023 |
| *84 717 122 |
| *84 717 123 |

|            |
|------------|
| 84 717 002 |
| 84 717 003 |
| 84 717 102 |
| 84 717 103 |

|             |
|-------------|
| *84 717 024 |
| *84 717 025 |
| *84 717 124 |
| *84 717 125 |

## Inductive Proximity Detectors - M8 - Connectors



|                                         |                      |                      |
|-----------------------------------------|----------------------|----------------------|
| <b>Form</b>                             | M8 screened          | M8 non-screened      |
| <b>Nominal sensing distance Sn (mm)</b> | 1                    | 2                    |
| <b>Housing</b>                          | Stainless steel      | Stainless steel      |
| <b>Tightening torque (Nm)</b>           | 10                   | 10                   |
| <b>Termination</b>                      | M8 s/steel connector | M8 s/steel connector |

### Part numbers

#### 3-wire DC types

|     |    |  |
|-----|----|--|
| PNP | NO |  |
|     | NC |  |
| NPN | NO |  |
|     | NC |  |

|                                                             |                         |                         |
|-------------------------------------------------------------|-------------------------|-------------------------|
| Min/max. supply voltage                                     | 10 to 40 V $\text{---}$ | 10 to 40 V $\text{---}$ |
| Max. load current (Ia)                                      | 200 mA                  | 200 mA                  |
| Residual open-state current (Ir) / Own consumption (Io)     | 0.05 mA / 7 mA          | 0.05 mA / 7 mA          |
| Voltage drop in closed state (Ud) / Max. ripple factor (Vr) | 3 V / < 10 %            | 3 V / < 10 %            |
| Switching frequency / Delay on pick-up (td)                 | 2 kHz / 50 ms           | 1.5 kHz / 50 ms         |
| LED indicator                                               | yes                     | yes                     |
| Protection against permanent short-circuits and overloads   | yes                     | yes                     |
| Protection against mis-connections of any type              | yes                     | yes                     |

### Accessories


Mounting flanges, see page 3/102  
Connectors, see pages 3/100 to 3/101

### Other information


Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



Ø 6.5 screened  
1.5  
Stainless steel  
—  
2 m PVC cable



M8 screened  
1  
Stainless steel  
10  
2 m PVC cable




M8 non-screened  
2  
Stainless steel  
10  
2 m PVC cable

1


84 717 004  
84 717 005  
84 717 104  
84 717 105  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
2 kHz / 50 ms  
yes  
yes  
yes  
3 x 0.14 mm<sup>2</sup> / 3 mm

84 717 006  
84 717 007  
84 717 106  
84 717 107  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
2 kHz / 50 ms  
yes  
yes  
yes  
3 x 0.14 mm<sup>2</sup> / 3 mm


84 717 008  
84 717 009  
84 717 108  
84 717 109  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
1.5 kHz / 50 ms  
yes  
yes  
yes  
3 x 0.14 mm<sup>2</sup> / 3 mm




M8 screened  
1  
Stainless steel  
10  
M12 s/steel connector



M8 non-screened  
2  
Stainless steel  
10  
M12 stainless steel connector



M8 screened  
1  
Stainless steel  
10  
M12 plastic connector



M8 non-screened  
2  
Stainless steel  
10  
M12 plastic connector

1

84 717 014  
84 717 015  
84 717 114  
84 717 115  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
2 kHz / 50 ms  
yes  
yes  
yes

84 717 016  
84 717 017  
84 717 116  
84 717 117  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
1.5 kHz / 50 ms  
yes  
yes  
yes

84 717 018  
84 717 019  
84 717 118  
84 717 119  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
2 kHz / 50 ms  
yes  
yes  
yes

84 717 020  
84 717 021  
84 717 120  
84 717 121  
10 to 40 V  $\equiv$   
200 mA  
0.05 mA / 7 mA  
3 V / < 10 %  
1.5 kHz / 50 ms  
yes  
yes  
yes

#### To order, specify:

Standard products





Standard products,  
non stocked

**1** Part number  
Example : Inductive proximity detector Ø4 84 717 000

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - M12 - Stainless Steel

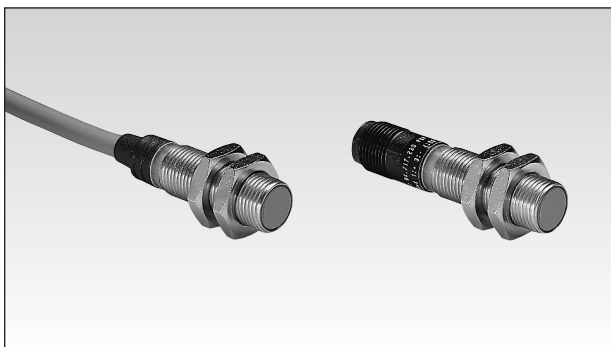

|                                         |                 |                    |                  |
|-----------------------------------------|-----------------|--------------------|------------------|
| <b>Form</b>                             | M12 screened    | M12 long, screened | M12 non-screened |
| <b>Nominal sensing distance Sn (mm)</b> | 2               | 2                  | 4                |
| <b>Housing</b>                          | Stainless steel | Stainless steel    | Stainless steel  |
| Tightening torque (Nm)                  | 25              | 25                 | 25               |
| Termination                             | 2 m PVC cable   | 2 m PVC cable      | 2 m PVC cable    |

## Part numbers

### 3-wire DC types

|                                                             |    |                                  |                                  |                                  |
|-------------------------------------------------------------|----|----------------------------------|----------------------------------|----------------------------------|
| <b>PNP</b>                                                  | NO | <b>84 717 226</b>                | <b>84 717 026</b>                | <b>84 717 228</b>                |
|                                                             | NC | <b>84 717 227</b>                | <b>84 717 027</b>                | <b>84 717 229</b>                |
| <b>NPN</b>                                                  | NO | <b>84 717 326</b>                | <b>84 717 126</b>                | <b>84 717 328</b>                |
|                                                             | NC | <b>84 717 327</b>                | <b>84 717 127</b>                | <b>84 717 329</b>                |
| Min/max. supply voltage                                     |    | 10 to 40 V $\equiv$              | 10 to 40 V $\equiv$              | 10 to 40 V $\equiv$              |
| Max. load current (Ia)                                      |    | 200 mA                           | 200 mA                           | 200 mA                           |
| Residual open-state current (Ir) / Own consumption (Io)     |    | 0.05 mA / 6.5 mA                 | 0.05 mA / 6.5 mA                 | 0.05 mA / 6.5 mA                 |
| Voltage drop in closed state (Ud) / Max. ripple factor (Vr) |    | 2 V / < 10 %                     | 2 V / < 10 %                     | 2 V / < 10 %                     |
| Switching frequency / Delay on pick-up (td)                 |    | 800 Hz / 10 ms                   | 800 Hz / 10 ms                   | 400 Hz / 10 ms                   |
| LED indicator                                               |    | yes                              | yes                              | yes                              |
| Protection against permanent short-circuits and overloads   |    | yes                              | yes                              | yes                              |
| Protection against mis-connections of any type              |    | yes                              | yes                              | yes                              |
| Conductor cross-section / External cable diameter           |    | 3 x 0.3 mm <sup>2</sup> / 5.2 mm | 3 x 0.3 mm <sup>2</sup> / 5.2 mm | 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

## Part numbers

### 2-wire AC types

|                                             |    |                                  |  |
|---------------------------------------------|----|----------------------------------|--|
| <b>Polarity</b>                             | NO | <b>84 717 626</b>                |  |
| <b>reversible</b>                           | NC | <b>84 717 627</b>                |  |
| Min/max. supply voltage                     |    | 20 to 250 V $\sim$               |  |
| Min/max. load current (Ia)                  |    | 5 to 500 mA                      |  |
| Residual open-state current (Ir)            |    | < 2 mA                           |  |
| Voltage drop in closed state (Ud)           |    | < 8 V                            |  |
| Switching frequency / Delay on pick-up (td) |    | 5 Hz / 100 ms                    |  |
| LED indicator                               |    | yes                              |  |
| Conductor cross-section                     |    | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |  |

## Other information




Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



# Inductive Proximity Detectors - M12 - Stainless Steel




|                                         |                        |                       |                       |
|-----------------------------------------|------------------------|-----------------------|-----------------------|
| <b>Form</b>                             | M12 long, non-screened | M12 screened          | M12 non-screened      |
| <b>Nominal sensing distance Sn (mm)</b> | 4                      | 2                     | 4                     |
| <b>Housing</b>                          | Stainless steel        | Stainless steel       | Stainless steel       |
| <b>Tightening torque (Nm)</b>           | 25                     | 25                    | 25                    |
| <b>Termination</b>                      | M12 plastic connector  | M12 s/steel connector | M12 s/steel connector |

## Part numbers

### 3-wire DC types

|                                                                    |    |                   |                   |                   |
|--------------------------------------------------------------------|----|-------------------|-------------------|-------------------|
| <b>PNP</b>                                                         | NO | <b>84 717 032</b> | <b>84 717 246</b> | <b>84 717 248</b> |
|                                                                    | NC | <b>84 717 033</b> | <b>84 717 247</b> | <b>84 717 249</b> |
| <b>NPN</b>                                                         | NO | <b>84 717 132</b> | <b>84 717 346</b> | <b>84 717 348</b> |
|                                                                    | NC | <b>84 717 133</b> | <b>84 717 347</b> | <b>84 717 349</b> |
| <b>Min/max. supply voltage</b>                                     |    | 10 to 40 V ~      | 10 to 40 V ~      | 10 to 40 V ~      |
| <b>Max. load current (Ia)</b>                                      |    | 200 mA            | 200 mA            | 200 mA            |
| <b>Residual open-state current (Ir) / Own consumption (Io)</b>     |    | 0.05 mA / 6.5 mA  | 0.05 mA / 6.5 mA  | 0.05 mA / 6.5 mA  |
| <b>Voltage drop in closed state (Ud) / Max. ripple factor (Vr)</b> |    | 2 V / < 10 %      | 2 V / < 10 %      | 2 V / < 10 %      |
| <b>Switching frequency / Delay on pick-up (td)</b>                 |    | 400 Hz / 10 ms    | 800 Hz / 10 ms    | 400 Hz / 10 ms    |
| <b>LED indicator</b>                                               |    | yes               | yes               | yes               |
| <b>Protection against permanent short-circuits and overloads</b>   |    | yes               | yes               | yes               |
| <b>Protection against mis-connections of any type</b>              |    | yes               | yes               | yes               |



|                                         |                       |                      |                      |
|-----------------------------------------|-----------------------|----------------------|----------------------|
| <b>Form</b>                             | M12 non-screened      | M12 screened         | M12 non-screened     |
| <b>Nominal sensing distance Sn (mm)</b> | 4                     | 2                    | 2                    |
| <b>Housing</b>                          | Stainless steel       | Stainless steel      | Stainless steel      |
| <b>Tightening torque (Nm)</b>           | 25                    | 25                   | 25                   |
| <b>Termination</b>                      | M12 plastic connector | M12s/steel connector | M12s/steel connector |

## Part numbers

### 2-wire AC types

|                                                    |    |                   |                   |                   |
|----------------------------------------------------|----|-------------------|-------------------|-------------------|
| <b>Polarity</b>                                    | NO | <b>84 717 632</b> | <b>84 717 646</b> | <b>84 717 648</b> |
| <b>reversible</b>                                  | NC | <b>84 717 633</b> | <b>84 717 647</b> | <b>84 717 649</b> |
| <b>Min/max. supply voltage</b>                     |    | 20 to 250 V ~     | 20 to 250 V ~     | 20 to 250 V ~     |
| <b>Min/max. load current (Ia)</b>                  |    | 5 to 500 mA       | 5 to 500 mA       | 5 to 500 mA       |
| <b>Residual open-state current (Ir)</b>            |    | < 2 mA            | < 2 mA            | < 2 mA            |
| <b>Voltage drop in closed state (Ud)</b>           |    | < 8 V             | < 8 V             | < 8 V             |
| <b>Switching frequency / Delay on pick-up (td)</b> |    | 5 Hz / 100 ms     | 5 Hz / 100 ms     | 5 Hz / 100 ms     |
| <b>LED indicator</b>                               |    | yes               | yes               | yes               |

## Accessories

Mounting flanges, see page 3/102  
Connectors, see pages 3/100 to 3/101





## Other information

Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - M12 - Plastic



|                                         |               |                    |                  |                        |
|-----------------------------------------|---------------|--------------------|------------------|------------------------|
| <b>Form</b>                             | M12 screened  | M12 long, screened | M12 non-screened | M12 long, non-screened |
| <b>Nominal sensing distance Sn (mm)</b> | 2             | 2                  | 4                | 4                      |
| <b>Housing</b>                          | Plastic       | Plastic            | Plastic          | Plastic                |
| <b>Tightening torque (Nm)</b>           | 1.5           | 1.5                | 1.5              | 1.5                    |
| <b>Termination</b>                      | 2 m PVC cable | 2 m PVC cable      | 2 m PVC cable    | 2 m PVC cable          |

## Part numbers

### 3-wire DC types





|                                                                    |                                  |  |
|--------------------------------------------------------------------|----------------------------------|--|
| <b>PNP</b>                                                         | NO                               |  |
|                                                                    | NC                               |  |
| <b>NPN</b>                                                         | NO                               |  |
|                                                                    | NC                               |  |
| <b>Min/max. supply voltage</b>                                     | 10 to 40 V $\equiv$              |  |
| <b>Max. load current (Ia)</b>                                      | 200 mA                           |  |
| <b>Residual open-state current (Ir) / Own consumption (Io)</b>     | 0.05 mA / 6.5 mA                 |  |
| <b>Voltage drop in closed state (Ud) / Max. ripple factor (Vr)</b> | 2 V / < 10 %                     |  |
| <b>Switching frequency / Delay on pick-up (td)</b>                 | 800 Hz / 10 ms                   |  |
| <b>LED indicator</b>                                               | yes                              |  |
| <b>Protection against perm. short-circuits and overloads</b>       | yes                              |  |
| <b>Protection against mis-connections of any type</b>              | yes                              |  |
| <b>Conductor cross-section / External cable diameter</b>           | 3 x 0.3 mm <sup>2</sup> / 5.2 mm |  |

|                                  |
|----------------------------------|
| <b>84 717 238</b>                |
| <b>84 717 239</b>                |
| <b>84 717 338</b>                |
| <b>84 717 339</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 800 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 038</b>                |
| <b>84 717 039</b>                |
| <b>84 717 138</b>                |
| <b>84 717 139</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 800 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 240</b>                |
| <b>84 717 241</b>                |
| <b>84 717 340</b>                |
| <b>84 717 341</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 400 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 040</b>                |
| <b>84 717 041</b>                |
| <b>84 717 140</b>                |
| <b>84 717 141</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 400 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |



|                                         |                       |                       |                       |                        |
|-----------------------------------------|-----------------------|-----------------------|-----------------------|------------------------|
| <b>Form</b>                             | M12 screened          | M12 long, screened    | M12 non-screened      | M12 long, non-screened |
| <b>Nominal sensing distance Sn (mm)</b> | 2                     | 2                     | 4                     | 4                      |
| <b>Housing</b>                          | Plastic               | Plastic               | Plastic               | Plastic                |
| <b>Tightening torque (Nm)</b>           | 1.5                   | 1.5                   | 1.5                   | 1.5                    |
| <b>Termination</b>                      | M12 plastic connector | M12 plastic connector | M12 plastic connector | M12 plastic connector  |

## Part numbers

### 3-wire DC types

|                                                                    |                     |  |
|--------------------------------------------------------------------|---------------------|--|
| <b>PNP</b>                                                         | NO                  |  |
|                                                                    | NC                  |  |
| <b>NPN</b>                                                         | NO                  |  |
|                                                                    | NC                  |  |
| <b>Min/max. supply voltage</b>                                     | 10 to 40 V $\equiv$ |  |
| <b>Max. load current (Ia)</b>                                      | 200 mA              |  |
| <b>Residual open-state current (Ir) / Own consumption (Io)</b>     | 0.05 mA / 6.5 mA    |  |
| <b>Voltage drop in closed state (Ud) / Max. ripple factor (Vr)</b> | 2 V / < 10 %        |  |
| <b>Switching frequency / Delay on pick-up (td)</b>                 | 800 Hz / 10 ms      |  |
| <b>LED indicator</b>                                               | yes                 |  |
| <b>Protection against perm. short-circuits and overloads</b>       | yes                 |  |
| <b>Protection against mis-connections of any type</b>              | yes                 |  |

|                     |
|---------------------|
| <b>84 717 242</b>   |
| <b>84 717 243</b>   |
| <b>84 717 342</b>   |
| <b>84 717 343</b>   |
| 10 to 40 V $\equiv$ |
| 200 mA              |
| 0.05 mA / 6.5 mA    |
| 2 V / < 10 %        |
| 800 Hz / 10 ms      |
| yes                 |
| yes                 |
| yes                 |

|                     |
|---------------------|
| <b>84 717 042</b>   |
| <b>84 717 043</b>   |
| <b>84 717 142</b>   |
| <b>84 717 143</b>   |
| 10 to 40 V $\equiv$ |
| 200 mA              |
| 0.05 mA / 6.5 mA    |
| 2 V / < 10 %        |
| 800 Hz / 10 ms      |
| yes                 |
| yes                 |
| yes                 |

|                     |
|---------------------|
| <b>84 717 244</b>   |
| <b>84 717 245</b>   |
| <b>84 717 344</b>   |
| <b>84 717 345</b>   |
| 10 to 40 V $\equiv$ |
| 200 mA              |
| 0.05 mA / 6.5 mA    |
| 2 V / < 10 %        |
| 400 Hz / 10 ms      |
| yes                 |
| yes                 |
| yes                 |

|                     |
|---------------------|
| <b>84 717 044</b>   |
| <b>84 717 045</b>   |
| <b>84 717 144</b>   |
| <b>84 717 145</b>   |
| 10 to 40 V $\equiv$ |
| 200 mA              |
| 0.05 mA / 6.5 mA    |
| 2 V / < 10 %        |
| 400 Hz / 10 ms      |
| yes                 |
| yes                 |
| yes                 |

## Accessories

Mounting flanges, see page 3/102  
Connectors, see pages 3/100 to 3/101.




## To order, specify:

|                   |                                |                      |                                                       |
|-------------------|--------------------------------|----------------------|-------------------------------------------------------|
| Standard products | Standard products, non stocked | <b>1</b> Part number | Example : Inductive proximity detector M12 84 717 028 |
|-------------------|--------------------------------|----------------------|-------------------------------------------------------|

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - M18 - Stainless Steel



|                                                       |
|-------------------------------------------------------|
| <b>Form</b>                                           |
| <b>Nominal sensing distance <math>S_n</math> (mm)</b> |
| <b>Housing</b>                                        |
| <b>Tightening torque (Nm)</b>                         |
| <b>Termination</b>                                    |

|                       |
|-----------------------|
| M18 screened          |
| 5                     |
| Stainless steel       |
| 50                    |
| 2 m PVC cable         |
| *M12s/steel connector |

|                       |
|-----------------------|
| M18 non-screened      |
| 8                     |
| Stainless steel       |
| 50                    |
| 2 m PVC cable         |
| *M12s/steel connector |

|                    |
|--------------------|
| M18 long, screened |
| 5                  |
| Stainless steel    |
| 50                 |
| 2 m PVC cable      |

## Part numbers

### 3-wire DC types

|            |           |
|------------|-----------|
| <b>PNP</b> | <b>NO</b> |
|            | <b>NC</b> |
| <b>NPN</b> | <b>NO</b> |
|            | <b>NC</b> |

|                                                                       |
|-----------------------------------------------------------------------|
| Min/max. supply voltage                                               |
| Max. load current ( $I_a$ )                                           |
| Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )     |
| Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ ) |
| Switching frequency / Delay on pick-up ( $t_d$ )                      |
| LED indicator                                                         |
| Protection against permanent short-circuits and overloads             |
| Protection against mis-connections of any type                        |
| Conductor cross-section / External cable diameter                     |

|                                  |
|----------------------------------|
| <b>84 717 250</b>                |
| <b>84 717 251</b>                |
| <b>84 717 350</b>                |
| <b>84 717 351</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 500 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 252</b>                |
| <b>84 717 253</b>                |
| <b>84 717 352</b>                |
| <b>84 717 353</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 400 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 050</b>                |
| <b>84 717 051</b>                |
| <b>84 717 150</b>                |
| <b>84 717 151</b>                |
| 10 to 40 V $\equiv$              |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 500 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

## Part numbers

### 2-wire AC types

|                                                  |           |                                                                                   |
|--------------------------------------------------|-----------|-----------------------------------------------------------------------------------|
| <b>Polarity</b>                                  | <b>NO</b> |  |
| <b>reversible</b>                                | <b>NC</b> |  |
| Min/max. supply voltage                          |           |                                                                                   |
| Min/max. load current ( $I_a$ )                  |           |                                                                                   |
| Residual open-state current ( $I_r$ )            |           |                                                                                   |
| Voltage drop in closed state ( $U_d$ )           |           |                                                                                   |
| Switching frequency / Delay on pick-up ( $t_d$ ) |           |                                                                                   |
| LED indicator                                    |           |                                                                                   |
| Conductor cross-section                          |           |                                                                                   |

|                                  |
|----------------------------------|
| <b>84 717 650</b>                |
| <b>84 717 651</b>                |
| 20 to 250 V $\sim$               |
| 5 to 500 mA                      |
| < 2 mA                           |
| < 8 V                            |
| 5 Hz / 100 ms                    |
| yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>*84 717 672</b>               |
| <b>*84 717 673</b>               |
| 20 to 250 V $\sim$               |
| 5 to 500 mA                      |
| < 2 mA                           |
| < 8 V                            |
| 5 Hz / 100 ms                    |
| yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |


|                                  |
|----------------------------------|
| <b>84 717 652</b>                |
| <b>84 717 653</b>                |
| 20 to 250 V $\sim$               |
| 5 to 500 mA                      |
| < 2 mA                           |
| < 8 V                            |
| 5 Hz / 100 ms                    |
| yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

## Other information


Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




M18 long, non-screened  
8  
Stainless steel  
50  
2 m PVC cable




M18 screened  
5  
Stainless steel  
50  
M12 plastic connector  
\*M12s/steel connector



M18 long, screened  
5  
Stainless steel  
50  
M12 plastic connector



M18 non-screened  
8  
Stainless steel  
50  
M12 plastic connector  
\*M12s/steel connector



M18 long, non-screened  
8  
Stainless steel  
50  
M12 plastic connector

1

84 717 052  
84 717 053  
84 717 152  
84 717 153  
10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
400 Hz / 10 ms  
yes  
yes  
yes  
3 x 0.3 mm<sup>2</sup> / 5.2 mm

84 717 254  
84 717 255  
84 717 354  
84 717 355  
\*84 717 258  
\*84 717 259  
\*84 717 358  
\*84 717 359  
10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
500 Hz / 10 ms  
yes  
yes  
yes  
—

84 717 054  
84 717 055  
84 717 154  
84 717 155  
10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
500 Hz / 10 ms  
yes  
yes  
yes  
—

84 717 256  
84 717 257  
84 717 356  
84 717 357  
\*84 717 260  
\*84 717 261  
\*84 717 360  
\*84 717 361  
10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
400 Hz / 10 ms  
yes  
yes  
yes  
—

84 717 056  
84 717 057  
84 717 156  
84 717 157  
10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
400 Hz / 10 ms  
yes  
yes  
yes  
—

1

—  
—  
—  
—  
—  
—  
—  
—  
—  
—

84 717 654  
84 717 655  
20 to 250 V ~  
5 to 500 mA  
< 2 mA  
< 8 V  
5 Hz / 100 ms  
yes  
—

—  
—  
—  
—  
—  
—  
—  
—  
—  
—

84 717 656  
84 717 657  
20 to 250 V ~  
5 to 500 mA  
< 2 mA  
< 8 V  
5 Hz / 100 ms  
yes  
—

—  
—  
—  
—  
—  
—  
—  
—  
—  
—

3

#### To order, specify:



Standard products



Standard products,  
non stocked

1




Part number

Example : Inductive proximity detector M18 84 717 250

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - M18 - Plastic



|                                                       |
|-------------------------------------------------------|
| <b>Form</b>                                           |
| <b>Nominal sensing distance <math>S_n</math> (mm)</b> |
| <b>Housing</b>                                        |
| Tightening torque (Nm)                                |
| Termination                                           |

|               |
|---------------|
| M18 screened  |
| 5             |
| Plastic       |
| 5             |
| 2 m PVC cable |

|                    |
|--------------------|
| M18 long, screened |
| 5                  |
| Plastic            |
| 5                  |
| 2 m PVC cable      |

|                  |
|------------------|
| M18 non-screened |
| 8                |
| Plastic          |
| 5                |
| 2 m PVC cable    |

## Part numbers

### 3-wire DC types

|            |           |
|------------|-----------|
| <b>PNP</b> | <b>NO</b> |
|            | <b>NC</b> |
| <b>NPN</b> | <b>NO</b> |
|            | <b>NC</b> |

|                                                                       |
|-----------------------------------------------------------------------|
| Min/max. supply voltage                                               |
| Max. load current ( $I_a$ )                                           |
| Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )     |
| Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ ) |
| Switching frequency / Delay on pick-up ( $t_d$ )                      |
| LED indicator                                                         |
| Protection against permanent short-circuits and overloads             |
| Protection against mis-connections of any type                        |
| Conductor cross-section / External cable diameter                     |

|                                  |
|----------------------------------|
| <b>84 717 262</b>                |
| <b>84 717 263</b>                |
| <b>84 717 362</b>                |
| <b>84 717 363</b>                |
| 10 to 40 V $\text{---}$          |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 500 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 062</b>                |
| <b>84 717 063</b>                |
| <b>84 717 162</b>                |
| <b>84 717 163</b>                |
| 10 to 40 V $\text{---}$          |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 500 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 264</b>                |
| <b>84 717 265</b>                |
| <b>84 717 364</b>                |
| <b>84 717 365</b>                |
| 10 to 40 V $\text{---}$          |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 400 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

## Part numbers

### 2-wire AC types

|                                             |                                                                                             |
|---------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>Polarity</b>                             | <b>NO</b>  |
| <b>reversible</b>                           | <b>NC</b>  |
| Min/max. supply voltage                     |                                                                                             |
| Min/max. load current (Ia)                  |                                                                                             |
| Residual open-state current (Ir)            |                                                                                             |
| Voltage drop in closed state (Ud)           |                                                                                             |
| Switching frequency / Delay on pick-up (td) |                                                                                             |
| LED indicator                               |                                                                                             |
| Conductor cross-section                     |                                                                                             |

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

|                                  |
|----------------------------------|
| <b>84 717 662</b>                |
| <b>84 717 663</b>                |
| 20 to 250 V $\sim$               |
| 5 to 500 mA                      |
| < 2 mA                           |
| < 8 V                            |
| 5 Hz / 100 ms                    |
| yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

## Accessories

|                                       |
|---------------------------------------|
| Mounting flanges, see page 3/102      |
| Connectors, see pages 3/100 to 3/101. |

## Other information

Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

|                        |                       |                       |                       |                        |
|------------------------|-----------------------|-----------------------|-----------------------|------------------------|
|                        |                       |                       |                       |                        |
| M18 long, non-screened | M18 screened          | M18 long, screened    | M18 non-screened      | M18 long, non-screened |
| 8                      | 5                     | 5                     | 8                     | 8                      |
| Plastic                | Plastic               | Plastic               | Plastic               | Plastic                |
| 5                      | 5                     | 5                     | 5                     | 5                      |
| 2 m PVC cable          | M12 plastic connector | M12 plastic connector | M12 plastic connector | M12 plastic connector  |

1

|                                  |                                  |                                  |                   |                   |
|----------------------------------|----------------------------------|----------------------------------|-------------------|-------------------|
| <b>84 717 064</b>                | <b>84 717 266</b>                | <b>84 717 066</b>                | <b>84 717 268</b> | <b>84 717 068</b> |
| <b>84 717 065</b>                | <b>84 717 267</b>                | <b>84 717 067</b>                | <b>84 717 269</b> | <b>84 717 069</b> |
| <b>84 717 164</b>                | <b>84 717 366</b>                | <b>84 717 166</b>                | <b>84 717 368</b> | <b>84 717 168</b> |
| <b>84 717 165</b>                | <b>84 717 367</b>                | <b>84 717 167</b>                | <b>84 717 369</b> | <b>84 717 169</b> |
| 10 to 40 V $\sim$                | 10 to 40 V $\sim$                | 10 to 40 V $\sim$                | 10 to 40 V $\sim$ | 10 to 40 V $\sim$ |
| 200 mA                           | 200 mA                           | 200 mA                           | 200 mA            | 200 mA            |
| 0.05 mA / 6.5 mA                 | 0.05 mA / 6.5 mA                 | 0.05 mA / 6.5 mA                 | 0.05 mA / 6.5 mA  | 0.05 mA / 6.5 mA  |
| 2 V / < 10 %                     | 2 V / < 10 %                     | 2 V / < 10 %                     | 2 V / < 10 %      | 2 V / < 10 %      |
| 400 Hz / 10 ms                   | 500 Hz / 10 ms                   | 500 Hz / 10 ms                   | 400 Hz / 10 ms    | 400 Hz / 10 ms    |
| yes                              | yes                              | yes                              | yes               | yes               |
| yes                              | yes                              | yes                              | yes               | yes               |
| yes                              | yes                              | yes                              | yes               | yes               |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm | 3 x 0.3 mm <sup>2</sup> / 5.2 mm | 3 x 0.3 mm <sup>2</sup> / 5.2 mm | —                 | —                 |

1

|                                  |  |  |  |  |
|----------------------------------|--|--|--|--|
| <b>84 717 664</b>                |  |  |  |  |
| <b>84 717 665</b>                |  |  |  |  |
| 20 to 250 V $\sim$               |  |  |  |  |
| 5 to 500 mA                      |  |  |  |  |
| < 2 mA                           |  |  |  |  |
| < 8 V                            |  |  |  |  |
| 5 Hz / 100 ms                    |  |  |  |  |
| yes                              |  |  |  |  |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |  |  |  |  |

3


#### To order, specify:

|                   |                                |                                                                               |
|-------------------|--------------------------------|-------------------------------------------------------------------------------|
| Standard products | Standard products, non stocked | <b>1</b> Part number<br>Example : Inductive proximity detector M18 84 717 056 |
|-------------------|--------------------------------|-------------------------------------------------------------------------------|


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


# Inductive Proximity Detectors - M30 - Stainless Steel - 3-Wire DC Types

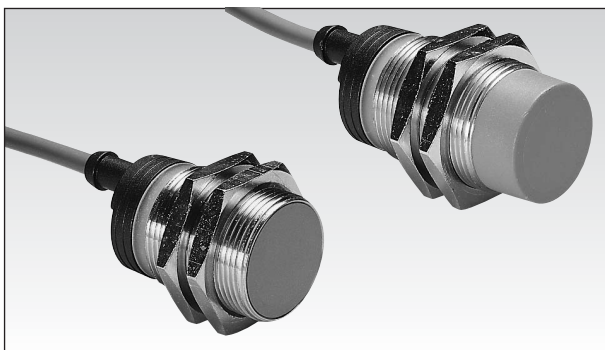


**Form**  
**Nominal sensing distance  $S_n$  (mm)**  
**Housing**  
 Tightening torque (Nm)  
 Termination

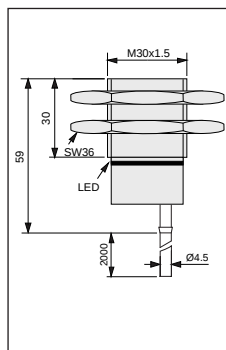

M30 screened  
 10  
 Stainless steel  
 100  
 2 m PVC cable

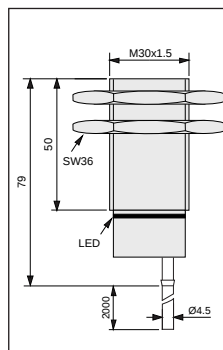

M30 long, screened  
 10  
 Stainless steel  
 100  
 2 m PVC cable

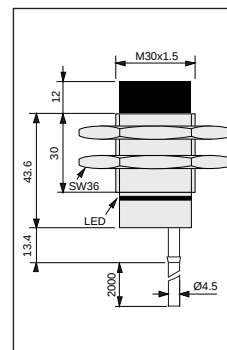

M30 non-screened  
 15  
 Stainless steel  
 100  
 2 m PVC cable

## Part numbers

|                                                                       |    |  |
|-----------------------------------------------------------------------|----|--|
| PNP                                                                   | NO |  |
|                                                                       | NC |  |
| NPN                                                                   | NO |  |
|                                                                       | NC |  |
| Min/max. supply voltage                                               |    |  |
| Max. load current ( $I_a$ )                                           |    |  |
| Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )     |    |  |
| Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ ) |    |  |
| Switching frequency (F) / Delay on pick-up ( $t_d$ )                  |    |  |
| LED indicator                                                         |    |  |
| Protection against permanent short-circuits and overloads             |    |  |
| Protection against mis-connections of any type                        |    |  |
| Conductor cross-section / External cable diameter                     |    |  |


84 717 274  
 84 717 275  
 84 717 374  
 84 717 375  
 10 to 40 V ~  
 200 mA  
 0.05 mA / 6.5 mA  
 2 V / < 10 %  
 300 Hz / 10 ms  
 yes  
 yes  
 yes  
 3 x 0.3 mm<sup>2</sup> / 5.2 mm

84 717 074  
 84 717 075  
 84 717 174  
 84 717 175  
 10 to 40 V ~  
 200 mA  
 0.05 mA / 6.5 mA  
 2 V / < 10 %  
 300 Hz / 10 ms  
 yes  
 yes  
 yes  
 3 x 0.3 mm<sup>2</sup> / 5.2 mm


84 717 276  
 84 717 277  
 84 717 376  
 84 717 377  
 10 to 40 V ~  
 200 mA  
 0.05 mA / 6.5 mA  
 2 V / < 10 %  
 100 Hz / 10 ms  
 yes  
 yes  
 yes  
 3 x 0.3 mm<sup>2</sup> / 5.2 mm

1


# Inductive Proximity Detectors - M30 - Stainless Steel - 2-Wire AC Types

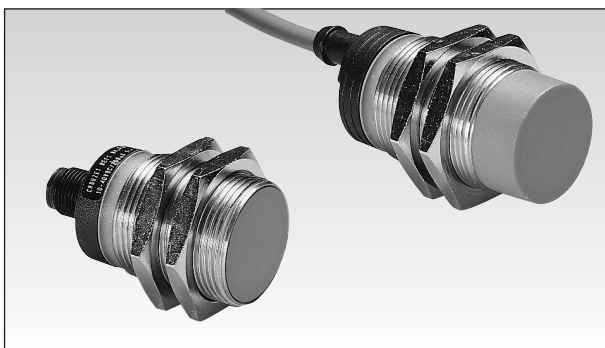


**Form**  
**Nominal sensing distance  $S_n$  (mm)**  
**Housing**  
 Tightening torque (Nm)  
 Termination



M30 screened  
 10  
 Stainless steel  
 100  
 2 m PVC cable



M30 non-screened  
 15  
 Stainless steel  
 100  
 2 m PVC cable



M30 non-screened  
 15  
 Stainless steel  
 100  
 M12 plastic connector

## Part numbers

|                                                      |               |  |
|------------------------------------------------------|---------------|--|
| Polarity                                             | NO            |  |
|                                                      | reversible NC |  |
| Min/max. supply voltage                              |               |  |
| Min/max. load current ( $I_a$ )                      |               |  |
| Residual open-state current ( $I_r$ )                |               |  |
| Voltage drop in closed state ( $U_d$ )               |               |  |
| Switching frequency (F) / Delay on pick-up ( $t_d$ ) |               |  |
| LED indicator                                        |               |  |
| Conductor cross-section                              |               |  |

84 717 674  
 84 717 675  
 20 to 250 V ~  
 5 to 500 mA  
 < 2 mA  
 < 8 V  
 5 Hz / 100 ms  
 yes  
 2 x 0.5 mm<sup>2</sup> / 5.2 mm

84 717 676  
 84 717 677  
 20 to 250 V ~  
 5 to 500 mA  
 < 2 mA  
 < 8 V  
 5 Hz / 100 ms  
 yes  
 2 x 0.5 mm<sup>2</sup> / 5.2 mm

84 717 680  
 84 717 681  
 20 to 250 V ~  
 5 to 500 mA  
 < 2 mA  
 < 8 V  
 5 Hz / 100 ms  
 yes  
 —


1

## Other information


Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




M30 non-screened  
15  
Stainless steel  
100  
M12 plastic connector




M30 long, non-screened  
15  
Stainless steel  
100  
M12 plastic connector



M30 long, non-screened  
15  
Stainless steel  
100  
2 m PVC cable



M30 screened  
10  
Stainless steel  
100  
M12 plastic connector  
\*M12s/steel connector



M30 long, screened  
10  
Stainless steel  
100  
M12 plastic connector  
\*M12s/steel connector

|                  |
|------------------|
| 84 717 280       |
| 84 717 281       |
| 84 717 380       |
| 84 717 381       |
| 10 to 40 V ~     |
| 200 mA           |
| 0.05 mA / 6.5 mA |
| 2 V / < 10 %     |
| 100 Hz / 10 ms   |
| yes              |
| yes              |
| yes              |


|                  |
|------------------|
| 84 717 080       |
| 84 717 081       |
| 84 717 180       |
| 84 717 181       |
| 10 to 40 V ~     |
| 200 mA           |
| 0.05 mA / 6.5 mA |
| 2 V / < 10 %     |
| 100 Hz / 10 ms   |
| yes              |
| yes              |
| yes              |

|                                  |
|----------------------------------|
| 84 717 076                       |
| 84 717 077                       |
| 84 717 176                       |
| 84 717 177                       |
| 10 to 40 V ~                     |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 100 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |


|                  |
|------------------|
| 84 717 278       |
| 84 717 279       |
| 84 717 378       |
| 84 717 379       |
| 10 to 40 V ~     |
| 200 mA           |
| 0.05 mA / 6.5 mA |
| 2 V / < 10 %     |
| 300 Hz / 10 ms   |
| yes              |
| yes              |
| yes              |

|                  |
|------------------|
| 84 717 078       |
| 84 717 079       |
| 84 717 178       |
| 84 717 179       |
| 10 to 40 V ~     |
| 200 mA           |
| 0.05 mA / 6.5 mA |
| 2 V / < 10 %     |
| 300 Hz / 10 ms   |
| yes              |
| yes              |
| yes              |


1



M30 screened  
10  
Stainless steel  
100  
M12 plastic connector



M30 screened  
10  
Stainless steel  
100  
M12s/steel connector



M30 non-screened  
15  
Stainless steel  
100  
M12s/steel connector

|               |
|---------------|
| 84 717 678    |
| 84 717 679    |
| 20 to 250 V ~ |
| 5 to 500 mA   |
| < 2 mA        |
| < 8 V         |
| 5 Hz / 100 ms |
| yes           |

|               |
|---------------|
| 84 717 694    |
| 84 717 695    |
| 20 to 250 V ~ |
| 5 to 500 mA   |
| < 2 mA        |
| < 8 V         |
| 5 Hz / 100 ms |
| yes           |

|               |
|---------------|
| 84 717 684    |
| 84 717 685    |
| 20 to 250 V ~ |
| 5 to 500 mA   |
| < 2 mA        |
| < 8 V         |
| 5 Hz / 100 ms |
| yes           |

1

#### To order, specify:



Standard products



Standard products,  
non stocked







Part number

Example : Inductive proximity detector M30 84 717 274

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - M30 - Plastic

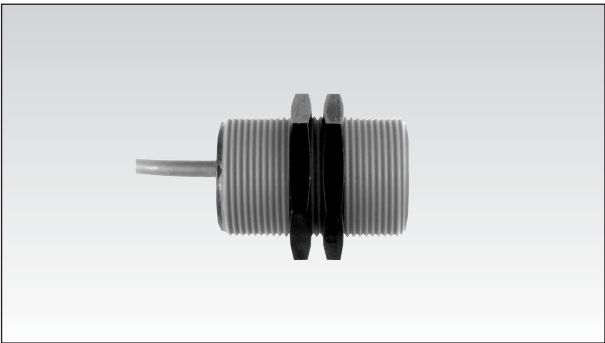

|                                         |
|-----------------------------------------|
| <b>Form</b>                             |
| <b>Nominal sensing distance Sn (mm)</b> |
| <b>Housing</b>                          |
| Tightening torque (Nm)                  |
| Termination                             |

|               |
|---------------|
| M30 screened  |
| 10            |
| Plastic       |
| 15            |
| 2 m PVC cable |

|                    |
|--------------------|
| M30 long, screened |
| 10                 |
| Plastic            |
| 15                 |
| 2 m PVC cable      |

|                  |
|------------------|
| M30 non-screened |
| 15               |
| Plastic          |
| 15               |
| 2 m PVC cable    |

## Part numbers

### 3-wire DC types

|            |           |  |
|------------|-----------|--|
| <b>PNP</b> | <b>NO</b> |  |
|            | <b>NC</b> |  |
| <b>NPN</b> | <b>NO</b> |  |
|            | <b>NC</b> |  |

|                                                             |
|-------------------------------------------------------------|
| Min/max. supply voltage                                     |
| Max. load current (Ia)                                      |
| Residual open-state current (Ir) / Own consumption (Io)     |
| Voltage drop in closed state (Ud) / Max. ripple factor (Vr) |
| Switching frequency (F) / Delay on pick-up (td)             |
| LED indicator                                               |
| Protection against permanent short-circuits and overloads   |
| Protection against mis-connections of any type              |
| Conductor cross-section / External cable diameter           |

|                                  |
|----------------------------------|
| <b>84 717 286</b>                |
| <b>84 717 287</b>                |
| <b>84 717 386</b>                |
| <b>84 717 387</b>                |
| 10 to 40 V ---                   |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 300 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 086</b>                |
| <b>84 717 087</b>                |
| <b>84 717 186</b>                |
| <b>84 717 187</b>                |
| 10 to 40 V ---                   |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 300 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

|                                  |
|----------------------------------|
| <b>84 717 288</b>                |
| <b>84 717 289</b>                |
| <b>84 717 388</b>                |
| <b>84 717 389</b>                |
| 10 to 40 V ---                   |
| 200 mA                           |
| 0.05 mA / 6.5 mA                 |
| 2 V / < 10 %                     |
| 100 Hz / 10 ms                   |
| yes                              |
| yes                              |
| yes                              |
| 3 x 0.3 mm <sup>2</sup> / 5.2 mm |

## Part numbers

### 2-wire AC types

|                   |           |  |
|-------------------|-----------|--|
| <b>Polarity</b>   | <b>NO</b> |  |
| <b>reversible</b> | <b>NC</b> |  |

|                                                 |
|-------------------------------------------------|
| Min/max. supply voltage                         |
| Min/max. load current (Ia)                      |
| Residual open-state current (Ir)                |
| Voltage drop in closed state (Ud)               |
| Switching frequency (F) / Delay on pick-up (td) |
| LED indicator                                   |
| Conductor cross-section                         |

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

|                                  |
|----------------------------------|
| <b>84 717 686</b>                |
| <b>84 717 687</b>                |
| 20 to 250 V ~                    |
| 5 to 500 mA                      |
| < 2 mA                           |
| < 8 V                            |
| 5 Hz / 100 ms                    |
| yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

## Accessories


|                                      |
|--------------------------------------|
| Mounting flanges, see page 3/102     |
| Connectors, see pages 3/100 to 3/101 |

## Other information


Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




M30 long, non-screened  
15  
Plastic  
15  
2 m PVC cable




M30 screened  
10  
Plastic  
25  
M12 plastic connector



M30 long, screened  
10  
Plastic  
15  
M12 plastic connector



M30 non-screened  
15  
Plastic  
15  
M12 plastic connector



M30 long, non-screened  
15  
Plastic  
15  
M12 plastic connector

1

84 717 088  
84 717 089  
84 717 188  
84 717 189

10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
100 Hz / 10 ms  
yes  
yes  
yes  
3 x 0.3 mm<sup>2</sup> / 5.2 mm

84 717 290  
84 717 291  
84 717 390  
84 717 391

10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
300 Hz / 10 ms  
yes  
yes  
yes

84 717 090  
84 717 091  
84 717 190  
84 717 191

10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
300 Hz / 10 ms  
yes  
yes  
yes

84 717 292  
84 717 293  
84 717 392  
84 717 393

10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
100 Hz / 10 ms  
yes  
yes  
yes

84 717 092  
84 717 093  
84 717 192  
84 717 193

10 to 40 V ~  
200 mA  
0.05 mA / 6.5 mA  
2 V / < 10 %  
100 Hz / 10 ms  
yes  
yes  
yes

1

84 717 688  
84 717 689

20 to 250 V ~  
5 to 500 mA  
< 2 mA  
< 8 V  
5 Hz / 100 ms  
yes  
2 x 0.5 mm<sup>2</sup> / 5.2 mm

3

#### To order, specify:



Standard products



Standard products,  
non stocked

1

Part number

Example : Inductive proximity detector M30 84 717 286

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - Flat Pack

- 4-wire NO and NC operation
- Easy to mount: only 2 M 3.5 screws required
- Ideal for conveying and packaging machine applications
- Capacitive detection version available in same housing
- EMC immunity: 10 V/m



**VERY HIGH  
EMC IMMUNITY**

|                                     |
|-------------------------------------|
| Form                                |
| Nominal sensing distance $S_n$ (mm) |
| Housing                             |
| Tightening torque (Nm)              |
| Termination                         |

|                         |                         |
|-------------------------|-------------------------|
| 55 x 35 screened        | 55 x 35 non-screened    |
| 10                      | 15                      |
| Plastic                 | Plastic                 |
| —                       | —                       |
| 2 m PVC cable Connector | 2 m PVC cable Connector |


## Part numbers

### 4-wire DC types

|                                                                       |   |  |
|-----------------------------------------------------------------------|---|--|
| PNP NO / NC                                                           | / |  |
| NPN NO / NC                                                           | / |  |
| Min/max. supply voltage                                               |   |  |
| Max. load current ( $I_a$ )                                           |   |  |
| Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )     |   |  |
| Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ ) |   |  |
| Switching frequency (F) / Delay on pick-up ( $t_d$ )                  |   |  |
| LED indicator                                                         |   |  |
| Protection against permanent short-circuits and overloads             |   |  |
| Protection against mis-connections of any type                        |   |  |
| Conductor cross-section / External cable diameter                     |   |  |

|                                  |                   |                                  |                   |
|----------------------------------|-------------------|----------------------------------|-------------------|
| <b>84 718 024</b>                | <b>84 718 036</b> | <b>84 718 030</b>                | <b>84 718 042</b> |
| <b>84 718 026</b>                | <b>84 718 038</b> | <b>84 718 032</b>                | <b>84 718 044</b> |
| 10 to 40 V $\equiv$              |                   | 10 to 40 V $\equiv$              |                   |
| 200 mA                           |                   | 200 mA                           |                   |
| 0.05 mA / 7 mA                   |                   | 0.05 mA / 7 mA                   |                   |
| < 2 V / < 10 %                   |                   | < 2 V / < 10 %                   |                   |
| 300 Hz / 50 ms                   |                   | 100 Hz / 50 ms                   |                   |
| yes                              |                   | yes                              |                   |
| yes                              |                   | yes                              |                   |
| yes                              |                   | yes                              |                   |
| 4 x 0.3 mm <sup>2</sup> / 5.2 mm |                   | 4 x 0.3 mm <sup>2</sup> / 5.2 mm |                   |

## Dimensions

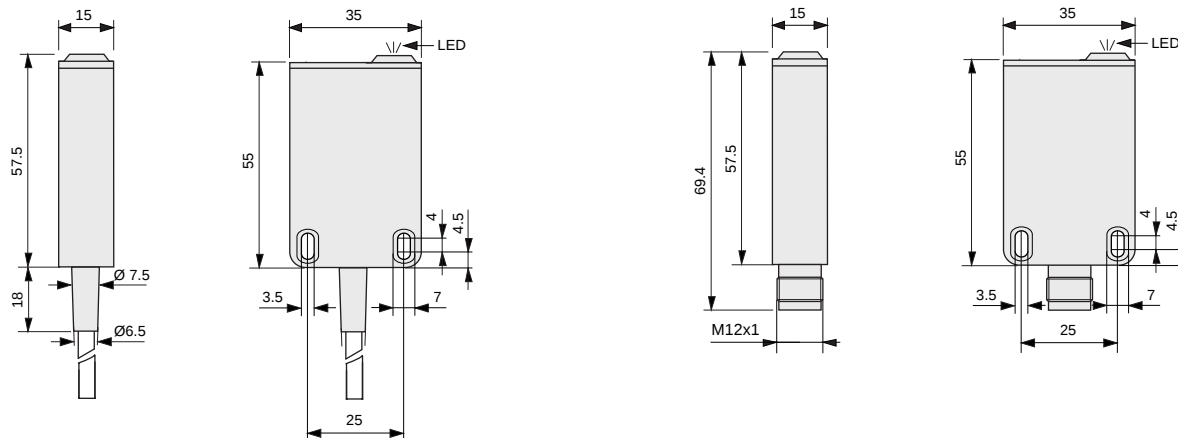

mm


| Other information                                                                                                                                | To order, specify:                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Special adaptations are available depending on the type of request and quantity required.<br>Eg. cable length, tube length, connector type, etc. | <div> <div></div> <div>Standard products</div> </div> <div> <div></div> <div>Standard products, non stocked</div> </div> <div> <div>1</div> <div>Part number</div> </div> <div> <div>Example : Inductive proximity detector</div> <div>84 718 024</div> </div> |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors - 40 x 40

- 5-position rotary head
- Conform to DIN 43 694
- Reinforced glass polyamide housing
- 1 "on" LED
- 1 detection LED
- 4-wire NO and NC operation
- 2-wire ~ and --- version



84 718 006

## Form

Nominal sensing distance  $S_n$  (mm)

## Housing

Tightening torque (Nm)

Termination

40 x 40 non-screened

25

Plastic

Screw terminal

## Part numbers

### 4-wire DC types

PNP NO / NC  / 

NPN NO / NC  / 

Min/max. supply voltage

Max. load current ( $I_a$ )

Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )

Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ )

Switching frequency (F) / Delay on pick-up (td)

LED indicator

Protection against permanent short-circuits and overloads

Protection against mis-connections of any type

Conductor cross-section / External cable diameter

84 718 006

84 718 008

10 to 55 V ---

200 mA

< 0.05 mA / 25 mA

< 3.5 V / < 10 %

100 Hz / < 100 ms

yes - power supply and output

yes

yes

## Part numbers

### 2-wire AC / DC types

Polarity reversible NO  or NC  programmable

Min/max. supply voltage

Max. load current ( $I_a$ )

Residual open-state current ( $I_r$ )

Voltage drop in closed state ( $U_d$ )

Switching frequency (F) / Delay on pick-up (td)

LED indicator

Short-circuit protection

Conductor cross-section

84 718 010

20 to 250 V ~ / ---

5 to 180 mA

< 1.7 mA @ 120 V ~

< 10.5 V


100 Hz / 200 ms

yes - power supply and output


yes

## Connections

84 718 006




84 718 008



## Dimensions (mm)

### 5-position rotary head

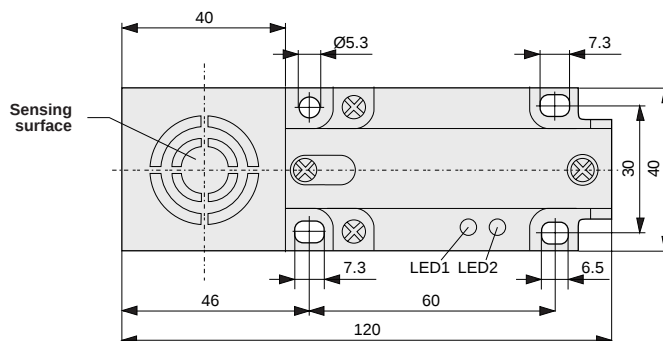

## Other information

Special adaptations are available depending on the type of request and quantity required.  
Eg. cable length, tube length, connector type, etc.

## To order, specify:

Standard products

1

Part number

Standard products,  
non stocked

Example : Inductive proximity detector  
40 x 40 84 718 006



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## NAMUR Inductive Proximity Detectors (Acc. DIN 19234) M8 - M12



84 717 741



|                                         |
|-----------------------------------------|
| <b>Form</b>                             |
| <b>Nominal sensing distance Sn (mm)</b> |
| <b>Housing</b>                          |
| Tightening torque (Nm)                  |
| Termination                             |

|                 |
|-----------------|
| M8 screened     |
| 1               |
| Stainless steel |
| 2 m PVC cable   |

|                 |
|-----------------|
| M8 non-screened |
| 2               |
| Stainless steel |
| 2 m PVC cable   |

### Part numbers

#### 2-wire DC NAMUR types

|                                                   |
|---------------------------------------------------|
| NC                                                |
| Min/max. supply voltage                           |
| ON state current with V supply=8.2 V              |
| OFF state current with V supply=8.2 V             |
| Current at specified Sn with V supply=8.2 V       |
| Max. current (Ia)                                 |
| Switching frequency (F)                           |
| Conductor cross-section / External cable diameter |


|                                 |
|---------------------------------|
| <b>84 717 707</b>               |
| 6 to 35 V $\pm$                 |
| < 1 mA                          |
| > 2.2 mA                        |
| 1.55 mA                         |
| 9.35 mA                         |
| 2 kHz                           |
| 2 x 0.14 mm <sup>2</sup> / 3 mm |

|                                 |
|---------------------------------|
| <b>84 717 709</b>               |
| 6 to 35 V $\pm$                 |
| < 1 mA                          |
| > 2.2 mA                        |
| 1.55 mA                         |
| 9.35 mA                         |
| 1.5 kHz                         |
| 2 x 0.14 mm <sup>2</sup> / 3 mm |



### Accessories

|                                     |
|-------------------------------------|
| Mounting flanges, see page 3/102    |
| Connectors, see page 3/100 to 3/101 |

## NAMUR Inductive Proximity Detectors (Acc. DIN 19234) M18 - M30

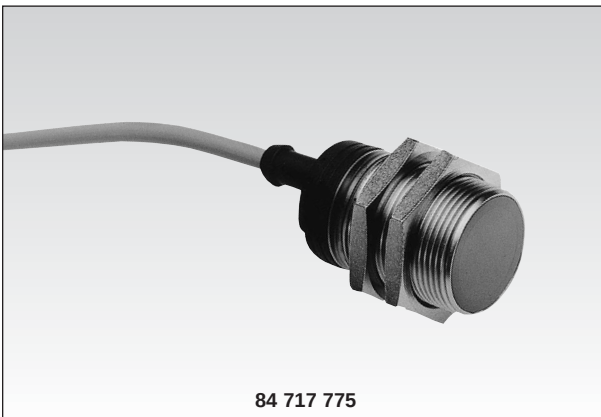

84 717 775

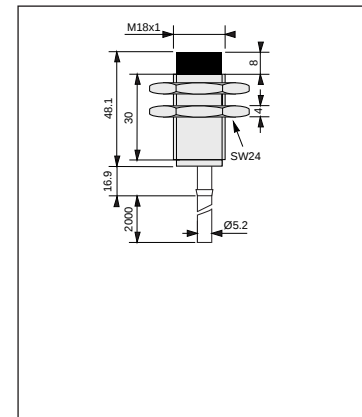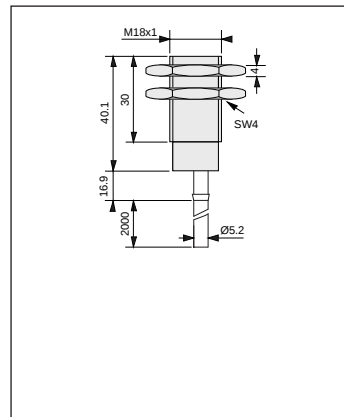

|                                         |
|-----------------------------------------|
| <b>Form</b>                             |
| <b>Nominal sensing distance Sn (mm)</b> |
| <b>Housing</b>                          |
| Tightening torque (Nm)                  |
| Termination                             |

|                                      |
|--------------------------------------|
| M18 screened                         |
| 5                                    |
| Stainless steel                      |
| 2 m PVC cable *M12 plastic connector |

|                                      |
|--------------------------------------|
| M18 non-screened                     |
| 5                                    |
| Stainless steel                      |
| 2 m PVC cable *M12 plastic connector |

### Part numbers

#### 2-wire DC NAMUR types

|                                                   |
|---------------------------------------------------|
| NC                                                |
| Min/max. supply voltage                           |
| ON state current with V supply=8.2 V              |
| OFF state current with V supply=8.2 V             |
| Current at specified Sn with V supply=8.2 V       |
| Max. current (Ia)                                 |
| Switching frequency (F)                           |
| Conductor cross-section / External cable diameter |

|                                  |                    |
|----------------------------------|--------------------|
| <b>84 717 755</b>                | <b>*84 717 767</b> |
| 6 to 35 V $\pm$                  |                    |
| < 1 mA                           |                    |
| > 2.2 mA                         |                    |
| 1.55 mA                          |                    |
| 9.35 mA                          |                    |
| 500 Hz                           |                    |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |                    |

|                                  |                    |
|----------------------------------|--------------------|
| <b>84 717 757</b>                | <b>*84 717 769</b> |
| 6 to 35 V $\pm$                  |                    |
| < 1 mA                           |                    |
| > 2.2 mA                         |                    |
| 1.55 mA                          |                    |
| 9.35 mA                          |                    |
| 200 Hz                           |                    |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm |                    |

### Accessories


|                                       |
|---------------------------------------|
| Mounting flanges, see page 3/102      |
| Connectors, see pages 3/100 to 3/101. |

### Other information


Special adaptations are available depending on the type of request and quantity required. Eg. cable length, tube length, connector type, etc.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

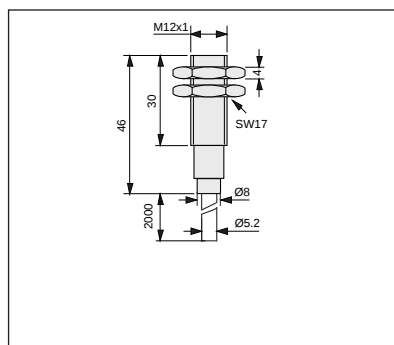

M12 screened  
2  
Stainless steel  
2 m PVC cable \*M12 plastic connector

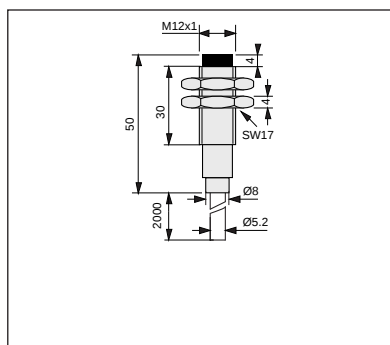


M12 non-screened  
4  
Stainless steel  
2 m PVC cable \*M12 plastic connector

1


| 84 717 731                       | *84 717 743                      |
|----------------------------------|----------------------------------|
| 6 to 35 V $\text{---}$           | 6 to 35 V $\text{---}$           |
| < 1 mA                           | < 1 mA                           |
| > 2.2 mA                         | > 2.2 mA                         |
| 1.55 mA                          | 1.55 mA                          |
| 9.35 mA                          | 9.35 mA                          |
| 800 Hz                           | 800 Hz                           |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

| 84 717 733                       | *84 717 745                      |
|----------------------------------|----------------------------------|
| 6 to 35 V $\text{---}$           | 6 to 35 V $\text{---}$           |
| < 1 mA                           | < 1 mA                           |
| > 2.2 mA                         | > 2.2 mA                         |
| 1.55 mA                          | 1.55 mA                          |
| 9.35 mA                          | 9.35 mA                          |
| 800 Hz                           | 800 Hz                           |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

3

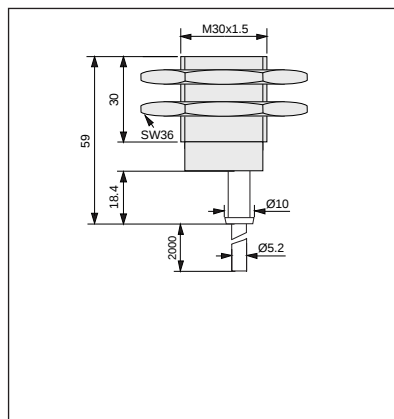

M30 screened  
10  
Stainless steel  
2 m PVC cable \*M12 plastic connector

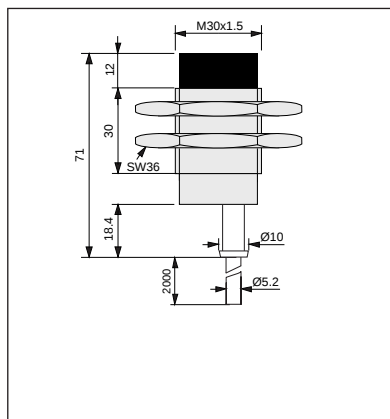

M30 non-screened  
15  
Stainless steel  
2 m PVC cable \*M12 plastic connector

1

| 84 717 779                       | *84 717 791                      |
|----------------------------------|----------------------------------|
| 6 to 35 V $\text{---}$           | 6 to 35 V $\text{---}$           |
| < 1 mA                           | < 1 mA                           |
| > 2.2 mA                         | > 2.2 mA                         |
| 1.55 mA                          | 1.55 mA                          |
| 9.35 mA                          | 9.35 mA                          |
| 300 Hz                           | 300 Hz                           |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

| 84 717 781                       | *84 717 793                      |
|----------------------------------|----------------------------------|
| 6 to 35 V $\text{---}$           | 6 to 35 V $\text{---}$           |
| < 1 mA                           | < 1 mA                           |
| > 2.2 mA                         | > 2.2 mA                         |
| 1.55 mA                          | 1.55 mA                          |
| 9.35 mA                          | 9.35 mA                          |
| 100 Hz                           | 100 Hz                           |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

#### To order, specify:

Standard products,  
non stocked

**1** Part number

Example : Inductive proximity detector M8 84 717 707

Products and specifications subject to change without notice.

# Inductive Proximity Detectors for Severe Environments

- Inductive detector for severe environments
- Operating range : - 55 °C to + 105 °C
- Conforms with standards :
  - EUROCAE ED 14 C
  - MIL STD

Nominal sensing distance  $S_n$  (mm)

Material Housing  
Face

Termination

## Part numbers

### 3-wire DC types

NPN NO   
NC 

Min/max. supply voltage

Switching current

Max. off-load current consumption


Residual voltage at 25 °C

Switching frequency

Termination

Sealing (MIL - S - 8 805)

Protection against mis-connections of any type  
against accidental voltage surges of short duration  
against indirect lightning effects  
against radio-electrical interference

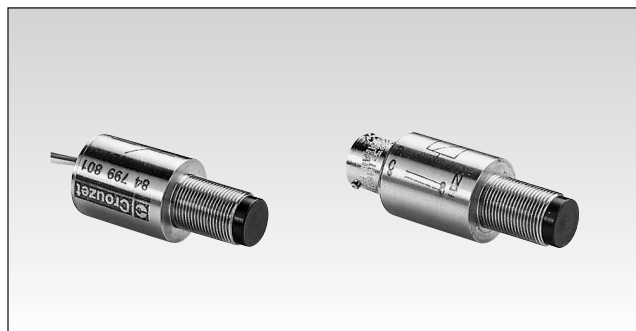

2.5 ±0.25

Stainless steel

Rilsan

1m wire

2.5 ±0.25

Stainless steel

Rilsan

Connector

1

84 799 801

84 799 802

12 to 32 V ---

1 to 250 mA resistive

8 mA

2V 250 mA

250 Hz

3 x 0.6 mm<sup>2</sup> wires

Dust

yes

yes

yes

yes

84 799 803

84 799 804

12 to 32 V ---

1 to 250 mA resistive

8 mA

2V 250 mA

250 Hz

Type ASN E0053 N8133PN

Immersion in water

yes

yes

yes


yes

## Inductive Proximity Detectors NAMUR (Acc. DIN 19234)

### Operating principle


NAMUR sensors (DIN 19234) are 2-wire DC proximity detectors with no trip or output amplification stage. They are polarised and their internal impedance alters in proportion to the distance between the sensor face and the target. NAMUR sensors are designed for use with an external amplifier which converts the variations in impedance into digital signals.

### Output characteristics

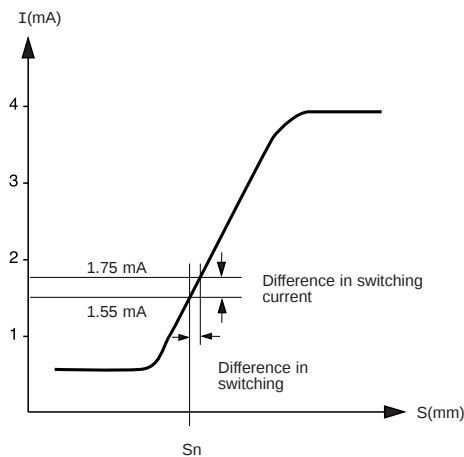


### Wiring diagrams

Without external amplifier

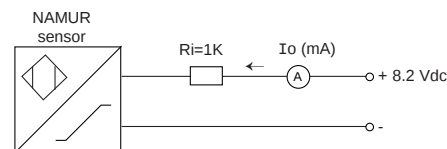

With external amplifier

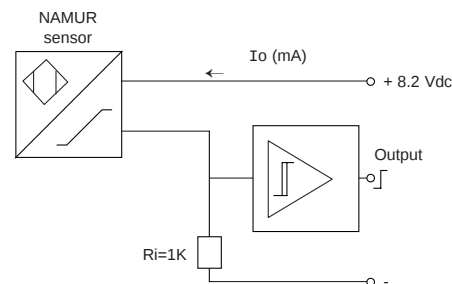

The nominal sensing range ( $S_n$ ) specified corresponds to a current consumption of 1.55 mA with a supply voltage of 8.2 V to the circuit and  $R_i = 1$  Kohm. The table below gives the level of current consumption at nominal sensing range ( $S_n$ ) for other supply voltage and resistance values.

| Supply voltage<br>V (Vdc) | Resistance $R_i$<br>(Kohm) | Current consumption<br>I at $S_n$<br>(mA) |
|---------------------------|----------------------------|-------------------------------------------|
| 5                         |                            |                                           |
| 12                        | 0.39                       | 0.7                                       |
| 15                        | 1.8                        | 2.3                                       |
| 24                        | 2.2                        | 2.9                                       |
|                           | 3.9                        | 3.8                                       |

To order, specify :

Standard products,  
non stocked

1 Part number

Example : Inductive proximity detector  
84 799 801

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Capacitive Proximity Detectors - M18 - M30


- Smooth body : ideally suited to agricultural applications

## M18

- Sensing distance adjustable from 2 mm to 10 mm

## M30

- Fixed sensing distance of 9 mm
- Application  
Level detection : liquids, granulates, paper, ink, etc.

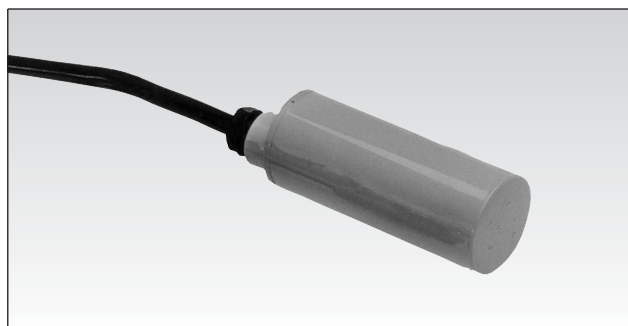

## Form

Nominal sensing distance Sn (mm)

## Housing

Tightening torque (Nm)

Termination

M18 non-screened

2 to 10 mm adjustable

Plastic

2 m PVC cable

Ø30 non-screened

9 (fixed)

Plastic

2 m PVC cable

## Part numbers

### 3-wire DC types

PNP NO

NPN NO

Min/max. supply voltage

Max. load current (Ia)

Residual open-state current (Ir) / Own consumption (Io)

Voltage drop in closed state (Ud) / Max. ripple factor (Vr)

Switching frequency (F) / Delay on pick-up (td)

LED indicator

Protection against permanent short-circuits and overloads

Protection against mis-connections of any type

Conductor cross-section / External cable diameter

84 718 506

84 718 508

10 to 40 V  $\pm$

200 mA

< 0.05 mA / < 10 mA

< 2.8 V  $\pm$  / < 10 %

25 Hz / < 100 ms

yes

yes

yes

3 x 0.25 mm<sup>2</sup> / 5.2 mm

## Part numbers

### 2-wire AC types

Polarity NO

reversible NC

Min/max. supply voltage

Min/max. load current (Ia)

Residual open-state current (Ir)

Voltage drop in closed state (Ud)

Switching frequency (F) / Delay on pick-up (td)

LED indicator

Conductor cross-section

84 718 510

84 718 511

20 to 265 V  $\sim$

10 to 500 mA

< 2.6 mA

< 10 V

10 Hz / < 350 ms

yes

yes

2 x 0.5 mm<sup>2</sup> / 5.2 mm

84 718 588

84 718 589

90 to 240 V  $\sim$

20 to 150 mA

< 10 mA

< 11 V

5 Hz /

no

2 x 0.75 mm<sup>2</sup> / 5.2 mm



## Accessories

Mounting flanges, see page 3/102

## Dimensions (mm)

84 718 506 / 508  
84 718 510 / 511

84 718 588 / 589

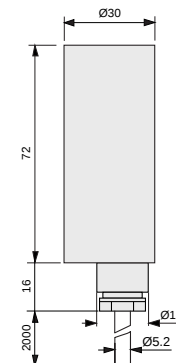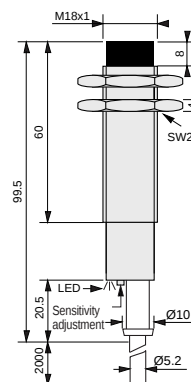

## Other information

Special adaptations are available depending on the type of request and quantity required.  
Eg. cable length.

## To order, specify:

Standard products

1

Part number  
Example : Capacitive proximity detector  
M18 84 718 506

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Capacitive Proximity Detectors - Flat Pack

- 4-wire NO and NC operation
- Easy to mount : only 2 M 3.5 screws required
- Ideal for packaging machine applications
- Inductive detection version available in same housing
- Supplied with adjustment screwdriver

## Form

**Nominal sensing distance  $S_n$  (mm)** non-screened mounting :  
screened mounting :

## Housing

Tightening torque (Nm)

Termination

## Part numbers

### 4-wire DC types

PNP NO + NC  +   
NPN NO + NC  + 

Min/max. supply voltage

Max. load current ( $I_a$ )

Residual open-state current ( $I_r$ ) / Own consumption ( $I_o$ )

Voltage drop in closed state ( $U_d$ ) / Max. ripple factor ( $V_r$ )

Switching frequency (F) / Delay on pick-up ( $t_d$ )

LED indicator

Protection against permanent short-circuits and overloads



Protection against mis-connections of any type

Conductor cross-section / External cable diameter

## Dimensions (mm)

84 718 572 / 574

84 718 578 / 580

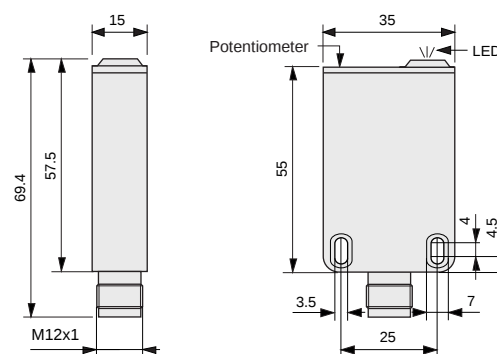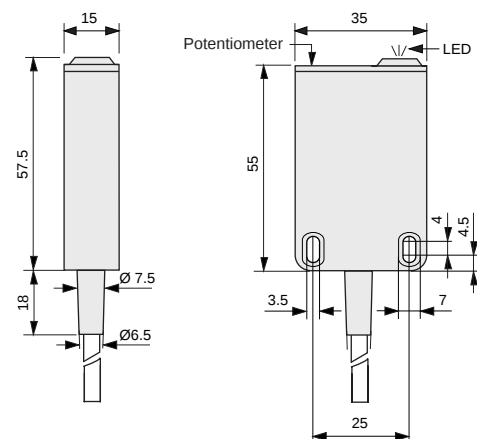

55 x 35 non-screened / screened

2 - 25 mm adjustable

2 - 16 mm adjustable

Plastic

2 m PVC cable

55 x 35 non-screened / screened

2 - 25 mm adjustable

2 - 16 mm adjustable

Plastic

M12 connector

1

84 718 572

84 718 574

10 to 40 V  $\equiv$

200 mA

< 0.05 mA / < 15 mA

< 3 V  $\equiv$  / < 10 %

100 Hz / < 300 ms

yes

yes

yes

4 x 0.35 mm<sup>2</sup> / 6.8 mm

84 718 578

84 718 580

10 to 40 V  $\equiv$

200 mA

< 0.05 mA / < 15 mA

< 3 V  $\equiv$  / < 10 %

100 Hz / < 300 ms

yes

yes

yes

yes

## Other information

Special adaptations are available depending on the type of request and quantity required.  
Eg. cable length.

## To order, specify:

Standard products

Standard products,  
non stocked

1

Part number


Example : Capacitive proximity detector  
Flat pack 84 718 572

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Capacitive Proximity Detectors - M30

- Programmable model
- Selection via switch
- NO and NC output
- Supplied with adjustment screwdriver
- EMC immunity : 10 V/ m

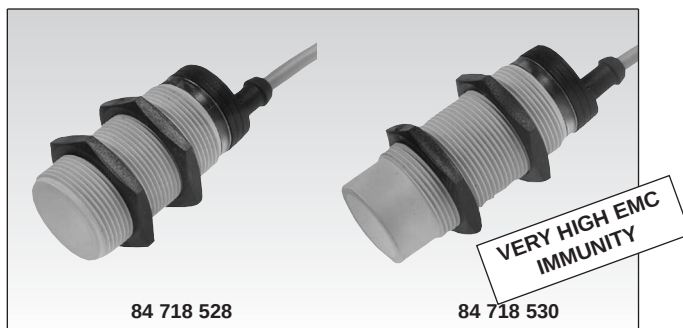

|                                                      |
|------------------------------------------------------|
| <b>Form</b>                                          |
| <b>Nominal sensing distance Sn (mm) - adjustable</b> |
| <b>Housing</b>                                       |
| Tightening torque (Nm)                               |
| Termination                                          |

|                       |                       |
|-----------------------|-----------------------|
| M30 screened          | M30 non-screened      |
| 2 to 16 mm adjustable | 3 to 25 mm adjustable |
| Plastic               | Plastic               |
| 2 m PVC cable         | 2 m PVC cable         |

## Part numbers 1

|                                                             |         |                                                                                   |                                                                                   |
|-------------------------------------------------------------|---------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>4-wire DC types</b>                                      |         |                                                                                   |                                                                                   |
| PNP                                                         | NO + NC |  |  |
| NPN                                                         | NO + NC |  |  |
| Min/max. supply voltage                                     |         |                                                                                   |                                                                                   |
| Max. load current (Ia)                                      |         |                                                                                   |                                                                                   |
| Residual open-state current (Ir) / Own consumption (Io)     |         |                                                                                   |                                                                                   |
| Voltage drop in closed state (Ud) / Max. ripple factor (Vr) |         |                                                                                   |                                                                                   |
| Switching frequency (F) / Delay on pick-up (td)             |         |                                                                                   |                                                                                   |
| Annular LED                                                 |         |                                                                                   |                                                                                   |
| Protection against permanent short-circuits and overloads   |         |                                                                                   |                                                                                   |
| Protection against mis-connections of any type              |         |                                                                                   |                                                                                   |
| Conductor cross-section / External cable diameter           |         |                                                                                   |                                                                                   |

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| <b>84 718 524</b>                 | <b>84 718 530</b>                 |
| <b>84 718 526</b>                 | <b>84 718 532</b>                 |
| 10 to 40 V $\text{---}$           | 10 to 40 V $\text{---}$           |
| 200 mA                            | 200 mA                            |
| 0.05 mA / 10 mA                   | 0.05 mA / 10 mA                   |
| 2.5 V / < 10 %                    | 2.5 V / < 10 %                    |
| 100 Hz / < 100 ms                 | 100 Hz / < 100 ms                 |
| yes                               | yes                               |
| yes                               | yes                               |
| yes                               | yes                               |
| 4 x 0.34 mm <sup>2</sup> / 6.8 mm | 4 x 0.34 mm <sup>2</sup> / 6.8 mm |

## Part numbers 1


|                                                 |                                                                                                                                                                        |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>2-wire AC types</b>                          |                                                                                                                                                                        |
| <b>Polarity reversible NO or NC</b>             |  or  |
| <b>programmable</b>                             |                                                                                                                                                                        |
| Min/max. supply voltage                         |                                                                                                                                                                        |
| Min/max. load current (Ia)                      |                                                                                                                                                                        |
| Residual open-state current (Ir)                |                                                                                                                                                                        |
| Voltage drop in closed state (Ud)               |                                                                                                                                                                        |
| Switching frequency (F) / Delay on pick-up (td) |                                                                                                                                                                        |
| Annular LED                                     |                                                                                                                                                                        |

|                                  |                                  |
|----------------------------------|----------------------------------|
| <b>84 718 528</b>                | <b>84 718 534</b>                |
| 20 to 265 V $\sim$               | 20 to 265 V $\sim$               |
| 10 to 500 mA                     | 10 to 500 mA                     |
| 2.5 mA @ 240 V $\sim$            | 2.5 mA @ 240 V $\sim$            |
| 10 V $\sim$                      | 10 V $\sim$                      |
| 25 Hz / < 100 ms                 | 25 Hz / < 100 ms                 |
| yes                              | yes                              |
| 2 x 0.5 mm <sup>2</sup> / 5.2 mm | 2 x 0.5 mm <sup>2</sup> / 5.2 mm |

## Accessories

Mounting flanges, see page 3/102

### Dimensions (mm)




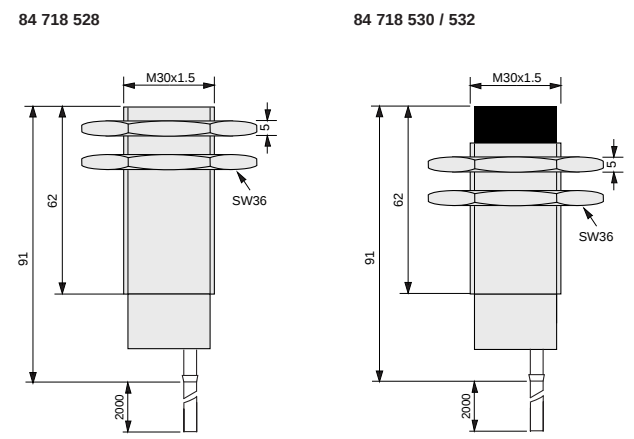


| Other information                                                                                              | To order, specify :                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Special adaptations are available depending on the type of request and quantity required.<br>Eg. cable length. | <div> <div></div> <div>Standard products</div> </div> <div> <div></div> <div>Standard products, non stocked</div> </div> <div> <div>1</div> <div>Part number</div> </div> <div> <div>Example : Capacitive proximity detector M30 84 718 524</div> </div> |

Products and specifications subject to change without notice.

# Connectors for V3 and M8 Detectors (with M8 Connector)





## M8 plug-in versions



|                     |                  |                                                                             |                |                                                              |                                                              |
|---------------------|------------------|-----------------------------------------------------------------------------|----------------|--------------------------------------------------------------|--------------------------------------------------------------|
| Presentation        |                  | Straight, no LED                                                            | Angled, no LED | Angled, 2 LEDs (PNP)                                         | Angled, 2 LEDs (NPN)                                         |
| Number of contacts  |                  | 3                                                                           | 3              | 3                                                            | 3                                                            |
| <b>Part numbers</b> |                  |                                                                             |                |                                                              |                                                              |
| Length 2 m          | PVC              | 25 552 953                                                                  | 25 552 955     | 25 552 957                                                   | 25 552 958                                                   |
| Length 5 m          | PVC              | 25 552 954                                                                  | 25 552 956     | —                                                            | —                                                            |
| Compatibility       |                  | V3 and M8 detectors with M8 connector and PNP - NO/NC or NPN - NO/NC output |                | V3 and M8 detectors with M8 connector and PNP - NO/NC output | V3 and M8 detectors with M8 connector and NPN - NO/NC output |
| Display via LED     | Power supply     | —                                                                           | —              | Green                                                        | Green                                                        |
|                     | Output activated | —                                                                           | —              | Yellow                                                       | Yellow                                                       |

1

## M8 screw-in versions




|                     |                  |                                                                      |                |                                                       |                                                       |
|---------------------|------------------|----------------------------------------------------------------------|----------------|-------------------------------------------------------|-------------------------------------------------------|
| Presentation        |                  | Straight, no LED                                                     | Angled, no LED | Angled, 2 LEDs (PNP)                                  | Angled, 2 LEDs (NPN)                                  |
| Number of contacts  |                  | 3                                                                    | 3              | 3                                                     | 3                                                     |
| <b>Part numbers</b> |                  |                                                                      |                |                                                       |                                                       |
| Length 2 m          | PVC              | 25 552 959                                                           | 25 552 961     | 25 552 963                                            | 25 552 965                                            |
| Length 5 m          | PVC              | 25 552 960                                                           | 25 552 962     | 25 552 964                                            | 25 552 966                                            |
| Compatibility       |                  | M8 detectors with M8 connector and PNP - NO/NC or NPN - NO/NC output |                | M8 detectors with M8 connector and PNP - NO/NC output | M8 detectors with M8 connector and NPN - NO/NC output |
| Display via LED     | Power supply     | —                                                                    | —              | Green                                                 | Green                                                 |
|                     | Output activated | —                                                                    | —              | Yellow                                                | Yellow                                                |

1

## General characteristics

|                                        |                          |                          |
|----------------------------------------|--------------------------|--------------------------|
| Sealing                                | Plug-in versions         | Screw-in versions        |
| Conductor cross-section                | IP 65                    | IP 68                    |
| Limit temperature                      | 3 x 0.25 mm <sup>2</sup> | 3 x 0.25 mm <sup>2</sup> |
| Min/max supply for connectors with LED | -5 °C to + 70 °C         | -5 °C to + 70 °C         |
|                                        | 10 to 30 V ~             | 10 to 30 V ~             |

## Connector pin-out




- 1 - brown (+)
- 3 - blue (-)
- 4 - black (NO/NC output)

## Connections


### 3-wire DC

3-wire ~ PNP

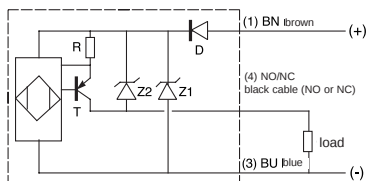

PNP output : load connected to negative supply

3-wire ~ NPN

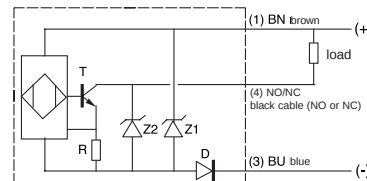

NPN output : load connected to positive supply

## To order, specify :

Standard products

1

Part number





Example : Connector, plug-in version M8 25 552 953





Standard products, non stocked

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Connectors for Detectors M8 - M12 - M18 - M30 and 35 x 55 mm (with Connector M12)

|                         |  |                                                                                                               |                                                                                   |                                                                                                                        |                                                                                    |
|-------------------------|--|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                         |  |                               |  |                                      |  |
| Presentation            |  | Straight, no LED                                                                                              |                                                                                   | Angled, 2 LEDs (PNP)                                                                                                   |                                                                                    |
| Number of contacts      |  | 3                                                                                                             |                                                                                   | 3                                                                                                                      |                                                                                    |
| Part numbers            |  |                                                                                                               |                                                                                   |                                                                                                                        |                                                                                    |
| Length 2 m PVC          |  | 25 552 967                                                                                                    | 25 552 969                                                                        | 25 552 971                                                                                                             | 25 552 973                                                                         |
| Length 5 m PVC          |  | 25 552 968                                                                                                    | 25 552 970                                                                        | 25 552 972                                                                                                             | 25 552 974                                                                         |
| Compatibility           |  | 3-wire ∴ detectors with M12 connector and NO output<br>2-wire ∴ detectors with M12 connector and NO/NC output |                                                                                   | 3-wire ∴ detectors with M12 connector and PNP - NO output<br>3-wire ∴ detectors with M12 connector and NPN - NO output |                                                                                    |
| Double key for AC model |  |                                                                                                               |                                                                                   |                                                                                                                        |                                                                                    |
| Length 2 m PVC          |  | 25 552 989                                                                                                    | 25 552 991                                                                        |                                                                                                                        |                                                                                    |
| Length 5 m PVC          |  | 25 552 990                                                                                                    | 25 552 992                                                                        |                                                                                                                        |                                                                                    |
| Compatibility           |  | 2-wire detectors ∼ polarity reversible with M12 connector                                                     |                                                                                   |                                                                                                                        |                                                                                    |
| Display via LED         |  | — — — —                                                                                                       |                                                                                   | Green                                                                                                                  |                                                                                    |
| Power supply            |  | — — — —                                                                                                       |                                                                                   | Yellow                                                                                                                 |                                                                                    |
| Output activated        |  | — — — —                                                                                                       |                                                                                   | Green                                                                                                                  |                                                                                    |
|                         |  | — — — —                                                                                                       |                                                                                   | Yellow                                                                                                                 |                                                                                    |


|                     |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|---------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                     |  |  |  |  |
|                     | M12                                                                               | M12                                                                                | for wiring                                                                          | for wiring                                                                          |
| Presentation        | Straight, no LED                                                                  | Angled, no LED                                                                     | Straight, no LED                                                                    | Angled, no LED                                                                      |
| Number of contacts  | 4                                                                                 | 4                                                                                  | 4                                                                                   | 4                                                                                   |
| <b>Part numbers</b> |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Screw terminal      | —                                                                                 | —                                                                                  | 25 552 983                                                                          | 25 552 984                                                                          |
| Length 2 m PVC      | 25 552 975                                                                        | 25 552 979                                                                         | —                                                                                   | —                                                                                   |
| Length 5 m PVC      | 25 552 976                                                                        | 25 552 980                                                                         | —                                                                                   | —                                                                                   |
| Length 2 m PUR      | 25 552 977                                                                        | 25 552 981                                                                         | —                                                                                   | —                                                                                   |
| Length 5 m PUR      | 25 552 978                                                                        | 25 552 982                                                                         | —                                                                                   | —                                                                                   |
| Compatibility       | Detectors with M12 connector NO, NC or NO and NC output                           |                                                                                    |                                                                                     |                                                                                     |

## General characteristics


|                                        |                                                      |
|----------------------------------------|------------------------------------------------------|
| Sealing                                | IP 68 (IP 67 versions for wiring)                    |
| Conductor cross-section                | 3 x 0.34 mm <sup>2</sup> or 4 x 0.34 mm <sup>2</sup> |
| Limit temperature                      | -5 °C to +70 °C (PUR -5 °C to +90 °C)                |
| Min/max supply for connectors with LED | 10 to 30 V $\sim$                                    |

## Connector pin-out


Version with 3 contacts :  
for  $\sim$  detector



Version with 4 contacts :  
for  $\sim$  detector



M12 double key version :  
for  $\sim$  detector




## Connections

### 2-wire DC

Polarity reversible


2-wire  $\sim$

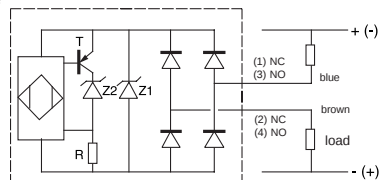

### 2-wire AC

Polarity reversible

2-wire  $\sim$

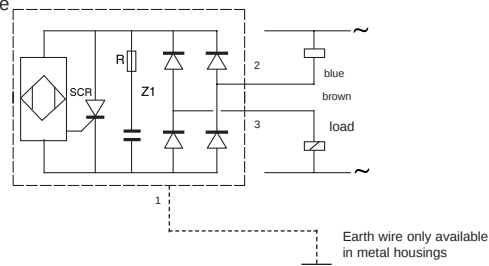

## To order, specify :

Standard products

**1** Part number


Example : Connector for M12 detector - 25 552 967

Standard products,  
non stocked

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Mounting Flanges for Inductive Proximity Detectors

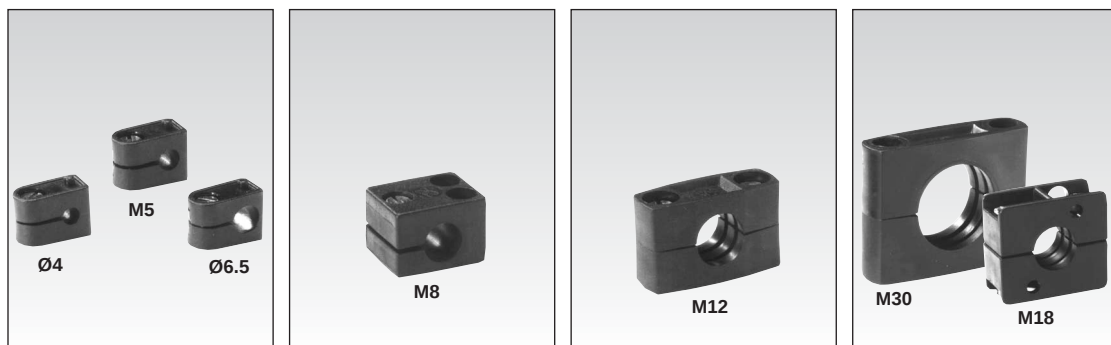

## Part numbers


Mounting flange

|       |            |            |            |            |
|-------|------------|------------|------------|------------|
| Ø 4   | 26 546 820 |            |            |            |
| M5    | 26 546 821 |            |            |            |
| Ø 6.5 | 26 546 822 |            |            |            |
| M8    |            | 26 546 823 |            |            |
| M12   |            |            | 26 546 824 |            |
| M18   |            |            |            | 26 546 825 |
| M30   |            |            |            | 26 546 826 |


1

## Dimensions


Flange for Ø4 - M5 - Ø6.5




Flange for M8



Flange for M12 and M30

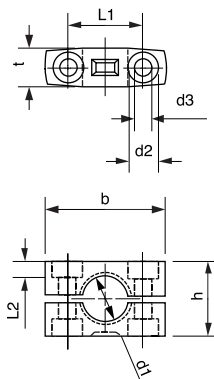

Flange for M18

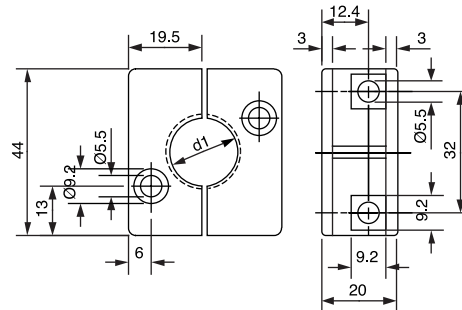

| d1   | d2  | d3  | L1  | L2  | b  | h    | t  |
|------|-----|-----|-----|-----|----|------|----|
| M 8  | 6.0 | 3.2 | 7.5 | 3.3 | 20 | 14   | 16 |
| M12  | 8   | 4.5 | 22  | 4.5 | 32 | 20   | 12 |
| M 18 | 9.2 | 5.5 | 32  | —   | 44 | 39   | 20 |
| M 30 | 10  | 6   | 44  | 7.5 | 60 | 48.5 | 17 |

## To order, specify :

Standard products


1

Part number

Example : Mounting flange Ø 4 - 26 546 820

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

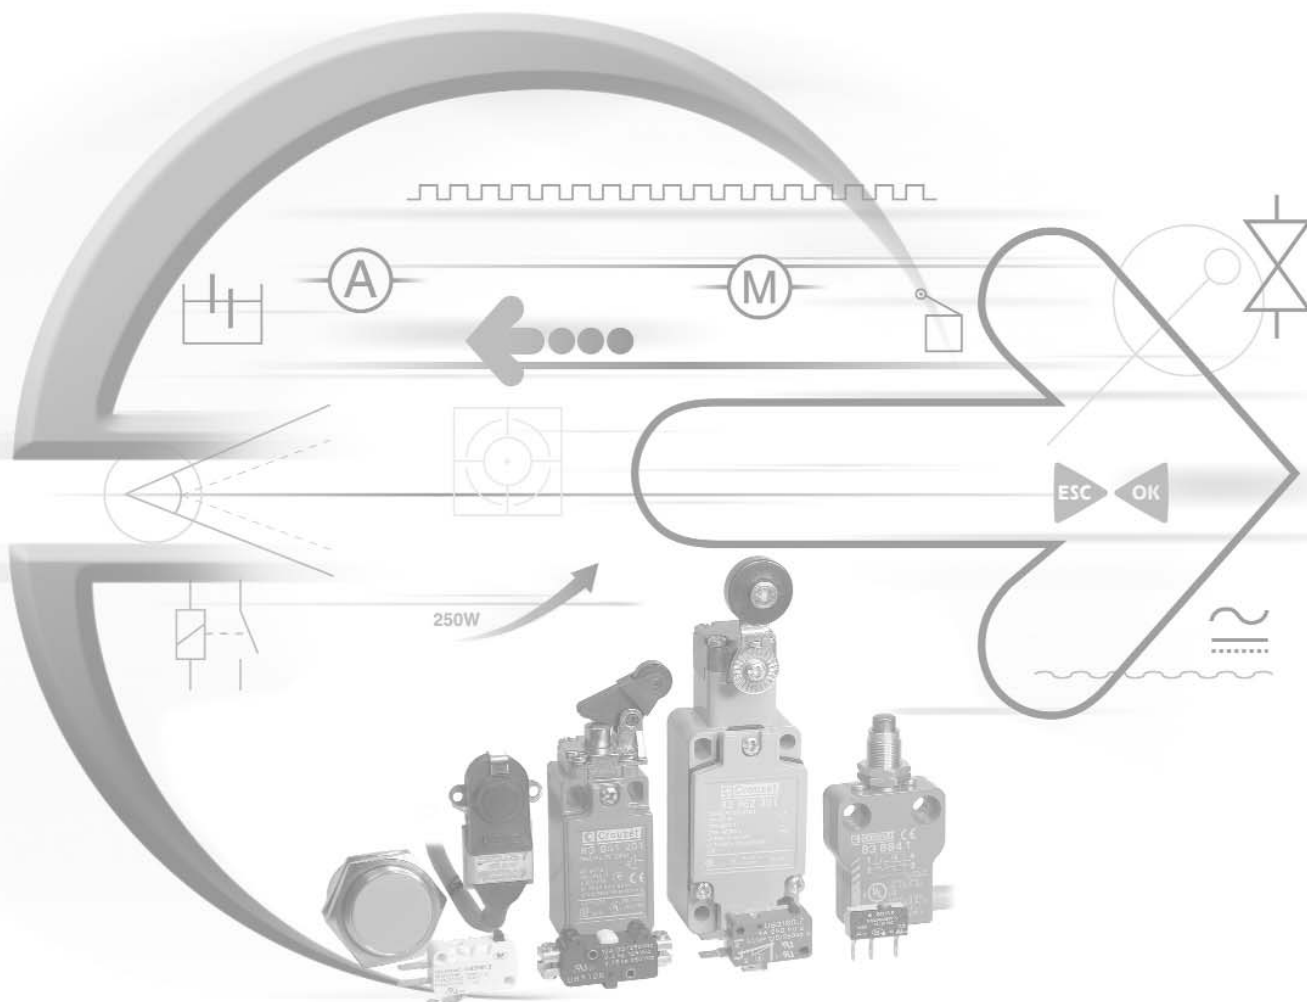

## Technical References



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

These basic principles apply to all our precision switches. The specific characteristics of each model are given in more detail in the relevant production sections.


## Introduction

Our switches are high-precision, snap-action switches and these are a few of the key features which distinguish our switches:

- High ratings with small dimensions
- Very short travels
- Low operating forces
- Highly dependable force and travel values
- Long life
- Large range of actuators for easy adaptation to the most varied applications

## Switch construction

### Single-pole changeover switch (i.e. 83 161)

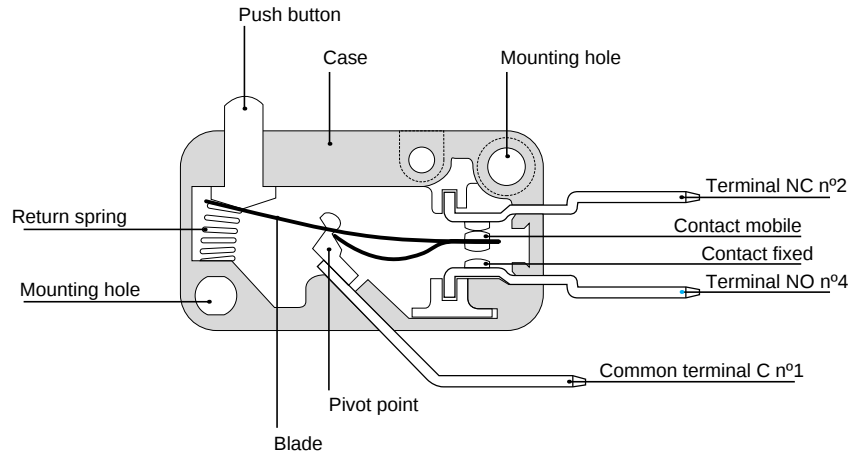

#### Electrical function SPDT (C)




#### Normally closed (NC)



#### Normally open (NO)



### Double-pole changeover switch (i.e. 83 132 0)

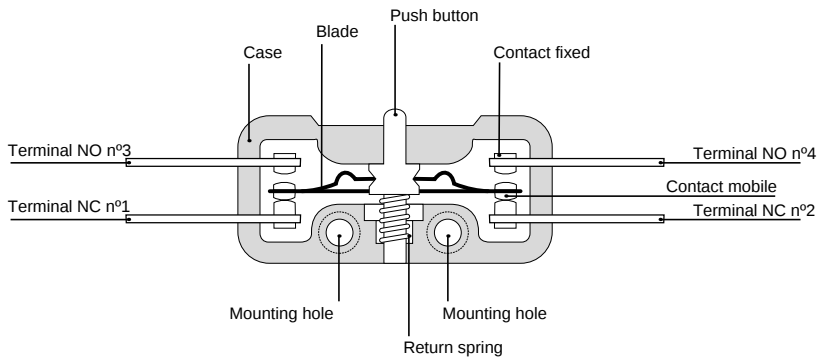

#### Electrical function SPDT (C)



#### Normally closed (NC)



#### Normally open (NO)



The NO and NC circuits must both be of the same polarity.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Mechanical characteristics



### Terminology - Forces - Positions - Travel

|                        |                                                                                                                                               |                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                            |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Position of pushbutton |                                                                                                                                               |                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                            |
| Electrical circuit     |                                                                                                                                               |                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                            |
| Forces                 |                                                                                                                                               | <b>OF Operating Force</b><br>Maximum force which must be applied to the operating device to displace the rest position RP to the tripping point TP. | <b>TTF Total travel force</b><br>Force required to displace the operating device from its rest position RP to its overtravel limit position. (We only specify this value if it is higher than the operating force. When not quoted, it is equal to or less than the operating force).<br><br><b>MOF Maximum overtravel force</b><br>The maximum force which can be applied to the operating device, without damaging it, in the end of travel position where it is in abutment internally or against the face of the case. | <b>RF Release force</b><br>Force to which the operating force must be reduced to allow the snap-action mechanism to return to its release position RLP.    |
| Positions              | <b>RP Rest position</b><br>Position of the operating device when no external mechanical force is applied. Also described as "height at rest". | <b>TP Tripping point</b><br>Position of the operating device relative to the fixing point (hole, face) at the moment when the microswitch trips.    | <b>OL Overtravel limit</b><br>Position of the operating device when an extreme force has moved it to the effective end of the available travel.                                                                                                                                                                                                                                                                                                                                                                            | <b>RLP Release position</b><br>Position of the operating device at the moment when the snap-action mechanism trips on its return to its original position. |
| Travel                 |                                                                                                                                               | <b>PT Pre-travel</b><br>Distance between the rest position RP and the tripping point TP.                                                            | <b>OT Overtravel</b><br>Distance between the tripping point TP and the overtravel limit OL.                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>DT Differential travel</b><br>Distance between the tripping point TP and the release position RLP.                                                      |

The reference point for the figures given for travel and forces is a point F situated on the button in the case of a plain microswitch, or, generally, 3 mm in from the end of a plain actuator. The reference point for the positions is one of the fixing holes, unless otherwise indicated.

### Graphs of forces vs. travel

Operating force (external) applied to the operating device

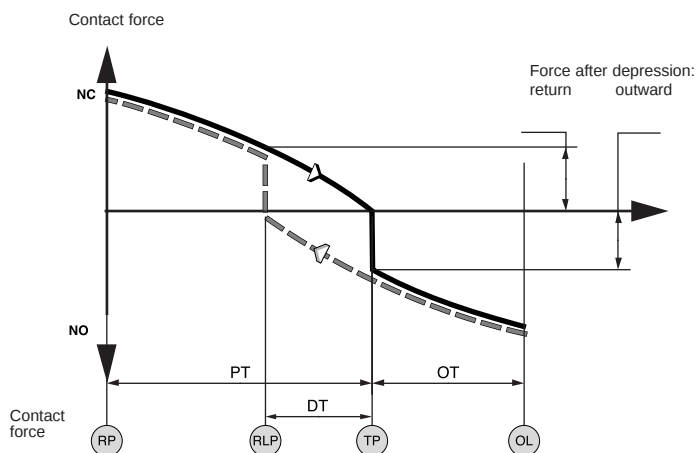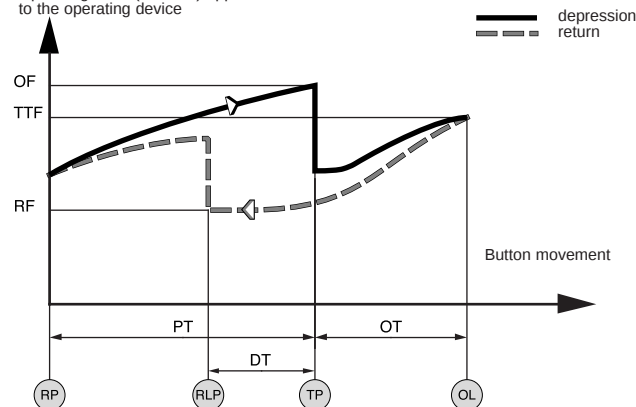


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Mechanical characteristics

### Changeover time

This is the time taken by the mobile contact when moving from one fixed contact to another until it becomes fully stable (contact bounce included). This time is a function of the contact gap, the mechanical characteristics of the snap action and the mass of the mobile element. However, thanks to the snap-action mechanisms employed, the time is largely independent of the speed of operation. It is normally less than 20 milliseconds (including bounce times of less than 5 ms).

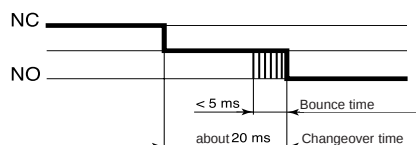

### Mechanical durability

This is an average value indicating the purely mechanical performance of a switch when not subject to any electrical load. It may be useful for evaluation purposes in cases where the power levels involved are very low and the electrical life is thus close to the mechanical life.

### Maximum speed and rate of operation

Our switches will work at speeds of operation varying over a very wide range : normally from 1 mm/min to 1 ms. The maximum rate of operation with a low electrical load may be as high as 10 operations/second.

### Mounting - Operation

- To conform to the leakage paths and air gaps in the standard EEC24 - EN/IEC 61058 - EN/IEC 60947:
- An insulation pad must be inserted between the switch and the fixing surface if the latter is metal.
- Manual operation of a metal actuator must only be carried out with the help of a secondary actuator made of insulating materials.
- The installer must ensure adequate protection against direct contact with the output terminals.

### Fixing - Screw torque

- Unless otherwise indicated in the mechanical characteristics table, the torque required for the fixing screws must conform to the following values :

| Ø of fixing screw    | 2  | 2.5 | 3  | 3.5 | 4   |
|----------------------|----|-----|----|-----|-----|
| Screw torque maximum | 25 | 35  | 60 | 100 | 150 |
| Screw torque minimum | 15 | 25  | 40 | 60  | 100 |

## Environmental conditions

### Resistance to shocks and vibrations

Resistance to impact and vibration depends on the mass of the moving parts and on the forces holding the contacts together.

Generally speaking, for a switch without an actuator :

- Vibration >10 G 10 at 500 Hz
- Impact > 50 G 11 ms 1/2 sine-wave

Further information on request.

### Ambient operating temperature

The maximum and minimum temperatures at which the mechanical and electrical characteristics of the switch will remain substantially unaltered.

### Degree of protection

Under the IEC 529 or NFC 20010 classification scheme, standards employ an IP code to define the degree or class of protection which electrical equipment provides against access to live components, the entry of solid foreign bodies and ingress of water.

| 1st numeral                                                             |                                                          |  |
|-------------------------------------------------------------------------|----------------------------------------------------------|--|
| Protection equipment provides against the entry of solid foreign bodies | Protection for persons against access to dangerous parts |  |
| 0 (not protected)                                                       | (not protected)                                          |  |
| 4 diameter $\geq 1$ mm                                                  | 1 mm Ø wire                                              |  |
| 5 protected against dust                                                | 1 mm Ø wire                                              |  |
| 6 sealed against dust                                                   | 1 mm Ø wire                                              |  |

| 2nd numeral                                            |  |
|--------------------------------------------------------|--|
| Protection equipment provides against ingress of water |  |
| 0 (not protected)                                      |  |
| 4 splashed water                                       |  |
| 5 hosed water                                          |  |
| 6 high-pressure hosed water                            |  |
| 7 temporary immersion                                  |  |
| 8 prolonged immersion                                  |  |

Under this classification, our switches come within the following categories :

- Plain switches = IP 00
- Protected switches = IP 40 with isolated connection
- Sealed switches = IP 66 or IP 67

## Dielectric characteristics

### Current rating


This is the current the switch is capable of making and breaking which forms the basis for the life tests.

### Thermal rating

This is the current the switch will withstand when not being operated, for a temperature rise of not more than 60 °C.

### Switch rating


AC voltages: see the current rating.  
With DC voltages the switch rating is very much dependent on the voltage, the contact gap (CG) and the nature of the load being switched. There is a risk of prolonged or indeed permanent arcing if the following limits are exceeded:

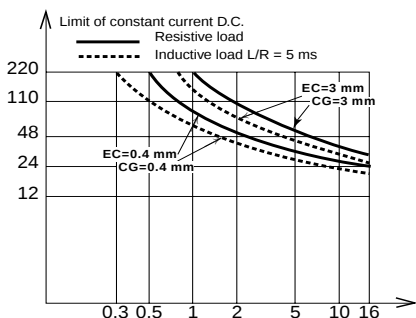

For special applications, please enquire.

### Operating curves

These indicate the electrical life of the switches, under standard conditions (20 °C, 1 cycle/2 seconds), by showing the number of switching operations which can be performed with given types of load.

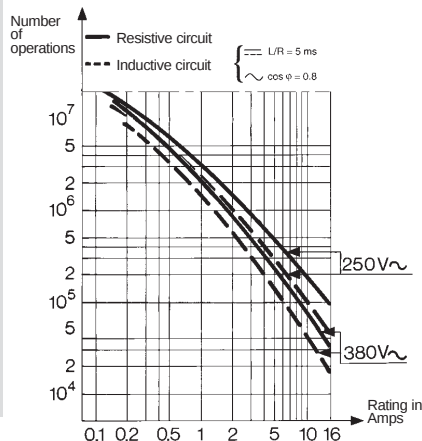


Products and specifications subject to change without notice.

## Circuit types




### Resistive circuit

For a circuit with alternating voltage, this is in phase with the current :  $\cos \phi = 1$ .





### Inductive circuit

A circuit of this type with direct current is characterised by a time constant.  
An inductive circuit, with alternating voltage, for example, incorporating a motor ( $\cos \phi < 1$ ) can cause current surges up to 6 times the normal current. For certain switches, we give electrical endurance curves with  $\frac{L}{R} = 5 \text{ ms}$  in DC and  $\cos \phi = 0.8$  in AC.




### Lamp and capacitance circuit

The currents at the time when the circuit is closed are very high in this case, being up to 10 times the nominal figure.




### Internal resistance

This consists of the intrinsic resistance (fixed) of the parts carrying current and the contact resistance (variable).  
Close to the tripping point and release position, the force holding the contacts together drops considerably and this may cause a rise in internal resistance.




### Insulation resistance

The insulation resistance of the switches is generally greater than 50,000 MΩ measured at 500 V DC.



### Dielectric strength

The dielectric strength of our switches is generally better than:  
- 1500 volts between live parts and earth  
- 1000 volts between contacts  
- 600 volts between contacts for switches whose contact gap is less than 0.3 mm.



## Contact materials

### Choice of contact material

To choose the best material for the contacts there are various factors to be considered:

- the current and voltages levels
- the type of load
- the number of operations
- the switching frequency
- the environmental conditions.

### Contacts for general-purpose use

Our switches are normally fitted with silver contacts. These are suitable for the majority of applications and provide the best compromise between electrical performance, thermal performance and life.

### Contacts for low-power circuits

$E < 20 \text{ V}$  and/or  $I < 100 \text{ mA}$

The contacts used in this case are plated with gold (or a gold alloy) for good reliability even in corrosive atmospheres.

### Contacts for special applications

We can supply special contacts suitable for particular applications, such as:

- Ag CdO contacts for very high drawn currents,
- Cross Bar gold-plated Ag Ni contacts which allow a very wide range of applications to be covered by a single type of switch.


## Electrical recommendations

### Inductive circuits

To increase the life of contacts and their DC rating, arcing on opening can be cut down by using the following circuits:



#### - for DC

Fast diode  $V_R > 5 \times V_{\text{nominal}}$   
 $I_{\text{nominal}} > 10 \times I_{\text{winding}}$





#### - for DC or AC

A - RC circuit across inductor  
 B - RC circuit across switch



$C \text{ (nF)} \sim 100 \times I_{\text{nominal}} \text{ (A)}$   
 $V_{\text{insulation}} > V_{\text{peak}}$   
 $R(\Omega) \sim \text{load resistance} (\Omega)$



C - Varistor circuit across load  
 D - Varistor circuit across switch  
 $V > V_{\text{peak supply}}$


$$E \text{ (J)} \geq \frac{P \text{ (V.A.)}}{100}$$

### Very low power circuits


In very low power circuits ( $I > 1 \text{ mA}$ ,  $V \leq 5 \text{ V}$ ), switching is highly sensitive to environmental conditions (the atmosphere, pollution).

If the supply is powerful enough, adding a passive resistor to increase the current broken by the switch to a few milliamps will substantially improve reliability of operation.

R - Load resistance  
 C - Very low current load



## Methods of actuation

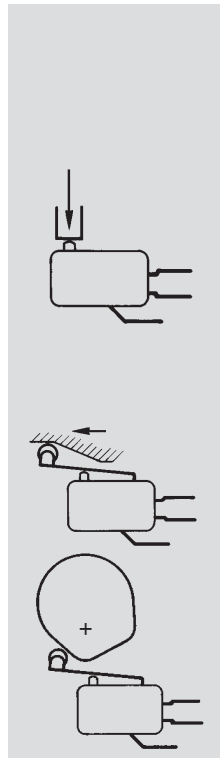

### Direct operation

Preferably, force should be directly applied to the device – the plunger – along its axis for operation. However, the majority of our microswitches will accept skewed operation provided the angle of application is not more than 45°.

The device used to apply the force must never hamper the travel of the plunger to the tripping point (TP). It must under all circumstances move the plunger through at least 0.5 times the overtravel (OT) quoted. Steps must also be taken to see that it does not cause the overtravel limit (OL) or maximum overtravel force (MOF) quoted to be overrun or exceeded.

### Operation by actuator

When operation is by a roller lever, force should preferably be applied in the direction shown on the left.

Where the movements involved are fast, the ramp should be so designed as to ensure that the operating device is not subjected to any violent impact or abrupt release.

## Quality

Quality is built into our switches from the initial design stage right through to the point where they are put into action at the customer's premises. All departments of the company are guided by the Quality Manual and the stipulations of the ISO 9000 international standard.

The location where the switches are manufactured (the la Plaine works at Valence) holds **ISO 9001** certification, guaranteeing a high standard of quality.

### Control procedures

Manufacturing quality of our switches is controlled systematically during assembly operations and on final completion. All our products are subjected to a final inspection, either at 100% on important characteristics, or according to the statistical sampling rules of French standards X 06-222 and X 06-023. The quality levels applied, for normal use such as defined in previous paragraphs are for the following defects, according to the standards :

- critical fault : NQA : 0.40
- major fault : NQA : 1
- minor fault : NQA : 2.5

At the customer's request, and for certain ranges of our products which must meet specific needs expressed in the specifications, it is always possible to adapt or create an inspection specification of a standard product.

## Standards - Approvals

Our switches are designed according to international recommendations (IEC), American standards (UL) and/or European standards (EN).


Proof of compliance with these standards and recommendations is demonstrated by:

- the manufacturer's declaration of conformity (drafted in accordance with the ISO/IEC 22 guidelines), or
- approval granted directly by an accredited body, or by application of the CCA (Cenelec Certification Agreement).

More detailed information on the approval for a particular type of microswitch can be obtained on request.

### The 83170 switch as an example

An 83 170 4 switch marked with the symbols for the European (according to CCA/MC12) and American approvals it holds.



## Rules and regulations

### EC directives

Our switches are compatible with European Community technical directive (Low Voltage) 73/23 and can be used within the framework of Machinery directive 83/392.

### Environmental protection

The modern concept of protection of the environment is an integral part of the manufacture of our switches, from product design through to packaging.



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Limit Switches – Technical Guide

## Introduction

What is meant by a "position detector" is any device which needs to be operated by a member which exerts a physical force, in view of :

- either the form which its operating device takes
- or the considerable force needed to operate it

The distinguishing features of position detectors are :

- their high electrical performance capability
- their excellent resistance to accidental impact
- good protection against splashed or dripping water
- a wide range of operating devices to allow the detectors to be adapted to a vast variety of mechanisms

## Construction

Our detectors are designed to conform to international IEC recommendations and/or European standards (EN). Proof that a detector conforms to these standards or recommendations takes the form of a conformity declaration made by the manufacturer (drafted as indicated in guidance document ISO/IEC 22 - EN 450-14). Characteristics in line with the general requirements of standards NFC 63140, IEC 947.5.1 and EN 60947.5.1.

- Leakage paths and air gaps : IEC 664.1 - NFC 20-040.

Our position detectors which comply with IEC 947.5.1 can be fitted to machine-tools and industrial machines complying with NFC 79130, IEC 204.1, EN60204 or VDE 113.

## Electrical characteristics

### Assigned working current (Ie):

- the current level adopted as a basis for the operating conditions quoted for a detector, and for the life tests on it.

### Thermal rating (Ith):

- the current the microswitch will withstand when not being operated electrically, for a temperature rise of not more than 60 °C.

### Assigned insulation voltage (Ui):

- the voltage adopted as a reference for the dielectric tests and leakage paths. It must be equal to or greater than the assigned working voltage.

### Categories of use (IEC 947.5.1):

- AC 15 for operating AC solenoids and electromagnets
- DC 13 for operating DC solenoids and electromagnets

### Contact element designation

#### (IEC 947.5.1):

- a letter and number which define the use category and the assigned working voltage and current
- For example, A 300 means : in category AC 15, a maximum working voltage of 300 V and 6 A at 120 V or 3 A at 240 V.

### Contact block electrical wiring diagram

Form Za



Both contacts have the same polarity

Form Zb



The 2 contacts are electrically isolated


### Positive break contact operation (IEC 947-5-1, chapter 3) ☺

For contacts used in safety applications, limit switches, emergency stop devices, assurance that opening has occurred is essential (see IEC 204, EN60204). After each attempt, contact opening is checked by an impulse voltage test (2500 V).

### Contact element :

- Snap action contact

This is characterized by tripping points and release points which cannot be confused. The speed at which the control devices moves is independent from the speed of the control device. This feature makes it possible to obtain satisfactory electrical performance even where the control device is moving at low speed.



- A : Total travel (TT) of the control device
- B : Pre-travel (PT) until the contact element opens
- C : Release travel until the contact element closes
- D : B-C = Differential travel
- E : Travel required to reach the positive opening point (POT)
- F : Travel required to reach the positive opening point (POT)

## Rules and regulations

### EC Directives

Our detectors conform to the EC Low Voltage Technical Directive 73/23/EEC and can be used in accordance with the specifications of the Machinery Directive 89/392/EEC.

## Environmental conditions

### Temperature limits

When they are used in the temperature range quoted, the mechanical and electrical characteristics of our position detectors will remain substantially unchanged. If you intend to use them outside this range, please consult us.

### Protective treatment

The treatment given to our position detectors is suitable in the vast majority of applications.

Parts made of steel are zinc-coated or painted according to their mechanical function. Further information is available on request.

This treatment allows our detectors to be used under the following temperature and humidity conditions :

|                     |    |    |    |
|---------------------|----|----|----|
| T °C                | 20 | 40 | 50 |
| Relative humidity % | 95 | 80 | 50 |

This treatment may thus be suitable for applications in tropical or equatorial climates where the equipment concerned is in an interior location sheltered from direct exposure to atmospheric conditions.

Other types of reinforced protection are possible for resistance to very severe environments.

Please enquire.

### Mounting requirements

Electric shock protection.

The user should observe the mounting instructions relating to the mode of protection against electric shocks defined in the IEC 536.1, EN 60204.1 - NFC 20030 standards :


Class I : earth circuit link. Protection via differential circuit-breaker.

Class II : double insulation.

Class III : very low safety voltage.


### Screw tightening torque :

|                         |               |             |
|-------------------------|---------------|-------------|
| 1 : Actuator tightening | 1.2 to 1.5 Nm |             |
|                         | Plastic body  | Metal body  |
| 2 : Head fixing screw   | 0.7 to 0.8 Nm | 0.8 to 1 Nm |
| 3 : Body fixing screw   | 0.7 to 0.8 Nm | 0.8 to 1 Nm |
| 4 : Fixing screw        | 2 to 2.5 Nm   |             |



### Adjustment of rotary heads with momentary action to right and left :

For series 83 850, 83 851, 83 861, 83 854, 83 855, 83 863

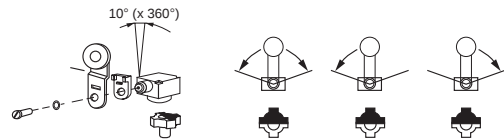

### Degree of protection

Under the IEC 529 or NFC 20010 classification scheme, standards employ an IP code to define the degree or class of protection which a position detector provides against access to live components and against the entry of solid foreign bodies and the entry of water.

#### 1<sup>st</sup> numeral

| Protection equipment provides against the entry of solid foreign bodies | Protection for persons against access to dangerous parts |
|-------------------------------------------------------------------------|----------------------------------------------------------|
| 0 (not protected)                                                       | (not protected)                                          |
| 4 diameter $\geq 1$ mm                                                  | 1 mm $\varnothing$ wire                                  |
| 5 protected against dust                                                | 1 mm $\varnothing$ wire                                  |
| 6 sealed against dust                                                   | 1 mm $\varnothing$ wire                                  |

#### 2<sup>nd</sup> numeral

| Protection equipment provides against the entry of water |
|----------------------------------------------------------|
| 0 (not protected)                                        |
| 4 splashed water                                         |
| 5 hosed water                                            |
| 6 high-pressure hosed water                              |
| 7 temporary immersion                                    |
| 8 prolonged immersion                                    |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Mechanical characteristics

### Terminology

#### Forces - Positions - Travel

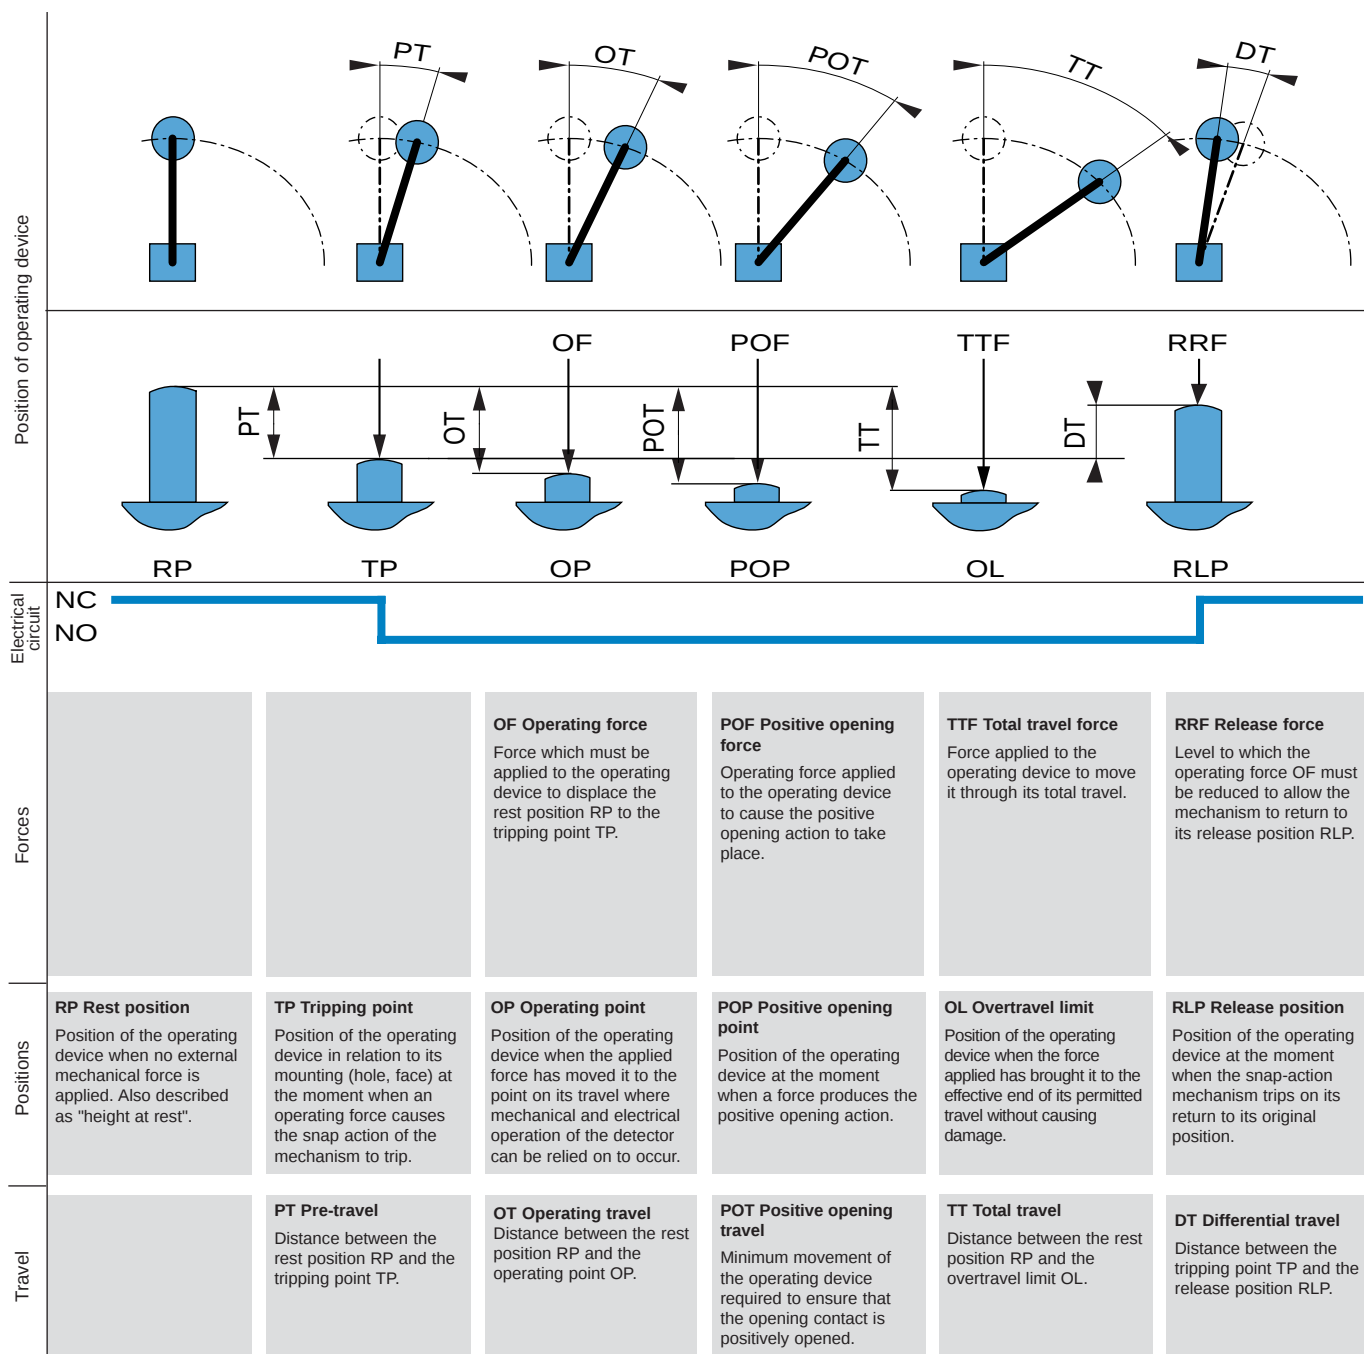

- Positive opening action : see IEC 947-5-1 chapter 3, § 2.2

**N.B. :** The max. and min. values quoted for each detector (min. operating force, max. total travel, etc.) are the maxima and minima users must allow for if they are to use our products under the proper conditions.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



---

## Key-operated safety interlock switch, plastic

### Without key locking



Switches with plastic body for use on light machinery, **without inertia**. For use in unstable environments where there is a risk of the guard opening accidentally (due to vibrations, if the guard is positioned at an angle, bouncing of the guard, etc). **The guard is kept closed by adding a door stopping mechanism.**

### With interlocking and locking of the key using an electromagnet

Devices in plastic cases for use on machines **with inertia**, or which require controlled opening of the guard.

The moving guard is locked by removing the voltage, or by applying voltage to the electromagnet.

A special tool can be used to unlock the guard manually, to ensure the safety of personnel carrying out maintenance operations on the machine, or if there is a malfunction.



---

## Key-operated safety interlock switch, metal

### Without key locking

Switches with metal body for use on machines **without inertia** in a **stable environment** where there is no risk of the guard opening accidentally (due to vibrations, if the guard is positioned at an angle, bouncing of the guard, etc)



### With interlocking and locking of the key using an electromagnet

Devices in metal cases for use on machines **without inertia**, or which require controlled opening of the guard.

The moving guard is locked by removing the voltage.

A key-operated lock can be used to unlock the guard manually, to ensure the safety of personnel carrying out maintenance operations on the machine, or if there is a malfunction.

These devices are fitted with 2 LEDs: one indicates the opening/closing of the guard, the other whether it is locked.



---

## Safety switch for hinged guards

### With angular or rotary movement head

Switches with plastic body and angled lever or rotary shaft.



They are designed for use on small industrial machines with compact doors, covers or **rotating housings**.

These ensure the safety of the operator by stopping the dangerous movement immediately the lever or rotary shaft reaches an angle of 5°.

These devices provide a solution for monitoring **rotary guards** with a small opening radius on machines without inertia.

They are particularly suitable for adapting existing machines to meet applicable standards, as they can be mounted on covers which are already installed, including those mounted imprecisely.

Mounting the switch increases the safety of the operator as it reduces the opening distance of the guard, and therefore the risk of reaching the danger zone.

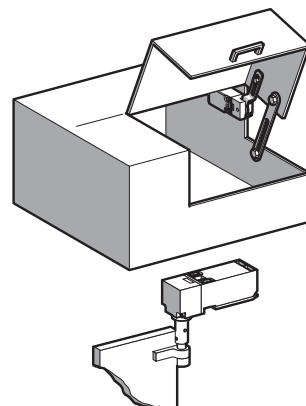


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Operating principles

Figure 1 illustrates the principle of an Inductive Proximity Detector (I.P.D.)

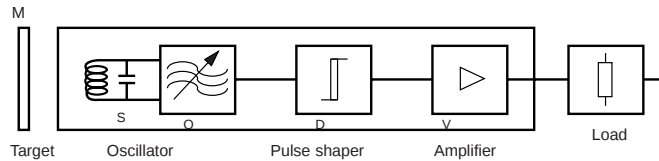

The I.P.D. signals the presence of a metal object "M" close to its sensing face.

It contains a high-frequency oscillator "O" whose oscillating circuit coil "S", located in a magnetic ferrite open on one side, forms the sensing face. An alternating magnetic field is created in front of this. On entering this field, any metal part "M" causes eddy currents, thus reducing the amplitude of oscillation. This reduced amplitude is converted by the pulse shaper "D" into an output signal amplified by "V".

## Operating characteristics:

**Sensing distance S:** Distance at which the target determines a change in the status of the output signal, as it approaches the sensing face.

**Nominal sensing distance Sn:** Conventional value used to describe the device. Does not take account of dispersion (due to manufacturing, temperature, voltage).


**Actual sensing distance Sr:** Actual value measured from constant parameters (temperature, voltage, installation conditions etc), which must be between 90 and 110 % of the nominal sensing distance Sn.  
 $0.9 S_n < S_r < 1.1 S_n$

**Usable sensing distance Su:** Value measured within the specified limits of the temperature and voltage zones, which must be between 81% and 121% of the nominal sensing distance Sn.  
 $0.81 S_n < S_u < 1.21 S_n$

**Operating sensing distance Sa:** Distance within which the detector will operate correctly in specified conditions.  
 $0 < S_a < 0.81 S_n$


**Repeatability R:** Value of variation in the actual sensing distance Sr in specified conditions (time, temperature, voltage).

**Differential travel H:** Distance between the pick-up point when the target approaches the detector and the drop-out point when the target moves away.

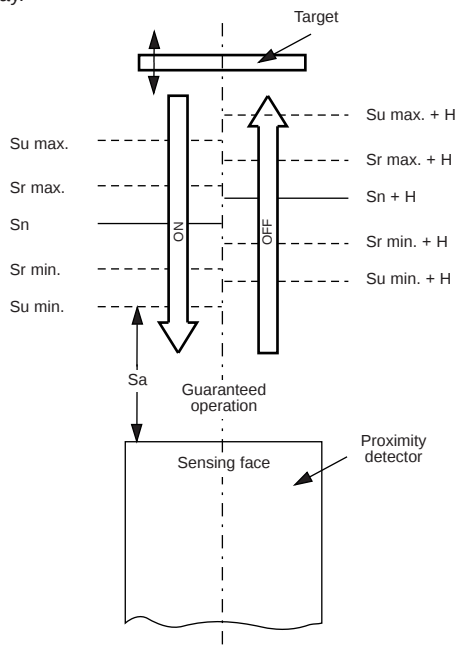

**Method of measuring sensing distances:** according to standard EN 50010.

**Lateral approach and axial approach:**

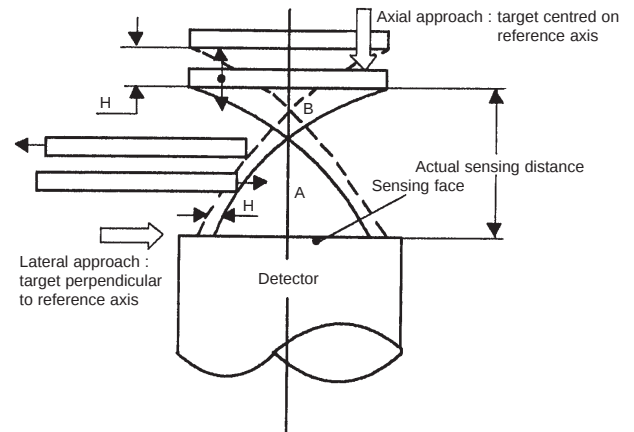

## Electrical characteristics:

**Normally open function (NO):** Corresponds to a detector whose output allows the current to pass through when the target is detected.

**Normally closed function (NC):** Corresponds to a detector whose output blocks the current when the target is detected.

Equivalent circuit diagram




**Voltage drop Ud:** Voltage measured across the active output of the detector in closed state under its nominal operating current (load current Ia).

**Load current Ia:** Maximum current with which the detector permanently operates correctly.

**Leakage current Ir:** Current which continues to circulate in the load and in the output circuit when the detector is in the open state.


**Minimum operating current Im:** Current necessary to maintain conduction of the switching element.

**Time delay before availability Tv:** Time necessary for the sensor output signal to operate when powering up.



**Switching frequency F:** Number of operating cycles carried out during a specified time. It is measured according to the method shown below (Standard EN 50010 NFC 63075).

m : width of the target.

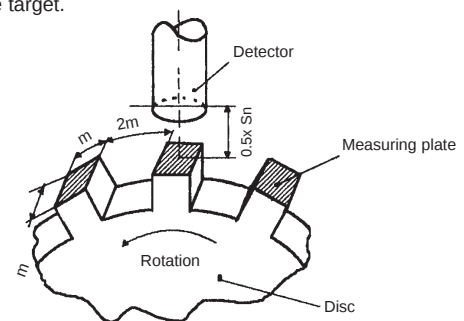



**Operating voltage Un:** Voltage range within which the detector maintains its specified characteristics.

**Ripple voltage:** Ratio between the amplitude of an alternating voltage (peak to peak) and the direct voltage on which it is superimposed.

Products and specifications subject to change without notice.



## Detection characteristic curves - cylindrical CENELEC types

### Screened versions

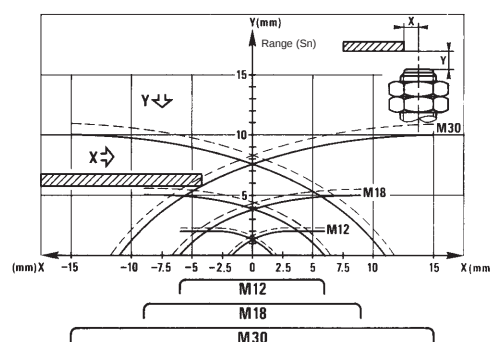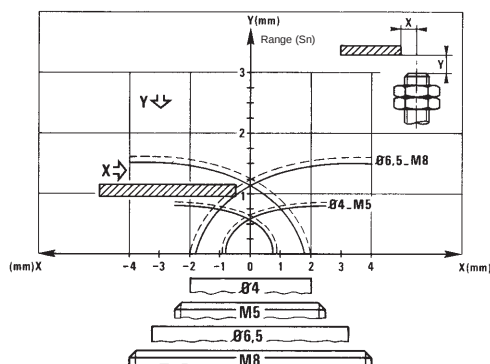

- Approach detection curve
- - Withdrawal detection curve (side detection)
- Sn Nominal sensing distance

### Non-screened versions

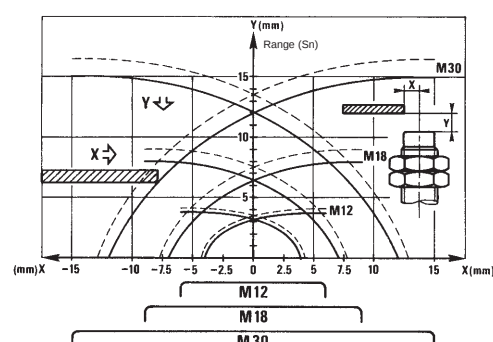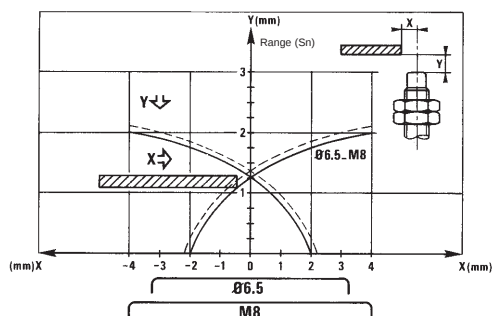

- Approach detection curve
- - Withdrawal detection curve (side detection)
- Sn Nominal sensing distance

### SCREENED IPD

| Ø mm    | Dimensions (mm) of sensed plate of A37 steel | Nominal sensing distance Sn (mm) |
|---------|----------------------------------------------|----------------------------------|
| Ø4      | 5 x 5 x 1                                    | 0.....0.8                        |
| M5      | 5 x 5 x 1                                    | 0.....0.8                        |
| Ø6.5    | 8 x 8 x 1                                    | 0.....1.5                        |
| M8      | 8 x 8 x 1                                    | 0.....1.5                        |
| M8 ext  | 8 x 8 x 1                                    | 0.....3                          |
| M12     | 12 x 12 x 1                                  | 0.....2                          |
| M12 ext | 12 x 12 x 1                                  | 0.....6                          |
| M18     | 18 x 18 x 1                                  | 0.....5                          |
| M18 ext | 18 x 18 x 1                                  | 0.....12                         |
| M30     | 30 x 30 x 1                                  | 0.....10                         |

### NON-SCREENED IPD

| Ø mm | Dimensions (mm) of sensed plate of A37 steel | Nominal sensing distance Sn (mm) |
|------|----------------------------------------------|----------------------------------|
| Ø6.5 | 8 x 8 x 1                                    | 0.....2.5                        |
| M8   | 8 x 8 x 1                                    | 0.....2.5                        |
| M12  | 12 x 12 x 1                                  | 0.....4                          |
| M18  | 18 x 18 x 1                                  | 0.....8                          |
| M30  | 30 x 30 x 1                                  | 0.....15                         |

### Notes

When materials other than steel are detected, the following correction factors must be applied :

| Material            | Correction factor |
|---------------------|-------------------|
| A37 mild steel      | 1                 |
| 316 stainless steel | 0.85              |
| Brass               | 0.40              |
| Aluminium           | 0.35              |
| Copper              | 0.30              |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Electrical connection


### 3-wire DC

PNP version

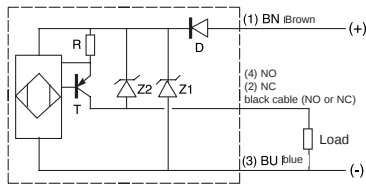

PNP output: load connected to negative supply


NPN version

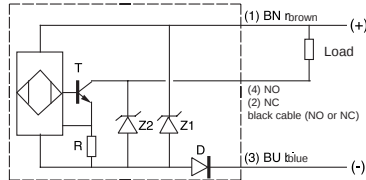

NPN output: load connected to positive supply

### 2-wire AC

Polarity reversible

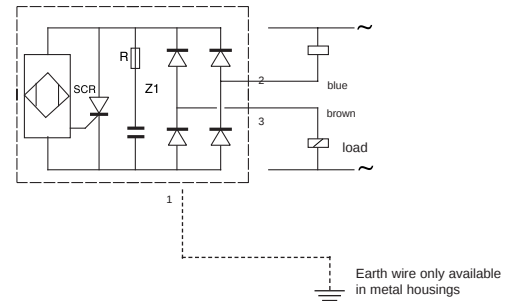


## Installation


"**Screened**" sensors can be inset in surrounding metal rising flush with the sensing face. With "**non-screened**" versions, check that there is no metal in the immediate vicinity of the sensing face. European standards define the minimum distance which must be allowed between two sensors and/or between sensors and surrounding metal articles so that the sensors will not be affected.

The figures given below (which are in line with European standards) are for mounting in mild steel (A 37) with non-restrictive operating conditions. Where there are multiple constraints (deposits, temperature, etc) additional correcting factors will need to be applied.

### Screened

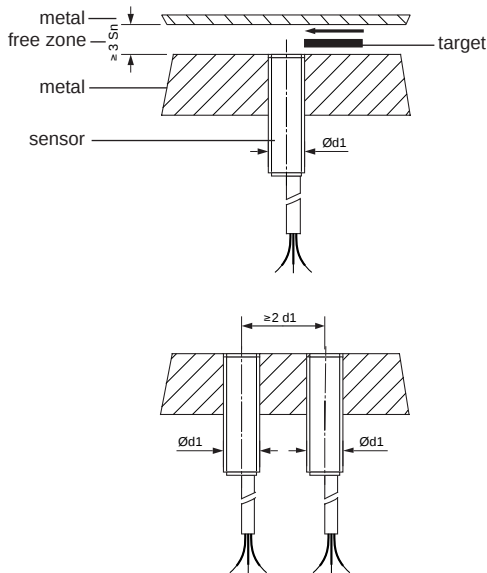

### Non-screened

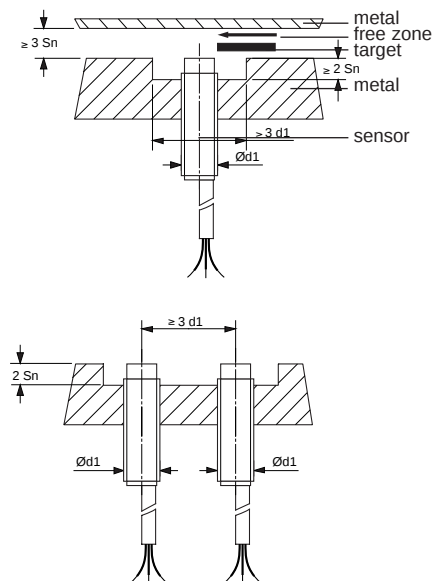

The sensing face of the sensor must not be positioned below the surface of the metal.

Where two sensors are installed facing one another, a gap of  $10 \times S_n$  must be left between the two sensing faces.


$S_n$ : Nominal sensing distance  
 $d1$ : diameter of IPD

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Mechanical installation advice


### Protection:

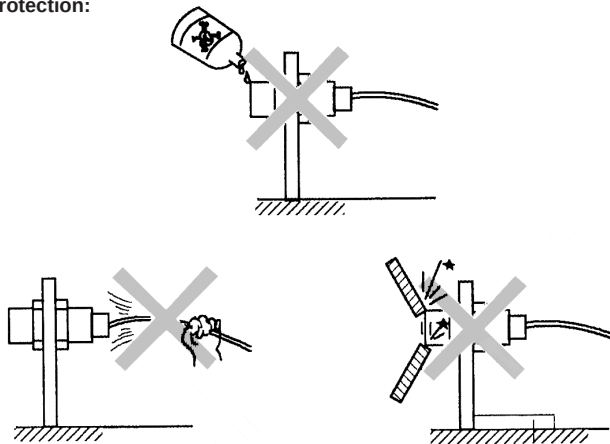

- Protect the cable against sharp objects or excessive heat.
- Do not exert a pulling force of more than 5 kg on the cable.
- The detectors are unable to withstand severe mechanical impact. The bracket must be sufficiently rigid to resist shock and vibration.
- Avoid using the detectors in a corrosive environment such as near strong acids, etc. (e.g. Nitric Acid).
- When a plastic detector is used in a chemical environment it is advisable to first verify the plastic's resistance to the chemical.

## Electrical installation advice


### Power supply:

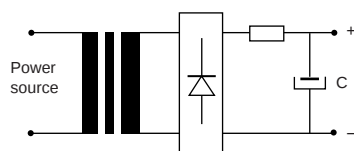

- Opposite is an example of a DC power supply for detectors using smoothing. To ensure that the resulting voltage is less than the maximum operating voltage of the detector, use a capacitor "C" to remove spikes and ripples greater than  $\pm 10\%$ . Ideally, use a transformer with a secondary voltage less than your required voltage.

Eg. 17.5 VAC from the secondary of the transformer to obtain less than 24 VDC.


### Connection:

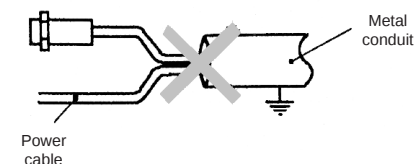

- Limit the length of the cables to 100 m and the capacitance of the line to 0.1  $\mu\text{F}$ . Also separate detector cables and power cables as far as possible.

### Connecting more than one sensor:

#### Series installation:

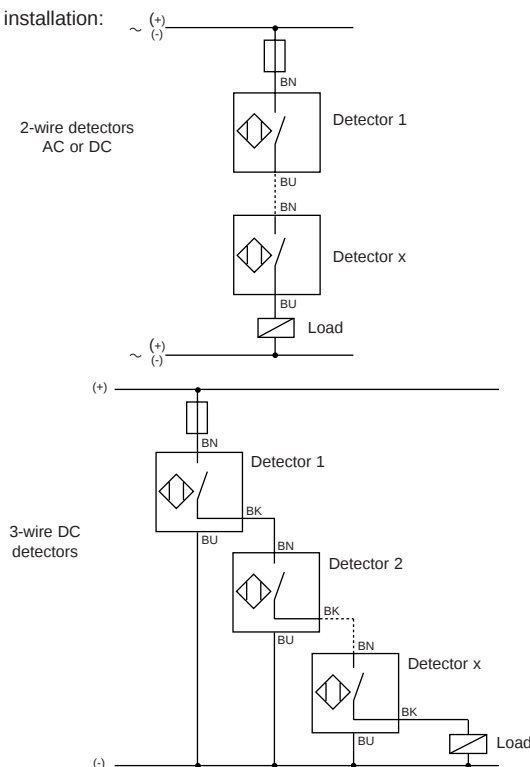

- It is possible to connect detectors in series:
  - Ensure that the voltage at the terminals of each sensor is less than or equal to the minimum operating voltage (in off-state).
  - In on-state, check that there is sufficient voltage available to activate the load.

This connection method is not possible if multivoltage sensors are used.

- With this connection method, add the voltage drop of each detector together and deduct from the supply voltage to ensure there is sufficient voltage to activate the load.


**Note:** detector 1 carries all the current for the additional detectors.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Inductive Proximity Detectors – Technical Guide

Parallel installation:

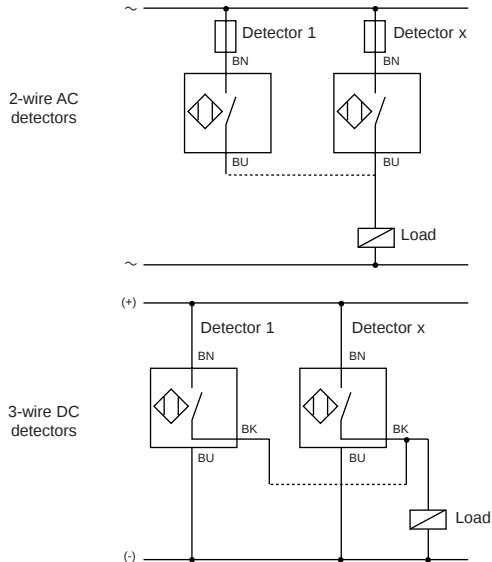


- With this type of installation the sum of the off-state leakage currents must be less than the current needed to drive the load.

**Note:** this installation should only be used with detectors which are activated one at a time.


- It is possible to connect 3-wire detectors in this configuration without any problems.

## Examples of applications

### ■ Part positioning

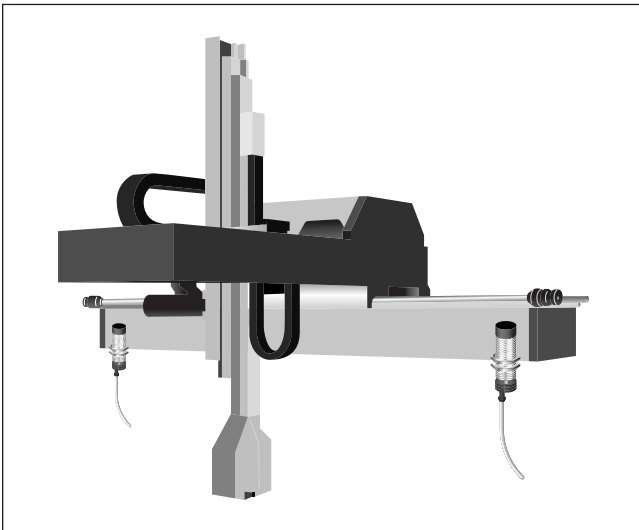

### ■ Parts recognition - Metal detection

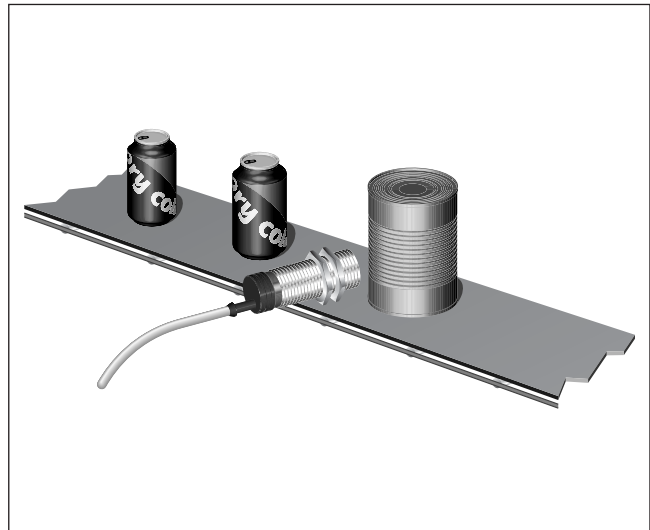


Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Examples of applications

### ■ Detection of broken drill

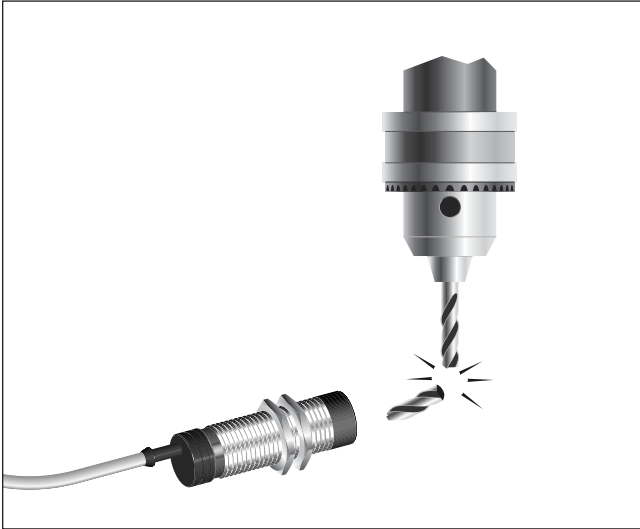


### ■ Control of robot grip

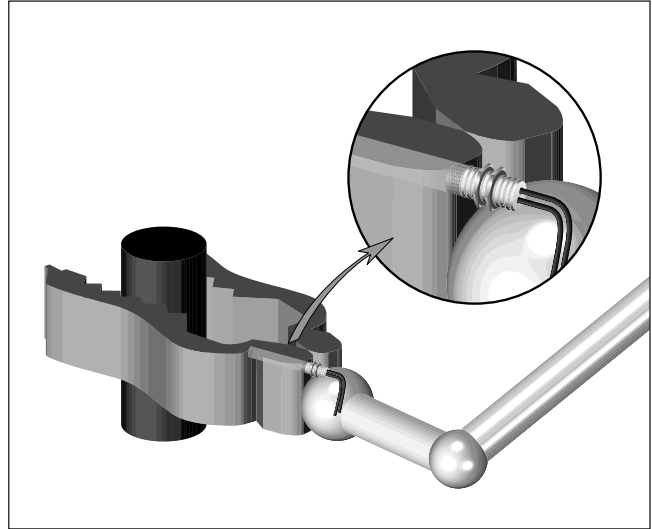

### ■ Rotation control



### ■ Screw detection

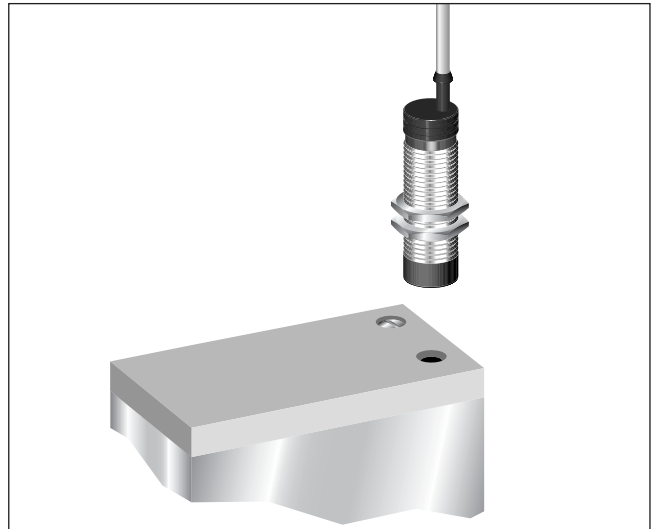


# Capacitive Proximity Detectors – Technical Guide

Capacitive proximity detectors consist of an RC-oscillator with a special multi-part sensing electrode. The electrode and the oscillator circuit have a tube connected with earth potential for lateral screening. This enables flush-mounting of the sensor in metal, since the electrical field is only present in front of the sensing electrode. This field is the active zone of the sensor.

When the conductive material is removed from the active zone, the oscillator is undamped and the oscillation amplitude decreases. The oscillator voltage amplifier and the sensor sensitivity can be modified using the built-in potentiometer.

The middle electrode and built-in reclosing function provide excellent compensation in conditions of humidity, dust or freezing. A special circuit automatically compensates for these influences. The preset sensing range remains practically constant. The electrode and compensating circuitry of the capacitive sensors are unique in design, and provide operating performances far superior to other capacitive sensors.

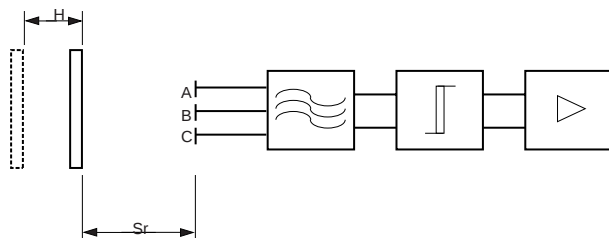


A indicates SENSOR ELECTRODE  
B and C indicates COMPENSATION ELECTRODES

## Applications

Capacitive sensors can be used to limit the level in tanks and containers. These may contain fluids, pulverised or granulated materials such as PVC, powder, dyes, flour, sugar, powdered milk, etc. These sensors can also be used as limit switches for checking and regulating machinery settings, even if the materials are not made of metal (as in conveyor belt positioning and material stacking), for checking drive belts and paper reels for sag and tear. Additionally, they can be used as detectors for counting metal and non-metal components.

Areas of application for capacitive sensors.

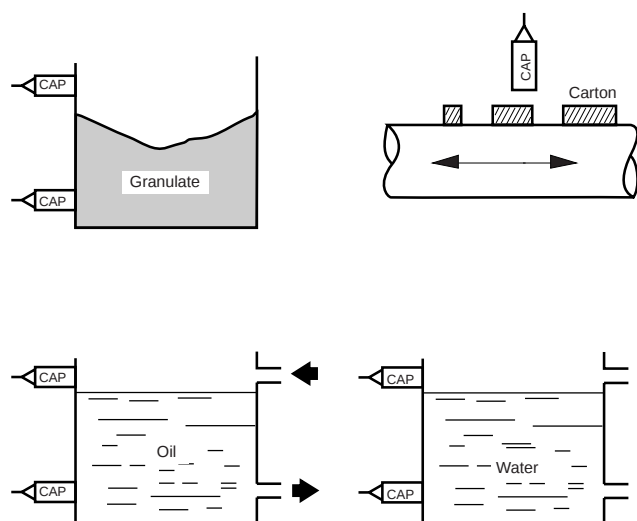

## Screened configuration


Sensors with a straight line electrical field.

These units can sense solids (plates, components, PCBs, hybrids, cartons, bottles, plastic blocks and stacks of paper for example) at a distance or liquids through a separating wall (glass or plastic up to a maximum of 4 mm thick).



## Non-screened configuration

Sensors with a spherical electrical field. These units are designed to touch the product, both bulk solids and liquids (granulate, sugar, flour, corn, sand or oil and water) with their active surface.



## Sensing range

The data was obtained using a 1 mm thick square steel plate (steel 37) as an actuator, with a side length equal to  $3 \times S_n$ . The steel plate was grounded. The ambient temperature was 25°C. The maximum sensing range was defined as the nominal sensing range with a tolerance of  $\pm 10\%$ .


The sensing range depends on the shape, size and type of object concerned. If the plate is made of different material or has a smaller diameter, the sensing distance will be reduced.

## Size correction factor

For objects which are not flat and which are smaller than the active sensor surface, the following sensing ranges are obtained depending on the scanned object F/FO surface, where F is the front sensor surface (active surface) and FO the front surface of the object being scanned. The figures in the table below refer to flush-mounting sensors and objects in the form of long thin rods.

| Scanned object F/FO surface | Nominal sensing range $S_n$ in mm |
|-----------------------------|-----------------------------------|
| 1.50                        | 100                               |
| 1.24                        | 100                               |
| 0.80                        | 100                               |
| 0.61                        | 100                               |
| 0.31                        | 94                                |
| 0.20                        | 85                                |
| 0.15                        | 82.5                              |
| 0.05                        | 67.5                              |
| 0.03                        | 57.5                              |

The diagram below shows the data from the table in graphic form.

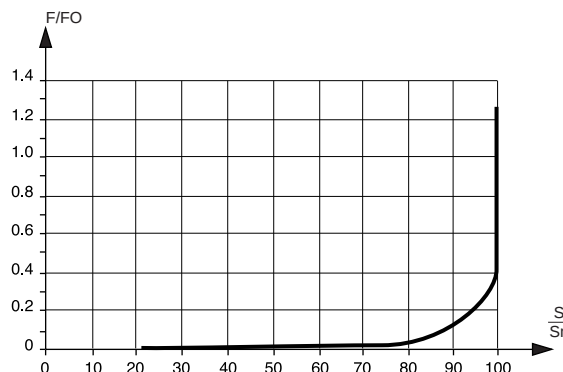

Products and specifications subject to change without notice.

# Capacitive Proximity Detectors – Technical Guide


## Material correction factor

If the object in question is not metal or water, the sensing range is reduced. The reduction factors for the different materials are shown in the table below.

| Material                                                                                                   | Sensing range<br>compared to a surface of water |       |       |                               |
|------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------|-------|-------------------------------|
|                                                                                                            | 20 mm                                           | 10 mm | 15 mm | 10 mm                         |
| Hand                                                                                                       | 20                                              | 10    | 15    | 10                            |
| Square steel plate (100 x 100 x 1)                                                                         | 20                                              | 10    | 15    | 10                            |
| Round steel plate (30 Ø x 1)                                                                               | 11                                              | 6     | 4     | 2                             |
| Stone (marble)                                                                                             | 18                                              | 8.5   | 8     | 5                             |
| Wood                                                                                                       | 13                                              | 5     | 5     | 3                             |
| Glass                                                                                                      | 12                                              | 4     | 6     | 2.5                           |
| Carbon                                                                                                     | 19                                              | 9     | 12    | 9                             |
| PVC-block (30x30x5)                                                                                        | 8                                               | 4     | 1.5   | –                             |
| Lupolen granulate 1800 H                                                                                   | 8                                               | 3     | 2.5   | Head approx.<br>2 mm immersed |
| Polystyrene 454 H                                                                                          | 9.5                                             | 3     | 4     | 1                             |
| Hostalen GC 8960 H                                                                                         | 8.2                                             | 1.5   | 2     | Head approx.<br>1 mm immersed |
| Vestylon 719-50                                                                                            | 7.9                                             | 1.2   | 2     | Head approx.<br>3 mm immersed |
| Hostyren                                                                                                   | 8.2                                             | 3     | 3     | Head approx.<br>1 mm immersed |
| BM scrap material (Z)                                                                                      | 6.7                                             | 1.4   | 1     | Head surrounded               |
| Hostalen GC coarse powder                                                                                  | 8                                               | 2     | 1.5   | Head approx.<br>3 mm immersed |
| Lupolen fine granulate                                                                                     | 7.7                                             | 1.5   | 1     | Head approx.<br>3 mm immersed |
| Hostaform C                                                                                                | 9.8                                             | 3.5   | 4     | 1                             |
| Hostyren (polystyrene)                                                                                     | 7.4                                             | 2     | 2.5   | Head approx.<br>2 mm immersed |
| Hostalit S                                                                                                 | 7.5                                             | 2     | 1.5   | Head surrounded               |
| Hostalit PP                                                                                                | 5                                               | 1.5   | 1.5   | Head surrounded               |
| Hostalit E                                                                                                 | 7.2                                             | 1     | 1     | Head approx.<br>4 mm immersed |
| Styropor unfoamed                                                                                          | 8.1                                             | 3     | 3     | 0.5                           |
| Styropor Ø 1.5                                                                                             | –                                               | –     | –     | –                             |
| Antimony-trioxyde                                                                                          | 6.2                                             | 0.9   | 2.5   | Direct contact                |
| Oil                                                                                                        | 9                                               | 3     | 5     | 3                             |
| Maximum sensing range<br>critical point                                                                    | 55                                              |       | 110   |                               |
| Conditions :<br>Tu = 25 °C ; VA = 24 Vdc<br>In each case, the measurements were made from a level surface. |                                                 |       |       |                               |


## Sensitivity adjustment

Capacitive proximity detectors are fitted with a 14-turn potentiometer. The potentiometer must be adjusted to suit most applications. Turn in a clockwise direction to increase sensitivity. From the original setting of  $0.7\text{--}0.8 \times S_n$  ( $S_n$  = nominal sensing range), the nominal sensing range is reached after 2-3 turns. This leads to non-linearity of the curve and hypersensitivity, which may cause the sensor to lock. If this occurs, decrease sensitivity by turning the potentiometer 2-3 turns anticlockwise.

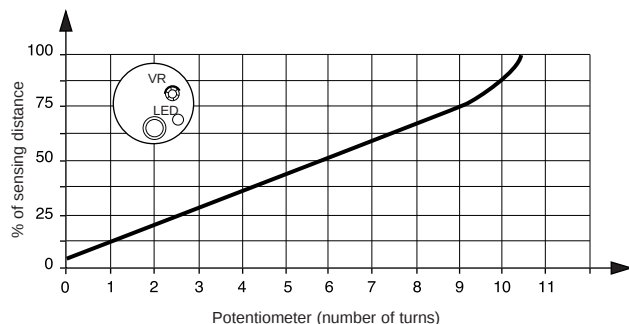


## Temperature

Capacitive proximity detectors operate within a temperature range of  $-5^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ . The maximum sensing distance deviation is  $\pm 10\%$  when the adjusted sensing distance at  $+20^{\circ}\text{C}$  is no greater than the nominal specified distance (taking the material reduction factors into consideration).

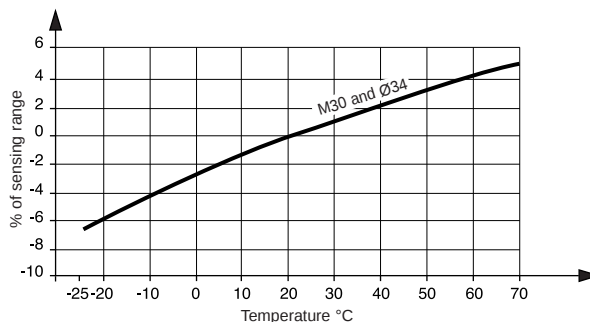

## Example of setting procedure

A liquid (water, for example) is to be scanned through a separating wall by a sensor. The separating wall is made of glass or plastic, with a maximum thickness of 4 mm. The thickness in mm should be between 10 and 20% of the adjusted sensing distance, but always less than 4 mm.

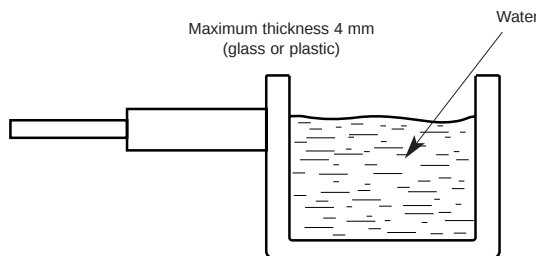


The face (active surface) of the sensor is bonded to the glass or plastic wall. The vessel is filled with water until approx. 75% of the active surface of the sensor is covered. Turn the sensor potentiometer anti-clockwise (to reduce the sensitivity) until the LEDs and the output signal turn off. Turn the potentiometer clockwise (to increase the sensitivity) until the LEDs and the output signal light up. Using the calibration process described ensures that the sensor does not detect the wall or the water residue on the wall. It only operates once the liquid has reached the 75% level described above.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## Installation conditions

The presence of surrounding objects may affect capacitive proximity detectors. These objects may reduce sensing capacity or may themselves be detected. It is necessary to maintain a standard distance between a capacitive proximity detector and the surrounding objects when installing this type of detector.

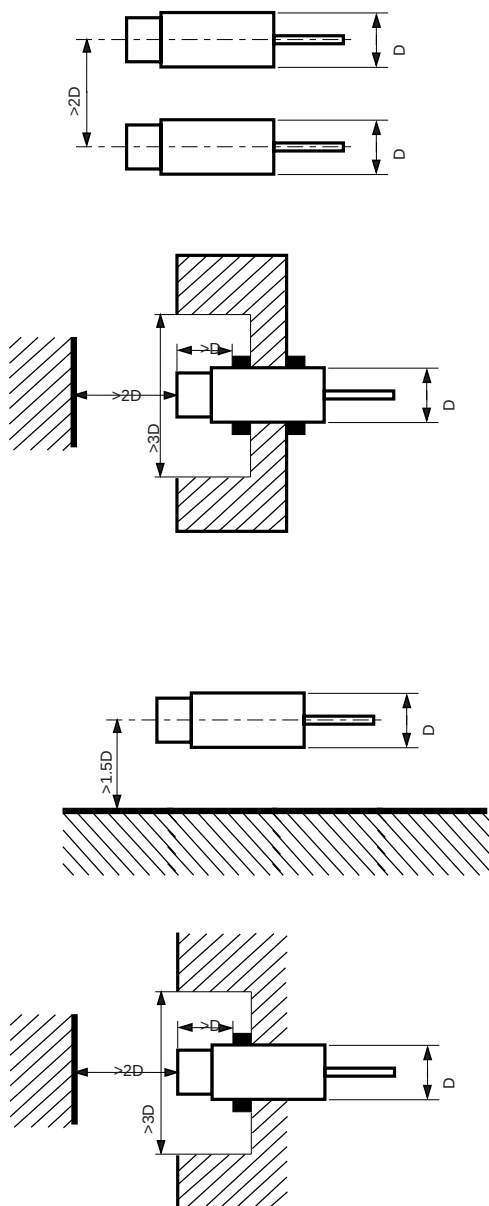

## Effects of water droplets on the sensing face

The curves below illustrate the modifications to the operating range which may be caused by the presence of water droplets on the sensing face of a capacitive proximity detector. If the quantity of water droplets is 0.2 ml (approx. 2-3 drops), the operating range is extended by around 20 %; if the water droplets cover the entire sensing face, the operating range is extended by more than 300 %.

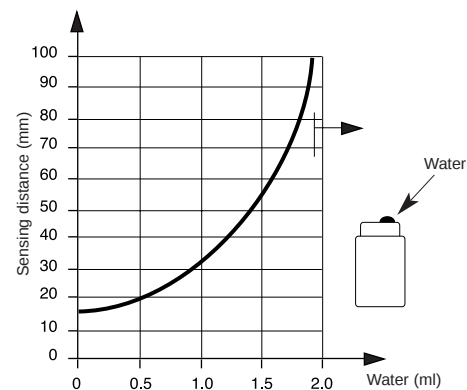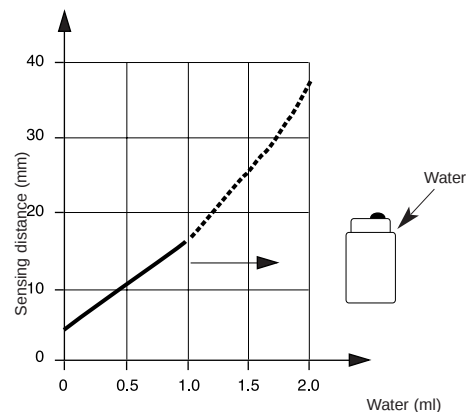


## Warning

The presence of frost, ice, moisture, oil or dust on the active surface will prevent reliable operation.

The detection of liquids or powders attached to the walls of non-metallic vessels will prevent reliable operation.

Connecting a DC capacitive proximity detector to a high-load current (current higher than 200 mA) (for electric motors and electromagnetic contacts) will cause the output transistor to malfunction. The detector must be connected via a relay.

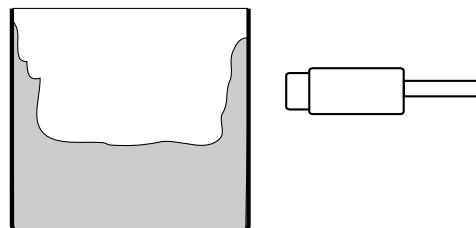



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crouzet:

[83806051](#) [70602118](#) [70507526](#) [831613C6.EB](#) [IMB1805T](#) [83123018](#) [83123015](#) [83803051](#) [831613C3.L](#)  
[831615C6.CBMR](#) [831613C6.CBMR](#)