




Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

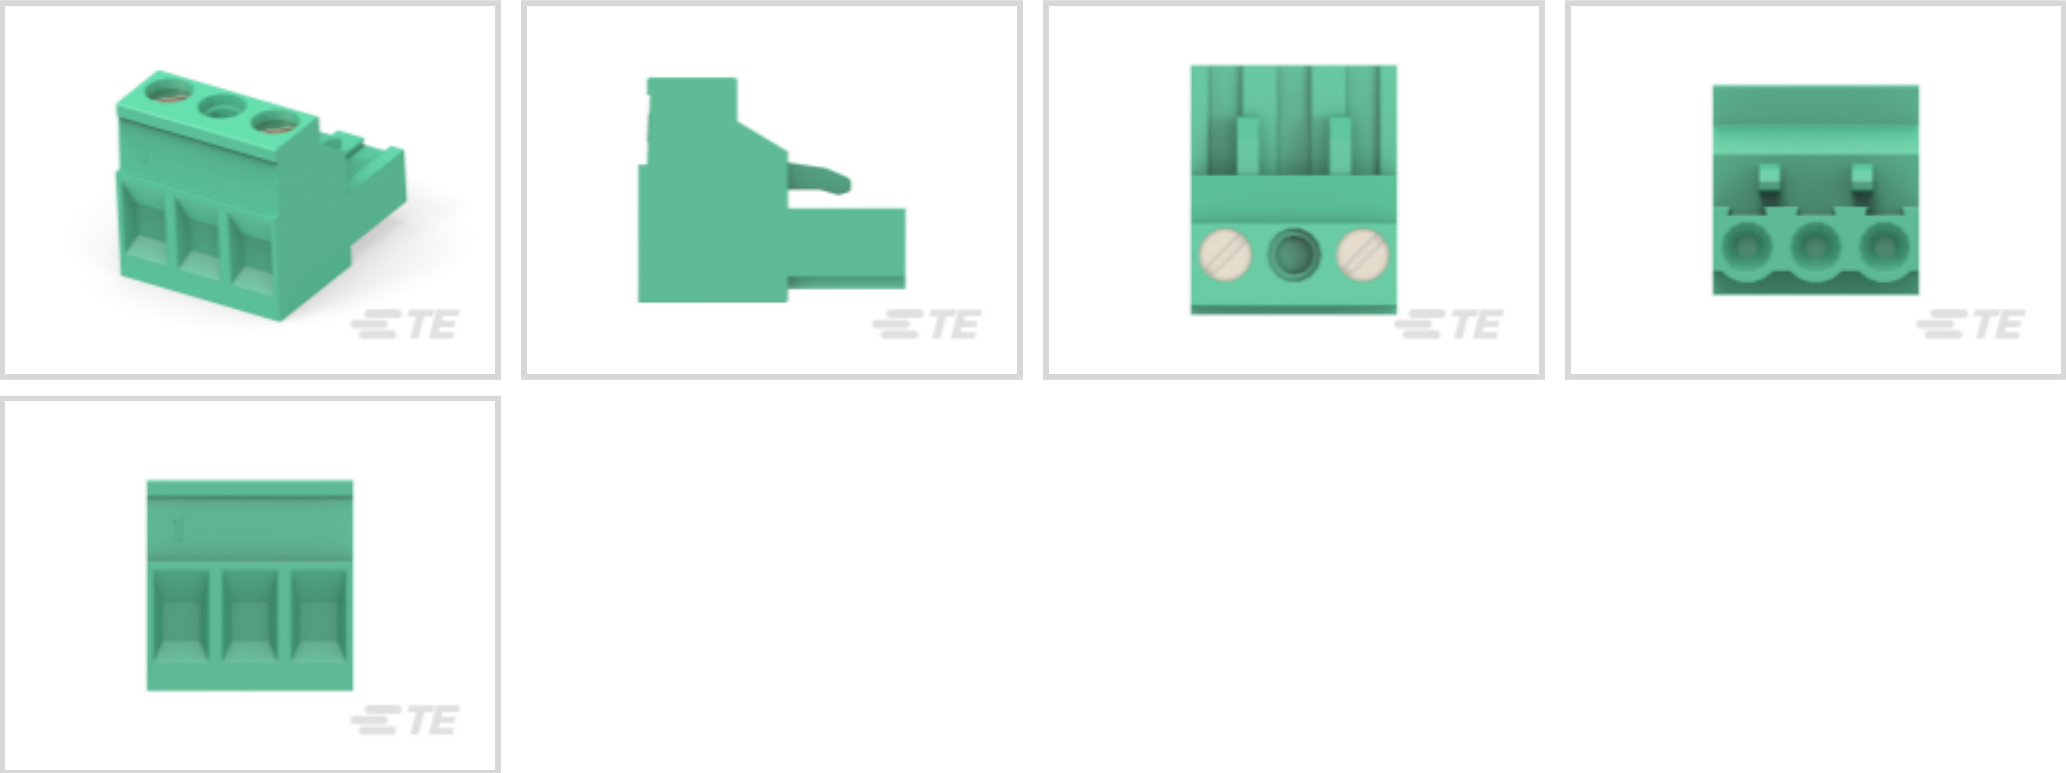

Terminal Block Connector Type: **Plug**  
Connector System: **Wire-to-Board**  
Number of Positions: **2**  
Centerline (Pitch): **10.16 mm [.4 in]**  
Number of Rows: **1**

Features

Product Type Features

|                                   |               |
|-----------------------------------|---------------|
| Wire Protection                   | With          |
| Terminal Block Connector Type     | Plug          |
| Connector System                  | Wire-to-Board |
| Connector & Contact Terminates To | Wire & Cable  |

Configuration Features

|                        |                |
|------------------------|----------------|
| Wire Entry Location    | Side           |
| Stacking Configuration | Side Stackable |
| Number of Positions    | 2              |
| Number of Rows         | 1              |
| Wire Entry Angle       | 180°           |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Green |
|-----------------------|-------|



|                                                                 |                                                                                                                                                                                                     |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Orientation                                             | Right Angle                                                                                                                                                                                         |
| Contact Features                                                |                                                                                                                                                                                                     |
| Contact Mating Area Plating Material                            | Tin                                                                                                                                                                                                 |
| Contact Base Material                                           | Phosphor Bronze                                                                                                                                                                                     |
| Contact Current Rating (Max)                                    | 15 A                                                                                                                                                                                                |
| Mechanical Attachment                                           |                                                                                                                                                                                                     |
| Screw Plating Material                                          | Nickel                                                                                                                                                                                              |
| Screw Material                                                  | Brass                                                                                                                                                                                               |
| Thread Size                                                     | M3                                                                                                                                                                                                  |
| Housing Features                                                |                                                                                                                                                                                                     |
| Housing Material                                                | PA 66                                                                                                                                                                                               |
| Centerline (Pitch)                                              | 10.16 mm[.4 in]                                                                                                                                                                                     |
| Dimensions                                                      |                                                                                                                                                                                                     |
| Wire Size                                                       | .05 – 3 mm <sup>2</sup>                                                                                                                                                                             |
| Usage Conditions                                                |                                                                                                                                                                                                     |
| Operating Temperature Range                                     | -40 – 105 °C[-40 – 221 °F]                                                                                                                                                                          |
| Operation/Application                                           |                                                                                                                                                                                                     |
| Circuit Application                                             | Power & Signal                                                                                                                                                                                      |
| Packaging Features                                              |                                                                                                                                                                                                     |
| Packaging Quantity                                              | 200                                                                                                                                                                                                 |
| Packaging Method                                                | Box                                                                                                                                                                                                 |
| Product Compliance                                              |                                                                                                                                                                                                     |
| For compliance documentation, visit the product page on TE.com> |                                                                                                                                                                                                     |
| EU RoHS Directive 2011/65/EU                                    | Compliant with Exemptions                                                                                                                                                                           |
| EU ELV Directive 2000/53/EC                                     | Compliant with Exemptions                                                                                                                                                                           |
| China RoHS 2 Directive MIIT Order No 32, 2016                   | Restricted Materials Above Threshold                                                                                                                                                                |
| EU REACH Regulation (EC) No. 1907/2006                          | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>SVHC > Threshold:<br>Pb (3% in Component Part)<br><small>Article Safe Usage Statements:</small> |




Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

|                           |                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------|
| Halogen Content           | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability                                        |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

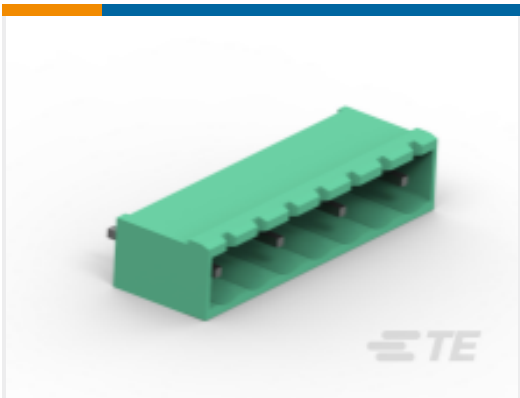

TE Part # 282828-2  
TERMI-BLOK HEADER,ASSY90 2P.

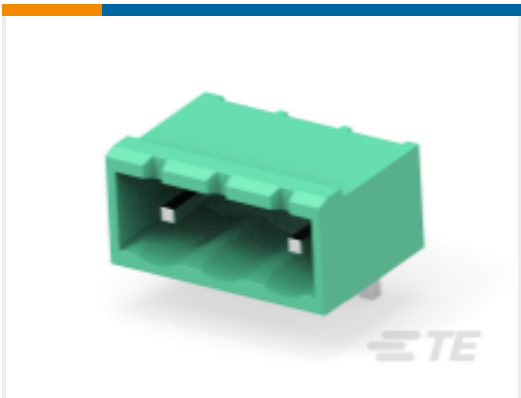


TE Part # 282818-2  
TERMI-BLOK HEADER,ASSY90 2P.1

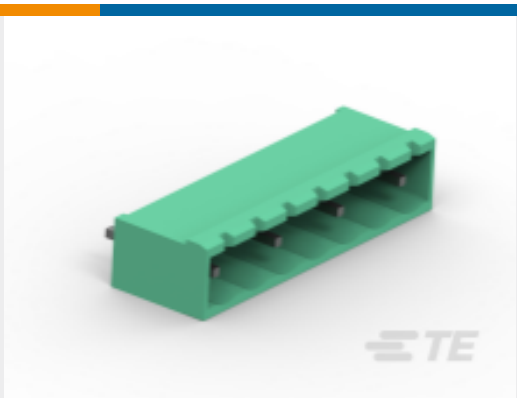

TE Part # 1-282828-4  
TERMI BLOK HEADER - 1800 CLOSE


Customers Also Bought

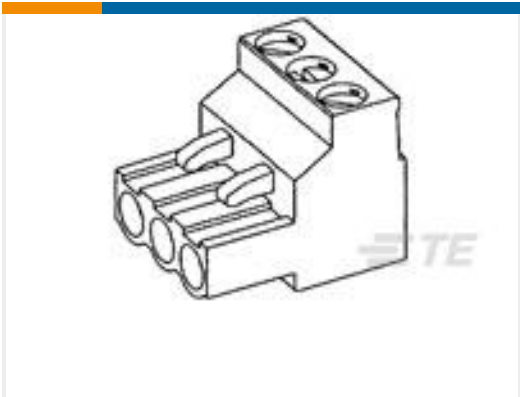

TE Part #796634-5  
5 POS 5.08MM R/A PLUG,TRM BLK



TE Part #321884  
TERM, STRAT,SOLIS, HT, 22-16, #4

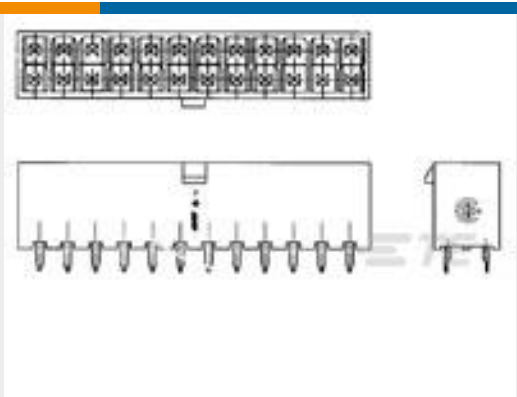

TE Part #1-1586037-2  
12P VERT HDR VAL-U-LOK V2



TE Part #1-770968-1  
04P MINI UMNL R/A HDR ASSY LF



TE Part #1658621-5  
24 NOVO MIL/CTR 15DP,LEAD FREE

TE Part #1761606-8  
IDC LOW PRO HDR 24P VERT LG LA

TE Part #3-1462039-1  
IM26GR=IM RELAY 50mW 12V

TE Part #2-2176349-1  
CRGCQ 2512 470R 1%

Documents

Product Drawings

TERMI-BLOK PLUG STACKING 2P.10

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_282809-2\_E.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_282809-2\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_282809-2\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

BUCHANAN PCB TERMINAL BLOCKS

English

1-1773458-1\_EURO\_STYLE\_TERMINAL\_BLOCKS\_QRG

English

Product Specifications

Application Specification

English

Agency Approvals

UL

English