


SPECIFICATIONS

- 1. CASE:
18 GA. (.048) CRS, TIN PLATED
- 2. RATED CURRENT:
60A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.4mA MAX. @ 250VAC, 50Hz


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11-24-03	LE
B	ADDED DIMENSION FOR TERMINALS	12-17-03	LE

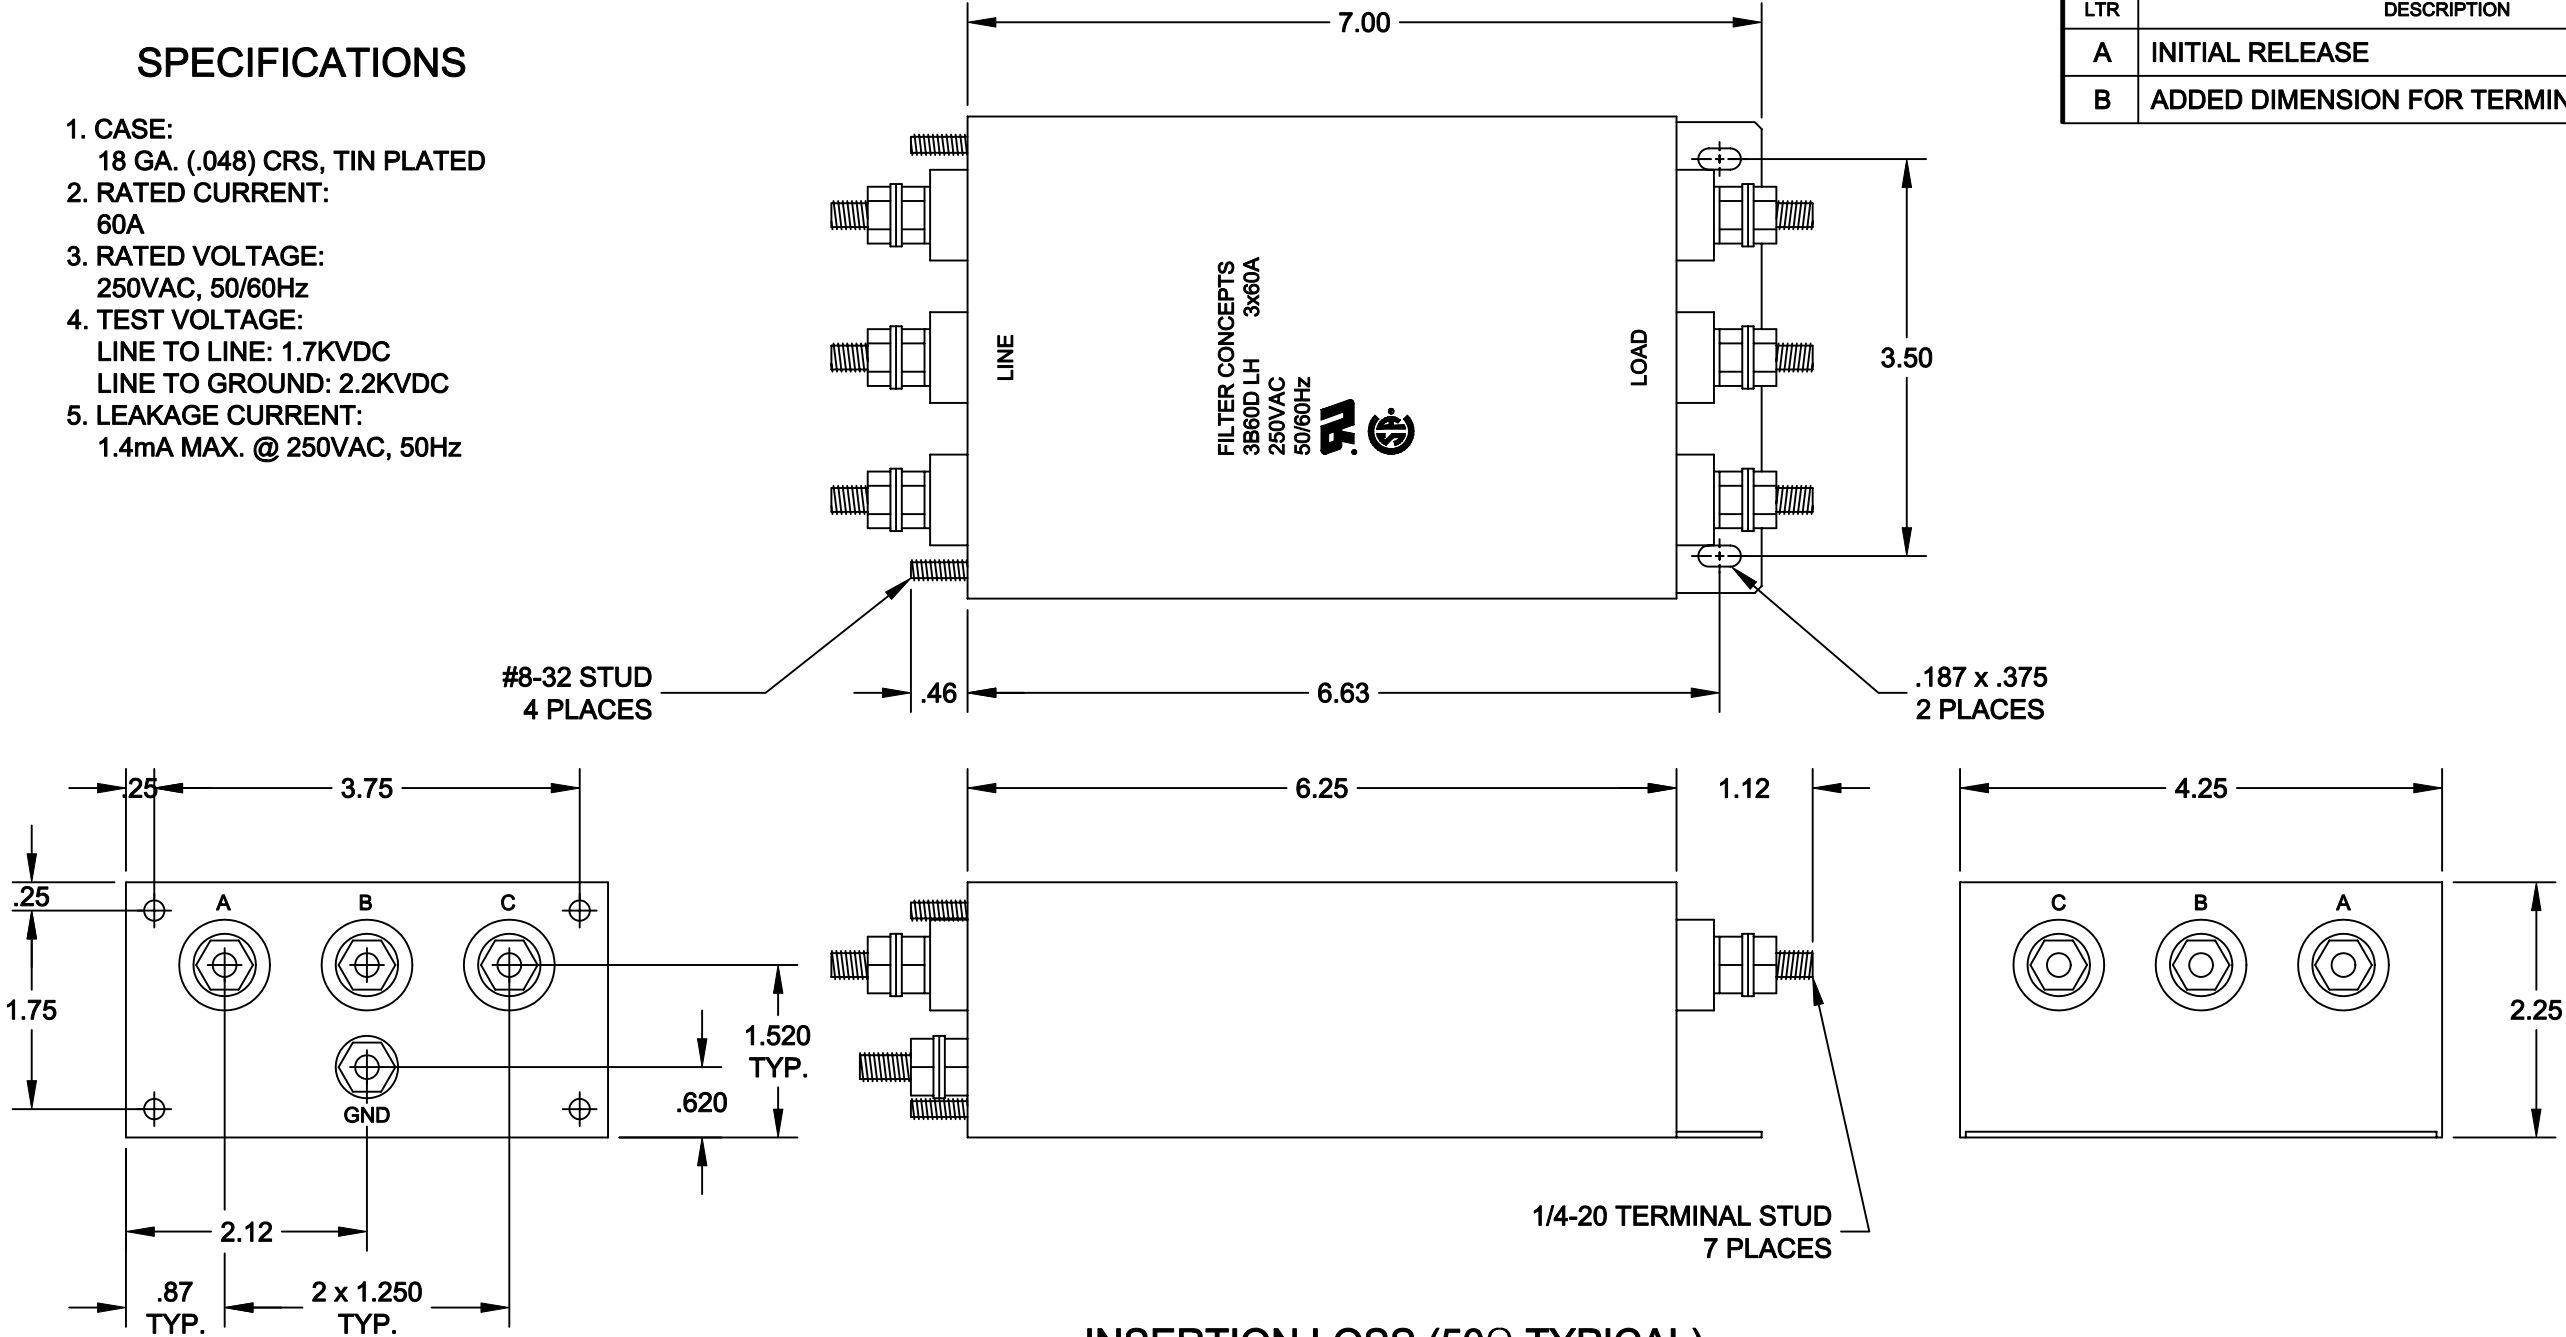

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	18 db	30 db	60 db	60 db	60 db	50 db
L/G	4 db	18 db	35 db	44 db	50 db	50 db

SCHEMATIC

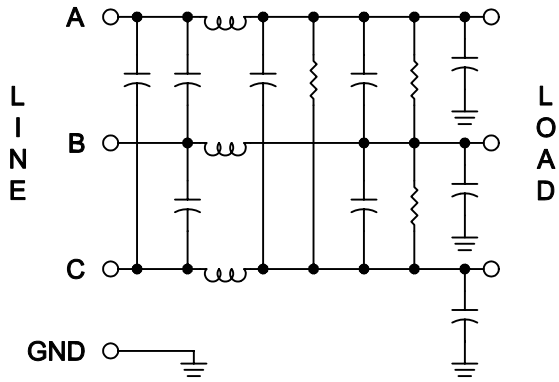

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ±.030 ±
XXX ±.010

CONTRACT NO.

APPROVALS

DATE

DRAWN

GIANG TRINH

10-23-04

CHECKED

DANNIEL VUONG

11-24-03

MATERIAL

FINISH

NEXT ASSY	USED ON
APPLICATION	

FILTER CONCEPTS INC.

APPLICATION DRAWING
3B60D LH FILTER

SIZE

B

CODE IDENT NO.

DRAWING NO.

7747

SCALE 3/5

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[3B60D LH](#)