


6			5	
ITEM	PART#	DESCRIPTION	QTY	UOM
A	512161000	2.0 WtB Rec Hsg 10Ckt	1	PC
B	593708000	2.0 WtB Crimp Rec Chn	10	PC
C	----	WHITE PART ID LABEL	1	PC

PART NUMBER	TITLE	L1	L2(REF)
2244831100	MicroTPA 2.0 R-S 10ckt 50mm disc Sn	50±5	15
2244831101	MicroTPA 2.0 R-S 10ckt 100mm disc Sn	100±5	15
2244831102	MicroTPA 2.0 R-S 10ckt 150mm disc Sn	150±5	15
2244831103	MicroTPA 2.0 R-S 10ckt 300mm disc Sn	300±5	15
2244831104	MicroTPA 2.0 R-S 10ckt 600mm disc Sn	600±5	15

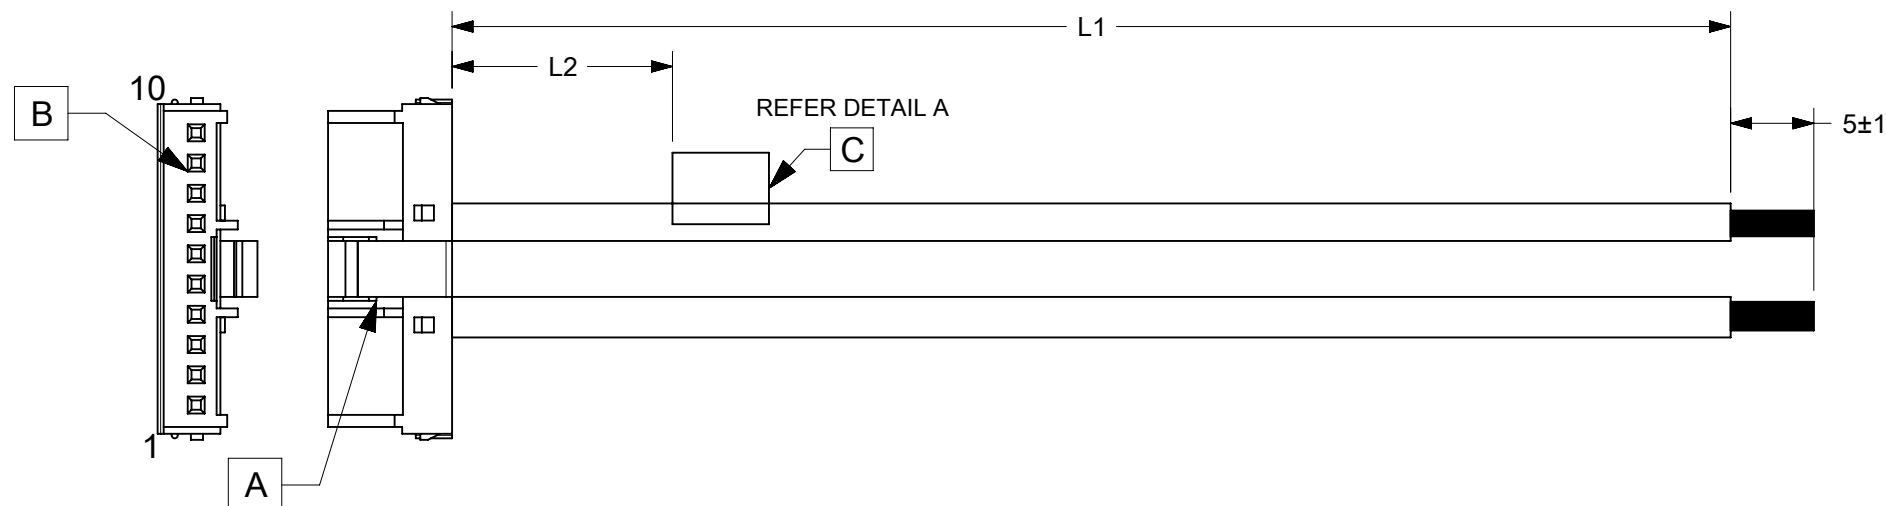

NOTES:

1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
3. LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
4. LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
5. TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
6. FREE ENDS MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5 ± 1 MM. TINNING DIA MUST BE 0.90 MM MAX.

REVISION					
DATE	REV	DESCRIPTION		CHANGER	
2023/01/04	A	INITIAL RELEASE		THANUB	
DOCUMENT STATUS		P1	RELEASE DATE	2023/02/08	09:35:34

[illegible]

FORMAT: master-tb-prod-A4
REVISION: J1
DATE: 2021/05/01