

Magnetic Buzzer

Magnetic Transducer(External Circuitry Type)

SMD Type
KSSG33J12


Shape

KSSG33J12



Operating Voltage Range(Vo)	2.0 ~ 4.0
Current Consumption (mA)	Max. 110
Coil Resistance(Ω)	12±3
Sound Pressure Level (dBA)	Min. 75dBA@10cm
Rated Frequency(Hz)	4000
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +80
Weight (Gram)	0.6
Rated Voltage(Vp)	3.0
Material	L.C.P (Black)

Dimension

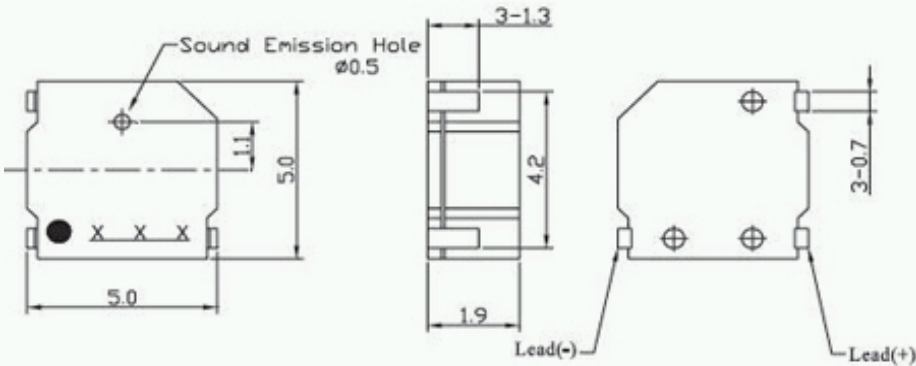

Tol : ±0.5 Unit : mm

Characteristic / Schematic Diagram

