
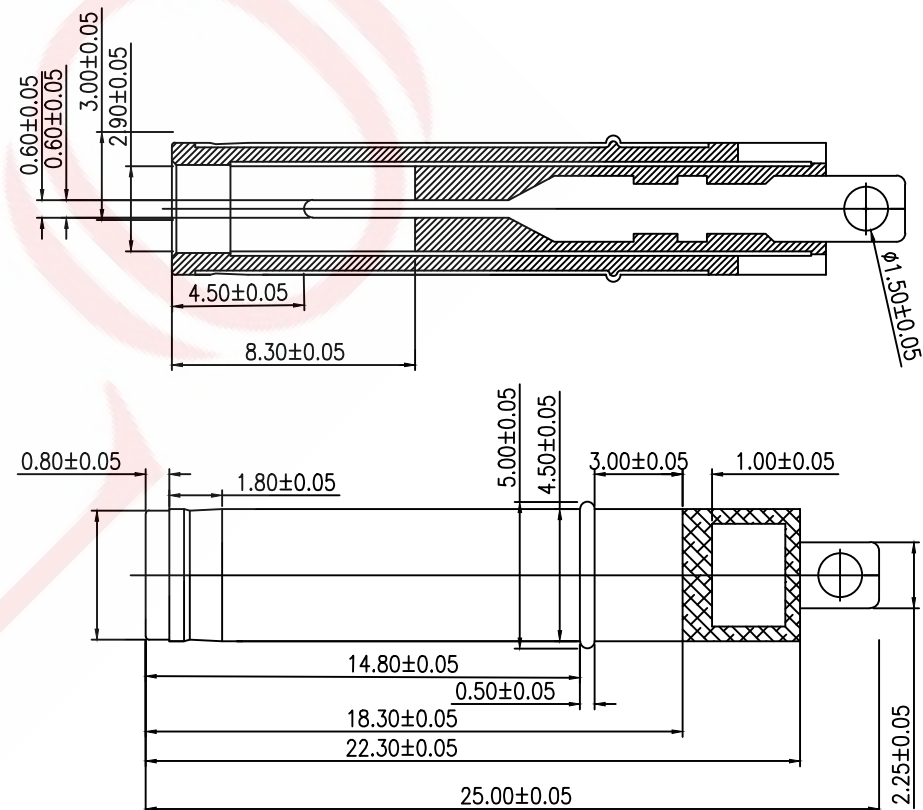
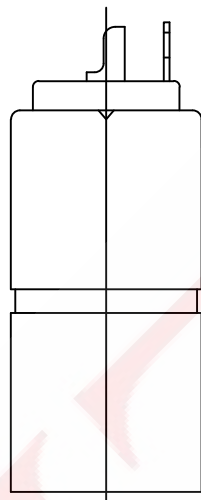



ROHS

REV	ECN NO	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020.06.12

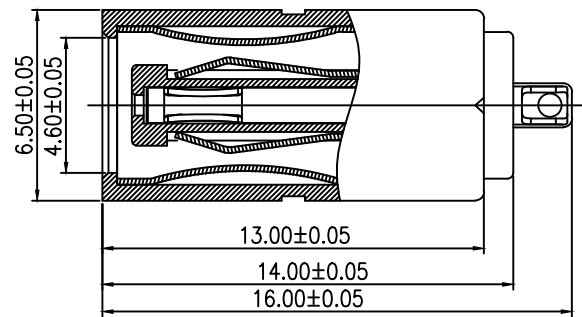

主要技术性能


- 额定电负荷: 20V 5A;
- 绝缘电阻: $\geq 100M\Omega$;
- 耐压: AC500V (50Hz) /min;
- 插拔力: 3~25N;
- 寿命: 5,000次。

公头数据

序号	名称	数量	材料	备注
6	外管	1	黄铜带	镀镍
5	中网	1	磷铜带	镀镍
4	弹片	1	磷铜带	镀镍
3	内针	1	黄铜棒	镀镍
2	后盖板	1	PBT	黑色
1	主体基座	1	PBT	黑色


9C H 2 140 B E L A

Model Definition
Mould Number: MX4506
Needle Diameter: Core5.0 mm, Inner Hole 0.6 mm
Fixing Method: Without Fixed Column
Interface Method: Conventional Flared Opening
Overall Length: 14.00 mm
Pin Position: 2 Pin
Mounting Method: Wire Welding
Product Series: DC Power Jacks

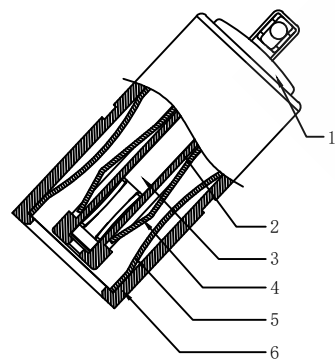

DESIGN	WANGGUIFA	2018.06.12	12	$\geq 2\sim 5<$	± 0.25
CHECKED	ZHENGUILAN	2018.06.12		$\geq 0\sim 2<$	± 0.15
APPROVED	LILIANJIANG	2018.06.14		≥ 5	± 0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE: 大电流 焊线式 2P母座
DWG NO: 9CH2-A4506
PART NO: 9CH2-20224506
MODEL NO: 9CH2140BELA
NAME: DC JACK

SAMZO COMPONENTS
Electronic switch and connector manufacturer