


PXF4050BAB Datasheet

Product Name

// 10 M, Multimode, Cabled, Flex fiber connector

View Product Page

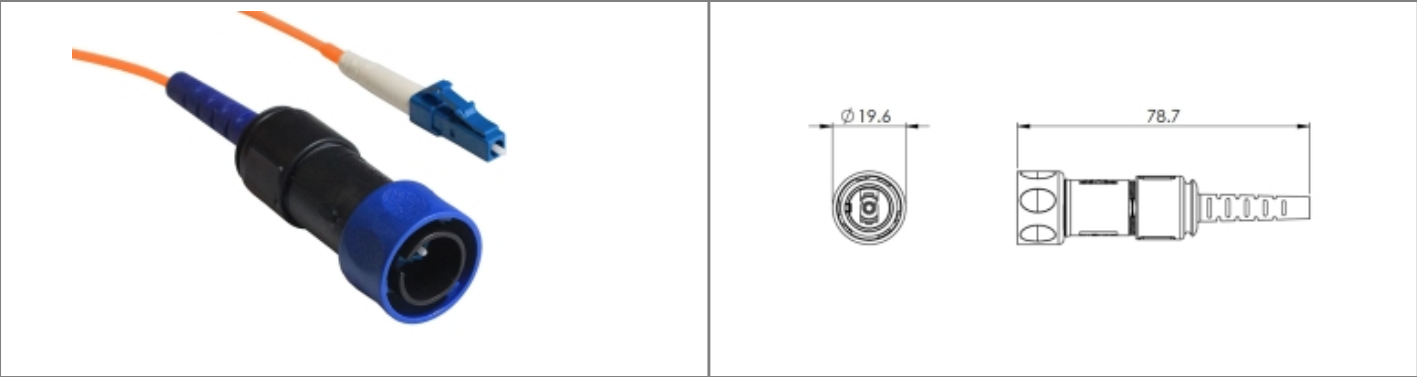

// Product Description:	
Flex Fiber Connector to LC type Connector	Choices of OS1, OM1 and OM3 cables for single or multimode
Sealed to IP66, IP68, IP69K when mated with compatible connector	PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
no cable options, or pre-terminated from 5M - 450M available	Mate with Inline fiber connector or panel mount connectors PXF4051, PXF4053
Simplex LC type fiber connector	

// General Information:	
Product Display Title:	Flex Fiber Connector to LC type Connector
Product Family:	Circular Fiber Connectors
Product Series:	4000 Series - Simplex LC Fiber Buccaneer
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Contact Type:	LC Fiber
Coupling Type:	30 Degree coupling
Diameter Over Coupling Ring Mm:	19.7mm
Fibre Mode:	OM1
Flamability Rating:	UL94V-0
Function:	Flex to LC Connector Double Ended Fiber Cable
Ip Rating:	IP66, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C

// Product PDF Links

PDF

4000 Series Fiber connectors...

// Product 3D CAD Model Links

CAD

PXF4050BAB3D CAD Model