

RoHS

REVISIONS

SYM	ECN No.	MODIFICATION	DATE	ISSUED

Note:

1.Material:

- 1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0
- 1.2,Contact: copper alloy,t=0.25mm
- 1.3,Shell: copper/Ferroalloy alloy,t=0.35mm

2.Specification:




- 2.1,Current rating:3A Max.
- 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3,Contact resistance: 30 mΩ Max.
- 2.4,Insulation resistance: 100 MΩ Min.
- 2.5,Total mating force: 3.57 Kg Max.
- 2.6,Total unmating force: 1.0 Kg Min.

3.Finish:

- 3.1,Contact: Plated Gold in Mating Area:
Tin On Solder Tails
Shell: Nickel Plating

4.Environmental:

- 4.1,Temperature range: -55°C~85°C

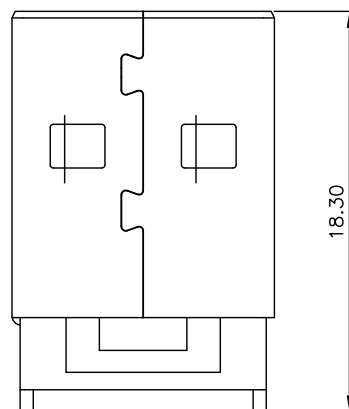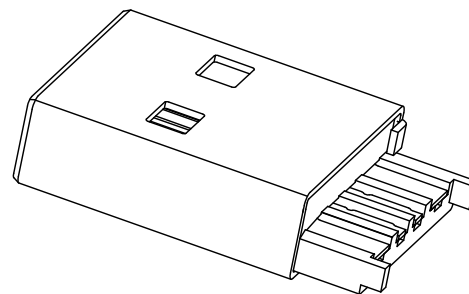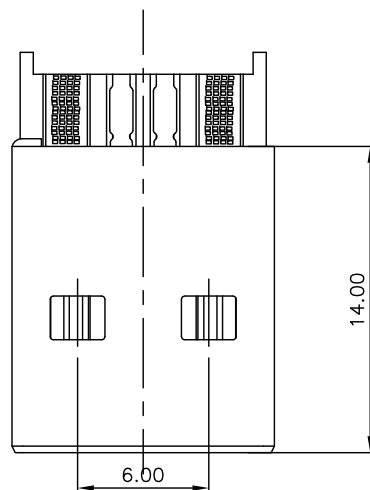

DRAWN		 深圳市精拓金电子有限公司				
CHECKED		TITLE AM大电流一体式（大縫隙） PBT綠色	PART NO. 917-111A115DAM0400			
APPROVED			DRAWING NO. --			
 3rd ANGLE PROJECTION	UNIT	TOLERANCE .XXX±.10, .XX±.15, .X±.25, ANG±1°	SCALE	SHEET	SIZE	REV.
	mm		1:1	1 OF 1	A4	X1