

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

## Product Specification

|              |             |             |
|--------------|-------------|-------------|
| ▶ Domestic   | Part Number | SN74LVC1G02 |
| ▶ Overseas   | Part Number | SN74LVC1G02 |
| ▶ Equivalent | Part Number | SN74LVC1G02 |

EV is the abbreviation of name EVVO

## General Description

The SN74LVC1G02 is a single 2-input NOR Gate in three tiny footprint packages.

## Features

- Tiny SC70-5 /SOT23-5 /DFN6(1.5mm\*1.0mm) Packages
- 2.4ns  $t_{PD}$  at 5V (typ)
- Source/Sink 24mA at 3.0V
- Over-Voltage Tolerant Inputs
- Designed for 1.65V to 5.5V  $V_{CC}$  Operation
- These Devices are Pb-Free and are RoHS Compliant

## Pin Configuration

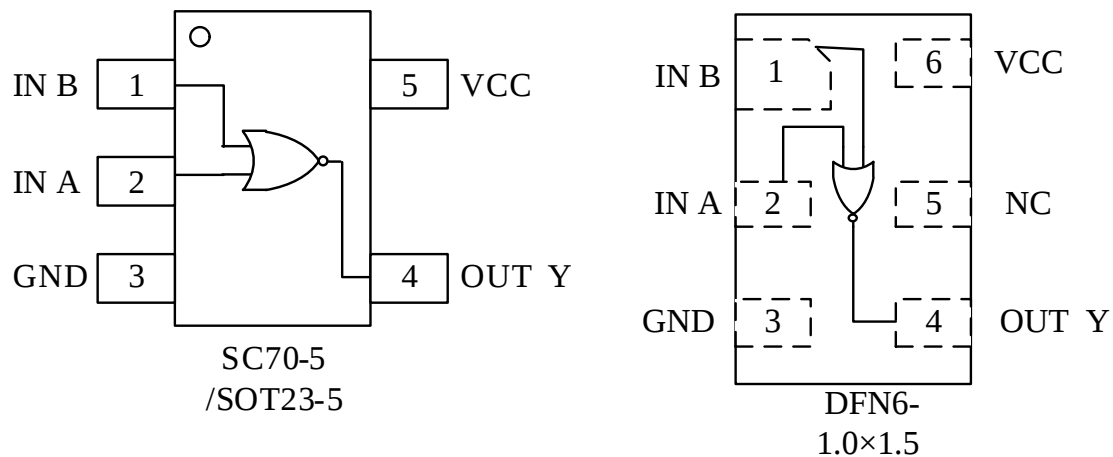


Figure1: Top View

## Pin Function

(SC70-5/ SOT23-5)

| PIN | FUNCTION |
|-----|----------|
| 1   | IN B     |
| 2   | INA      |
| 3   | GND      |
| 4   | Y        |
| 5   | VCC      |

## DFN6

| PIN | FUNCTION |
|-----|----------|
| 1   | IN B     |
| 2   | IN A     |
| 3   | GND      |
| 4   | Y        |
| 5   | NC       |
| 6   | VCC      |

## Block Diagram

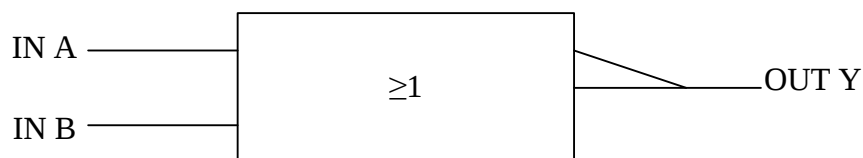


Figure2: Logic symbol

## Functional Description

### Function Table

| Input |   | Output |
|-------|---|--------|
| A     | B | Y      |
| L     | L | H      |
| L     | H | L      |
| H     | L | L      |
| H     | H | L      |

### Absolute Maximum Ratings

| Symbol        | Parameter                                                             | Value                     | Unit |
|---------------|-----------------------------------------------------------------------|---------------------------|------|
| $V_{CC}$      | DC Supply Voltage                                                     | -0.5 to 7.0               | V    |
| $V_I$         | DC Input Voltage                                                      | $-0.5 \leq V_I \leq +7.0$ | V    |
| $V_O$         | DC Output Voltage Output in Higher or Low State                       | -0.5 to $V_{CC} + 0.5$    | V    |
| $I_{IK}$      | DC Input Diode Current $V_I < GND$                                    | -50                       | mA   |
| $I_{OK}$      | DC Output Diode Current $V_O < GND, V_O > V_{CC}$                     | $\pm 50$                  | mA   |
| $I_O$         | DC Output Sink Current                                                | $\pm 50$                  | mA   |
| $I_{CC}$      | DC Supply Current per Supply Pin                                      | $\pm 100$                 | mA   |
| $I_{GND}$     | DC Ground Current per Supply Pin                                      | $\pm 100$                 | mA   |
| $T_{STG}$     | Storage Temperature Range                                             | -65 to 150                | °C   |
| $T_L$         | Lead Temperature, 1 mm from Case for 10 Seconds                       | 260                       | °C   |
| $T_J$         | Junction Temperature Under Bias                                       | 150                       | °C   |
| $\theta_{JA}$ | Thermal Resistance SC70-5                                             | 435                       | °C/W |
|               | SOT23-5                                                               | 300                       |      |
|               | DFN6                                                                  | 423                       |      |
| $P_D$         | Power Dissipation in Still Air at 85°C                                | 200                       | mW   |
| MSL           | Moisture Sensitivity                                                  | Level 1                   |      |
| ESD           | ESD Classification Human Body Model (Note 2)                          | 2000                      | V    |
|               | Machine Model (Note 3)                                                | 200                       |      |
|               | Charged Device Model (Note 4)                                         | N/A                       |      |
| $I_{Latchup}$ | Latchup Performance Above $V_{CC}$ and Below GND at 125°C<br>(Note 5) | $\pm 100$                 | mA   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. IO absolute maximum rating must be observed.
2. Tested to EIA/JESD22-A114-A, rated to EIA/JESD22-A114-B.
3. Tested to EIA/JESD22-A115-A, rated to EIA/JESD22-A115-A.
4. Tested to JESD22-C101-A.
5. Tested to EIA/JESD78.

### Recommended Operating Conditions

| Symbol     | Parameter                                           | Min  | Max | Unit |
|------------|-----------------------------------------------------|------|-----|------|
| $V_{CC}$   | DC Supply Voltage Operating                         | 1.65 | 5.5 | V    |
|            | Date Retention                                      | 1.5  | 5.5 |      |
| $V_{IN}$   | DC Input Voltage                                    | 0    | 5.5 | V    |
| $V_{OUT}$  | DC Output Voltage (High or Low State)               | 0    | 5.5 | V    |
| $T_A$      | Operating Temperature Range                         | -40  | 85  | °C   |
| $t_r, t_f$ | Input Rise and Fall Time $V_{CC} = 2.5 V \pm 0.2 V$ | 0    | 20  | ns/V |
|            | $V_{CC} = 3.0 V \pm 0.3 V$                          | 0    | 10  |      |
|            | $V_{CC} = 5.0 V \pm 0.5 V$                          | 0    | 5   |      |

## Electrical Characteristics

### DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter                                                   | Condition                                         | V <sub>CC</sub> (V)        | TA = 25 °C                                |                 |                                           | -40°C ≤ TA ≤ 85°C                         |                                           | Unit |
|------------------|-------------------------------------------------------------|---------------------------------------------------|----------------------------|-------------------------------------------|-----------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|------|
|                  |                                                             |                                                   |                            | Min                                       | Typ             | Max                                       | Min                                       | Max                                       |      |
| V <sub>IH</sub>  | High-Level Input Voltage                                    |                                                   | 1.65 to 1.95<br>2.3 to 5.5 | 0.75V <sub>CC</sub><br>0.7V <sub>CC</sub> |                 |                                           | 0.75V <sub>CC</sub><br>0.7V <sub>CC</sub> |                                           | V    |
| V <sub>IL</sub>  | Low-Level Input Voltage                                     |                                                   | 1.65 to 1.95<br>2.3 to 5.5 |                                           |                 | 0.25V <sub>CC</sub><br>0.3V <sub>CC</sub> |                                           | 0.25V <sub>CC</sub><br>0.3V <sub>CC</sub> | V    |
| V <sub>OH</sub>  | High-Level Output Voltage V <sub>IN</sub> = V <sub>IL</sub> | I <sub>OH</sub> = -100uA                          | 1.65 to 5.5                | V <sub>CC</sub> - 0.1                     | V <sub>CC</sub> |                                           | V <sub>CC</sub> - 0.1                     |                                           | V    |
|                  |                                                             | I <sub>OH</sub> = -3mA                            | 1.65                       | 1.29                                      | 1.52            |                                           | 1.29                                      |                                           |      |
|                  |                                                             | I <sub>OH</sub> = -8mA                            | 2.3                        | 1.9                                       | 2.1             |                                           | 1.9                                       |                                           |      |
|                  |                                                             | I <sub>OH</sub> = -12mA                           | 2.7                        | 2.2                                       | 2.4             |                                           | 2.2                                       |                                           |      |
|                  |                                                             | I <sub>OH</sub> = -16mA                           | 3.0                        | 2.4                                       | 2.7             |                                           | 2.4                                       |                                           |      |
|                  |                                                             | I <sub>OH</sub> = -24mA                           | 3.0                        | 2.3                                       | 2.5             |                                           | 2.3                                       |                                           |      |
|                  |                                                             | I <sub>OH</sub> = -32mA                           | 4.5                        | 3.8                                       | 4.0             |                                           | 3.8                                       |                                           |      |
| V <sub>OL</sub>  | Low-Level Output Voltage V <sub>IN</sub> = V <sub>IH</sub>  | I <sub>OH</sub> = 100uA                           | 1.65 to 5.5                |                                           | 0.0             | 0.1                                       |                                           | 0.1                                       | V    |
|                  |                                                             | I <sub>OL</sub> = 3mA                             | 1.65                       |                                           | 0.08            | 0.24                                      |                                           | 0.24                                      |      |
|                  |                                                             | I <sub>OL</sub> = 8mA                             | 2.3                        |                                           | 0.20            | 0.3                                       |                                           | 0.3                                       |      |
|                  |                                                             | I <sub>OL</sub> = 12mA                            | 2.7                        |                                           | 0.22            | 0.4                                       |                                           | 0.4                                       |      |
|                  |                                                             | I <sub>OL</sub> = 16mA                            | 3.0                        |                                           | 0.28            | 0.4                                       |                                           | 0.4                                       |      |
|                  |                                                             | I <sub>OL</sub> = 24mA                            | 3.0                        |                                           | 0.38            | 0.55                                      |                                           | 0.55                                      |      |
|                  |                                                             | I <sub>OL</sub> = 32mA                            | 4.5                        |                                           | 0.42            | 0.55                                      |                                           | 0.55                                      |      |
| I <sub>IN</sub>  | Input Leakage Current                                       | V <sub>IN</sub> = 5.5V or GND                     | 0 to 5.5                   |                                           | ±0.1            |                                           |                                           | ±1.0                                      | uA   |
| I <sub>OFF</sub> | Power Off Leakage Current                                   | V <sub>IN</sub> = 5.5V or V <sub>OUT</sub> = 5.5V | 0                          |                                           |                 | 1                                         |                                           | 10                                        | uA   |
| I <sub>CC</sub>  | Quiescent Supply Current                                    | V <sub>IN</sub> = 5.5V or GND                     | 5.5                        |                                           |                 |                                           |                                           | 10                                        | uA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AC ELECTRICAL CHARACTERISTICS

tr=tf= 3ns;

| Symbol                               | Parameter                          | Condition                                   | V <sub>CC</sub> (V) | TA = 25 °C |      |      | -40°C<br>≤TA≤85°C |      | Unit |
|--------------------------------------|------------------------------------|---------------------------------------------|---------------------|------------|------|------|-------------------|------|------|
|                                      |                                    |                                             |                     | Min        | Typ  | Max  | Min               | Max  |      |
| t <sub>PHL</sub><br>t <sub>PLH</sub> | Propagation Delay<br>(Figure3and4) | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15 pF | 1.65                | 2.0        | 10.1 | 12.9 | 2.0               | 13.9 | ns   |
|                                      |                                    |                                             | 1.8                 | 2.0        | 9.1  | 11.6 | 2.0               | 12.4 |      |
|                                      |                                    | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15 pF | 2.5±0.2             | 0.2        | 6.0  | 7.7  | 0.8               | 8.2  |      |
|                                      |                                    | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15 pF | 3.3±0.3             | 0.8        | 5.0  | 6.5  | 0.5               | 7.0  |      |
|                                      |                                    | R <sub>L</sub> = 500Ω C <sub>L</sub> =50 pF |                     | 1.2        | 5.6  | 7.1  | 1.5               | 7.6  |      |
|                                      |                                    | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15 pF | 5.0±0.5             | 0.5        | 4.4  | 5.6  | 0.5               | 6.1  |      |
|                                      |                                    | R <sub>L</sub> = 500Ω C <sub>L</sub> =50 pF |                     | 0.8        | 4.8  | 6.1  | 0.8               | 6.6  |      |

CAPACITIVE CHARACTERISTICS

| Symbol          | Parameter                                 | Condition                                                               | Typical | Unit |
|-----------------|-------------------------------------------|-------------------------------------------------------------------------|---------|------|
| C <sub>IN</sub> | Input Capacitance                         | V <sub>CC</sub> = 5.5 V,V <sub>I</sub> = 0 V or V <sub>CC</sub>         | >2.5    | pF   |
| C <sub>PD</sub> | Power Dissipation Capacitance<br>(Note 6) | 10MHz,V <sub>CC</sub> = 3.3 V, V <sub>I</sub> = 0 V or V <sub>CC</sub>  | 4       | pF   |
|                 |                                           | 10MHz, V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0 V or V <sub>CC</sub> | 4       |      |

6. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:

I<sub>CC(OPR)</sub>=C<sub>PD</sub>\*V<sub>CC</sub>\*fin+I<sub>CC</sub>\*C<sub>PD</sub> is used to determine the no-load dynamic power consumption;

P<sub>D</sub>=C<sub>PD</sub>\*V<sub>CC</sub><sup>2</sup>\*fin+I<sub>CC</sub>\*V<sub>CC</sub>\*Fig.

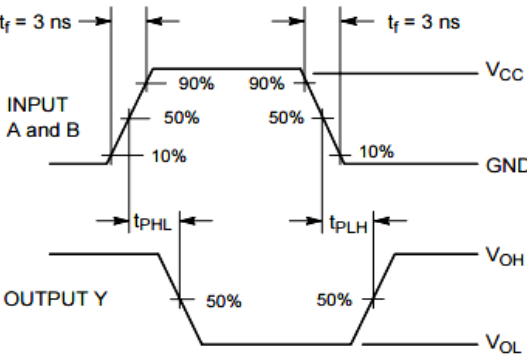


Figure 3. Switching Waveform


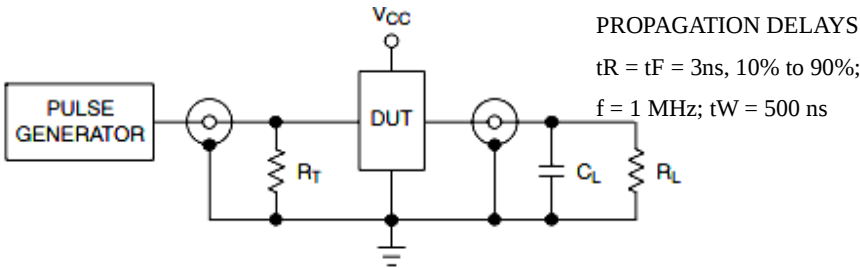


Figure 4. Test Circuit

## Package Dimension


SC70-5

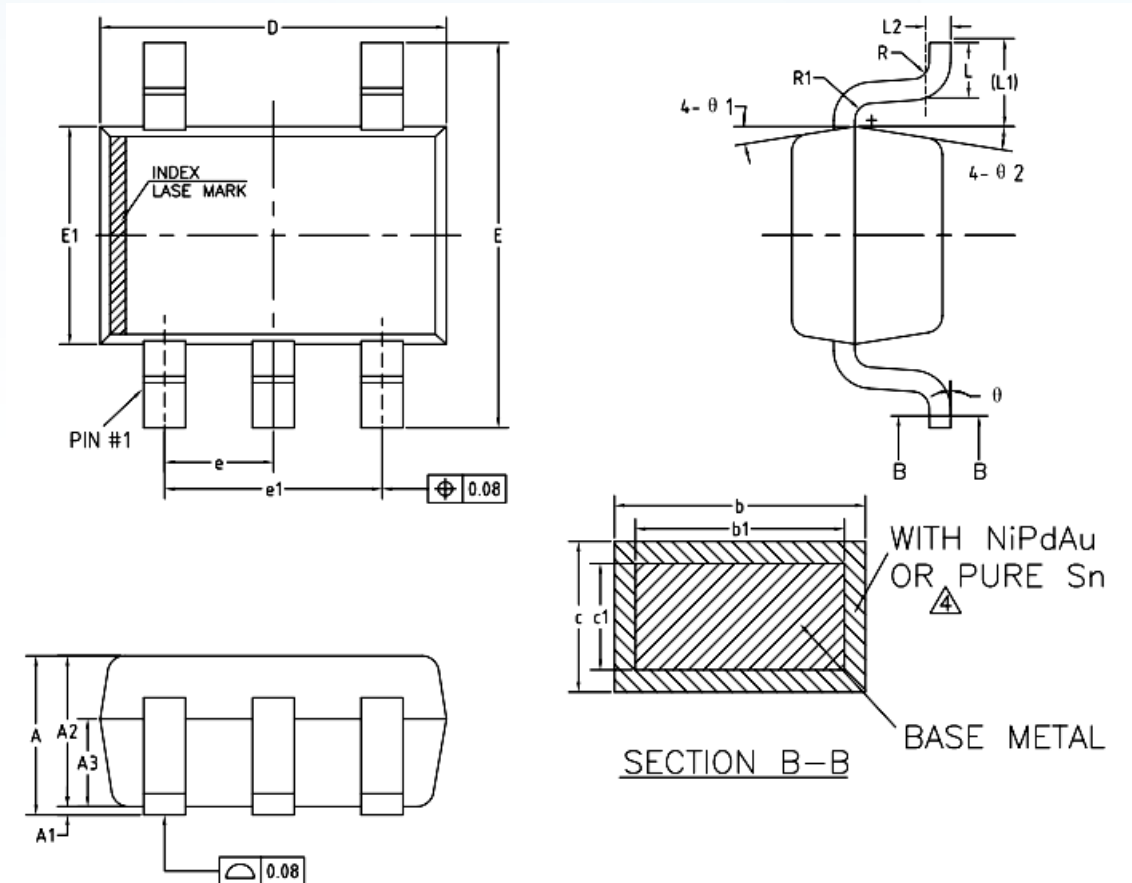

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

| SYMBOL | MIN          | NOM  | MAX  |
|--------|--------------|------|------|
| A      | 0.85         | —    | 1.05 |
| A1     | 0            | —    | 0.10 |
| A2     | 0.80         | 0.90 | 1.00 |
| A3     | 0.47         | 0.52 | 0.57 |
| b      | NiPdAu 0.22  | —    | 0.29 |
|        | PURE Sn 0.23 | —    | 0.33 |
| b1     | 0.22         | 0.25 | 0.28 |
| c      | NiPdAu 0.115 | —    | 0.15 |
|        | PURE Sn 0.12 | —    | 0.18 |
| c1     | 0.115        | 0.13 | 0.14 |
| D      | 2.02         | 2.07 | 2.12 |
| E      | 2.20         | 2.30 | 2.40 |
| E1     | 1.25         | 1.30 | 1.35 |
| e      | 0.60         | 0.65 | 0.70 |
| e1     | 1.20         | 1.30 | 1.40 |
| L      | 0.28         | 0.33 | 0.38 |
| L1     | 0.50REF      |      |      |
| L2     | 0.15BSC      |      |      |
| R      | 0.10         | —    | —    |
| R1     | 0.10         | —    | 0.25 |
| θ      | 0°           | —    | 8°   |
| θ 1    | 6°           | 9°   | 12°  |
| θ 2    | 6°           | 9°   | 12°  |


## SOT23-5

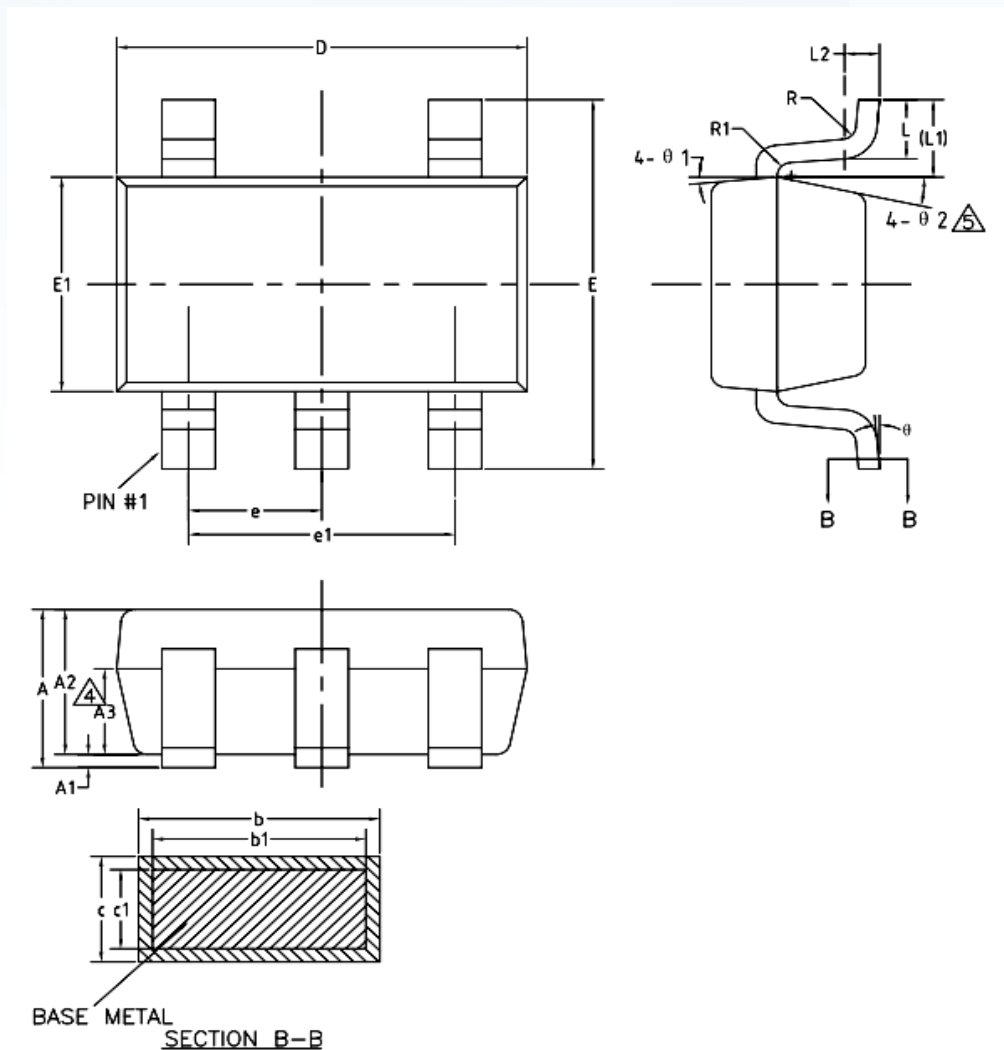

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

| SYMBOL | MIN     | NOM   | MAX   |
|--------|---------|-------|-------|
| A      | —       | —     | 1.25  |
| A1     | 0       | —     | 0.15  |
| A2     | 1.00    | 1.10  | 1.20  |
| A3     | 0.60    | 0.65  | 0.70  |
| b      | 0.36    | —     | 0.50  |
| b1     | 0.36    | 0.38  | 0.45  |
| c      | 0.14    | —     | 0.20  |
| c1     | 0.14    | 0.15  | 0.16  |
| D      | 2.826   | 2.926 | 3.026 |
| E      | 2.60    | 2.80  | 3.00  |
| E1     | 1.526   | 1.626 | 1.726 |
| e      | 0.90    | 0.95  | 1.00  |
| e1     | 1.80    | 1.90  | 2.00  |
| L      | 0.35    | 0.45  | 0.60  |
| L1     | 0.59REF |       |       |
| L2     | 0.25BSC |       |       |
| R      | 0.10    | —     | —     |
| R1     | 0.10    | —     | 0.25  |
| θ      | 0°      | —     | 8°    |
| θ 1    | 3°      | 5°    | 7°    |
| θ 2    | 6°      | —     | 14°   |

## DFN6

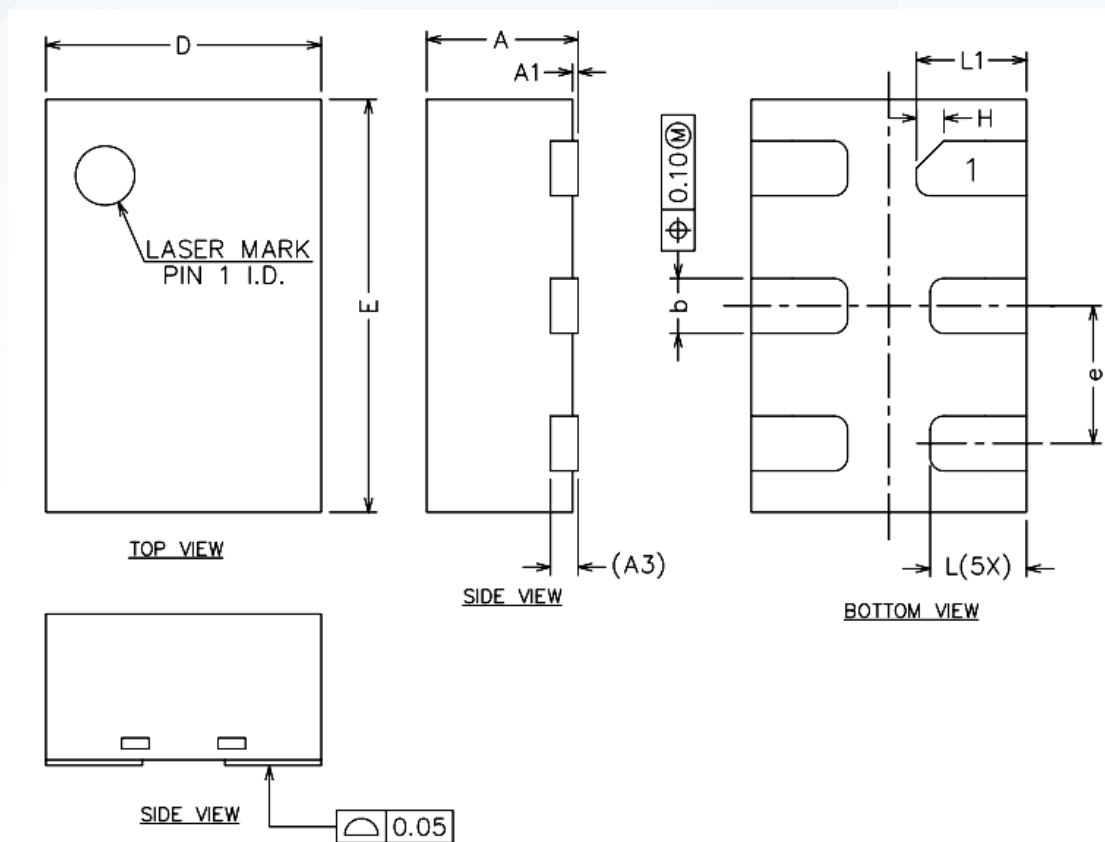

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

| SYMBOL | MIN     | NOM  | MAX  |
|--------|---------|------|------|
| A      | 0.50    | —    | 0.60 |
| A1     | 0.00    | 0.02 | 0.05 |
| A3     | 0.10REF |      |      |
| b      | 0.15    | 0.20 | 0.25 |
| D      | 0.90    | 1.00 | 1.10 |
| E      | 1.40    | 1.50 | 1.60 |
| e      | 0.40    | 0.50 | 0.60 |
| H      | 0.10REF |      |      |
| L      | 0.30    | 0.35 | 0.40 |
| L1     | 0.35    | 0.40 | 0.45 |

**Ordering information**

| Order code      | Marking code | Package | Baseqty | Deliverymode  |
|-----------------|--------------|---------|---------|---------------|
| SN74LVC1G02DBVR | C02J         | SOT23-5 | 3000    | Tape and reel |
| SN74LVC1G02DCKR | CBK          | SC70-5  | 3000    | Tape and reel |
| SN74LVC1G02DRYR | CB           | DFN6    | 5000    | Tape and reel |

## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.