
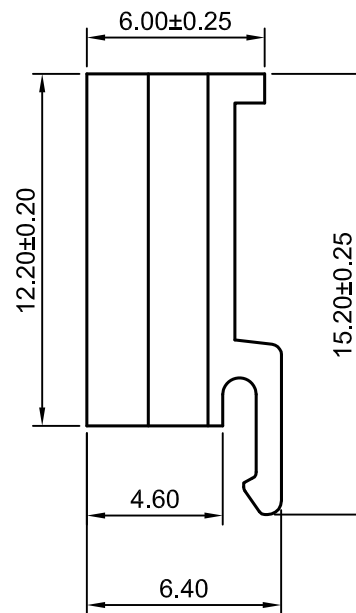
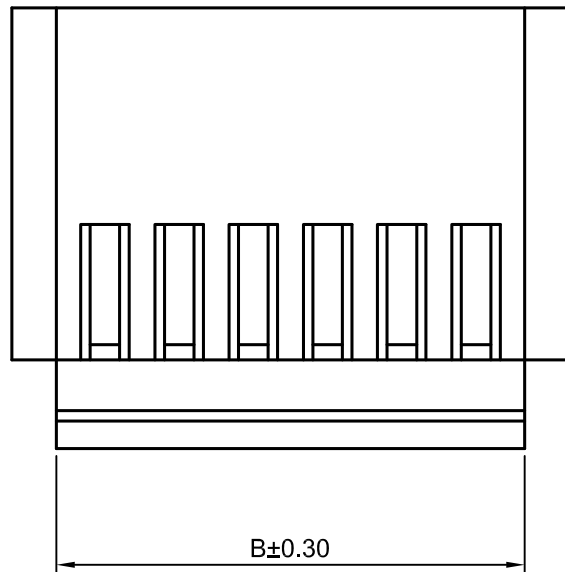


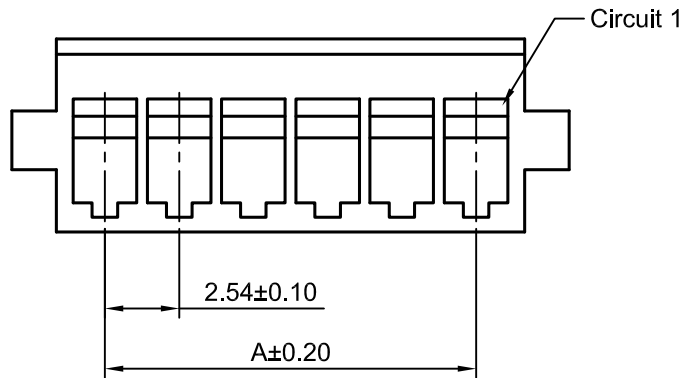

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 15mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.90	14P	32.50	35.90
3P	5.00	8.40	15P	35.00	38.40
4P	7.50	10.90	16P	37.50	40.90
5P	10.00	13.40	17P	40.00	43.40
6P	12.50	15.90	18P	42.50	45.90
7P	15.00	18.40	19P	45.00	48.40
8P	17.50	20.90	20P	47.50	50.90
9P	20.00	23.40	21P	50.00	53.40
10P	22.50	25.90	22P	52.50	55.90
11P	25.00	28.40	23P	55.00	58.40
12P	27.50	30.90	24P	57.50	60.90
13P	30.00	33.40	25P	60.00	63.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1			
DRAWN	CHKD	APPR	2.54mm PITCH		
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
A0	NEW RELEASE	2005.05.10			
REV	DESCRIPTION	DATE	DRAWING NO.		
			A2504H-XP		
			REV A0		