

Ordering Information:

C4201HF-XP - ** - ** - **
1 2 3 4

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2(Natural)

V0:Nylon 66 UL94V-0(White)

GWT:Nylon 66 UL94V-0(Beige),IEC
60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):see section 2 material

BK:Black

RD:Red

YL:Yellow






BL:Blue

GN:Green


4.Logo & Marking:

(Blank): Without LOGO

CJT: With LOGO

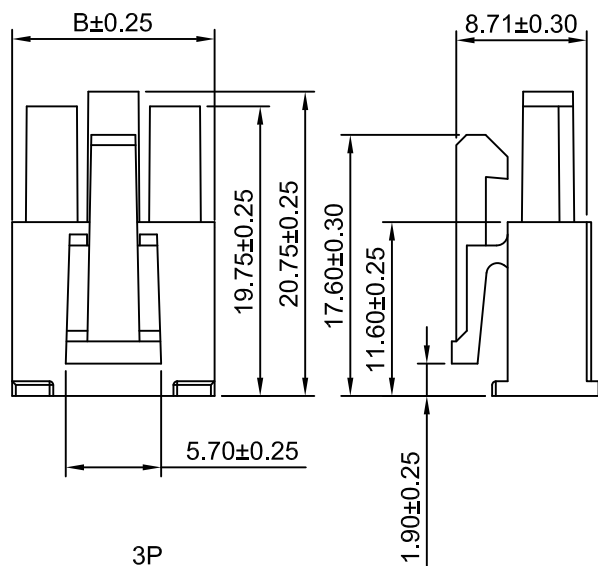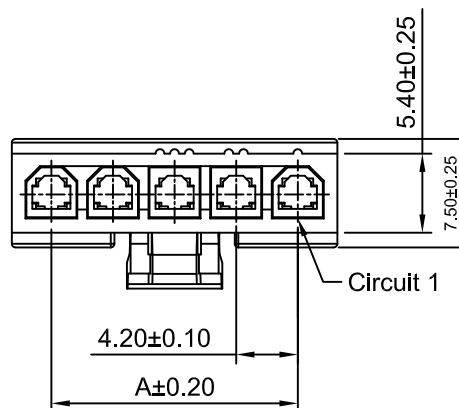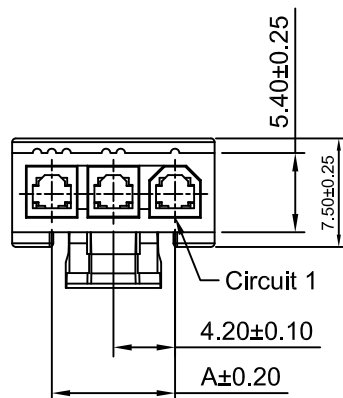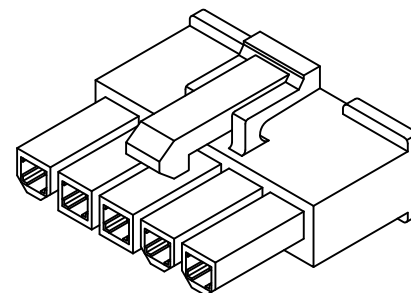

3P

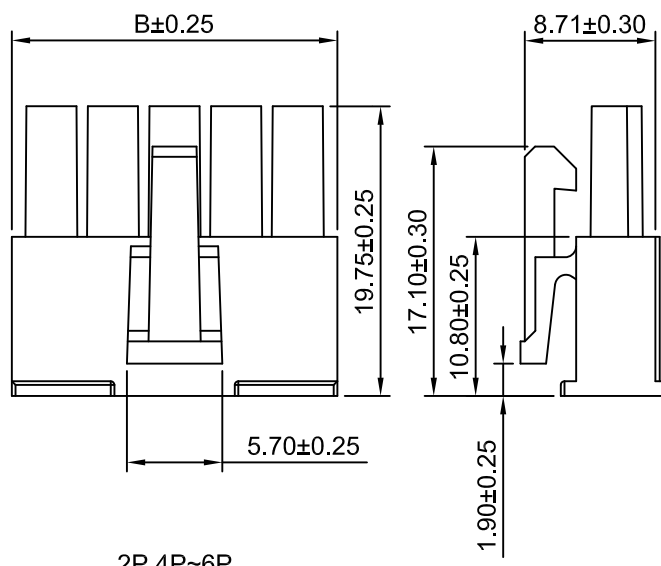

2P,4P~6P

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	5P	16.80	22.20
3P	8.40	13.80	6P	21.00	26.40
4P	12.60	18.00			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2:1		1 of 1			
DRWN		CHK'D		APPR		4.20mm Pitch Single Row Housing	
Wenmin Luo		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
						C4201HF-XP	
						REV A5	

Notes:

Dimensions Shown Represent Product In Dry, As Molded.Condition.Additional 2% Growth Due To Subsequent Moistureabsorption May Occur And Should Be Accounted For.