

Ordering Information:

A1252WV-S-XP - ** - G
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 6T,UL94V-0







GWT: Nylon 6T,UL94V-0(Beige),IEC

60335-1,5th Edition Glow Wire Capable.


3.Finish:

(blank): Tin over Nickel


G: Gold over Nickel

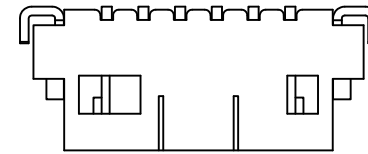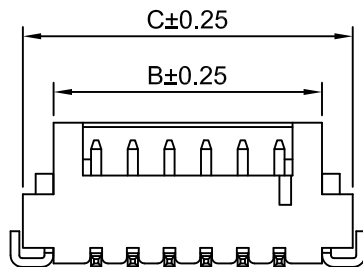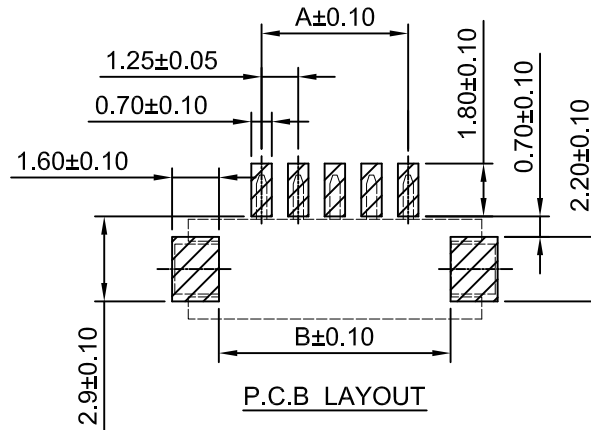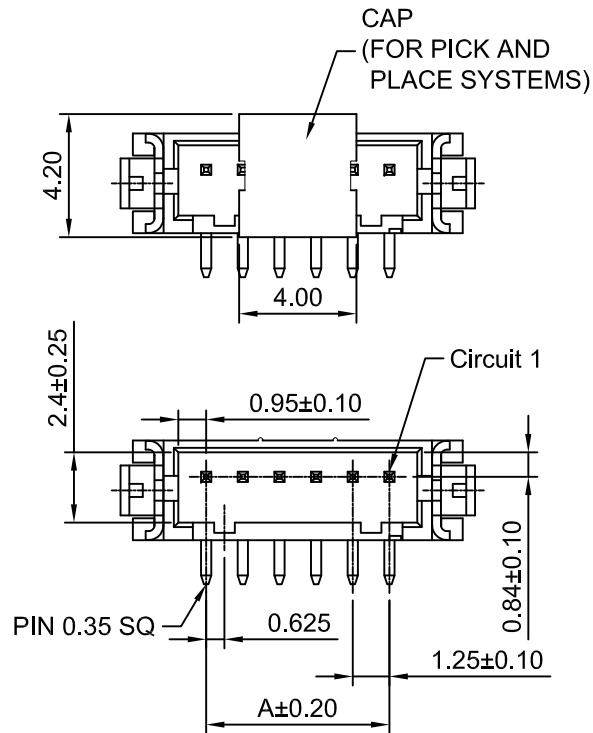

4P~15P



2P~3P



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Solder Tabs:Phosphor Bronze/Gold over Nickel(Au:1u"MIN)

Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	4.15	6.25	9P	10.00	12.90	15.00
3P	2.50	5.40	7.50	10P	11.25	14.15	16.25
4P	3.75	6.65	8.75	11P	12.50	15.40	17.50
5P	5.00	7.90	10.00	12P	13.75	16.65	18.75
6P	6.25	9.15	11.25	13P	15.00	17.90	20.00
7P	7.50	10.40	12.50	14P	16.25	19.15	21.25
8P	8.75	11.65	13.75	15P	17.50	20.40	22.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet

mm 4:1 1 of 1

DRWN CHK'D APPR

Wenmin Luo Diankui Wan Jack Yin

General Tolerances

THIRD ANGLE PROJECTION

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

TITLE

1.25mm PITCH

180° WAFER - SMT TYPE

DRAWING NO.

A1252WV-S-XP-G

REV

A0

A1	CHANGE THE DRAWING	2021.03.18
A0	NEW RELEASE	2012.08.23
REV	DESCRIPTION	DATE