

Feature Stories



Lightweight
Aluminum
Cable
Performs

[Find by Feature](#)
[Browse by Category](#)
[Share](#)
 [Search →](#)

[Search Results \(0\)](#)
[Search Options](#)


Select a product type to narrow your search:

Results with your selections: --

[Clear](#)
[Search →](#)

Female Metri-Pack 480 Tin Plated Terminal, Cable Insulation Range 3.20 - 3.04 mm

Part #12052221

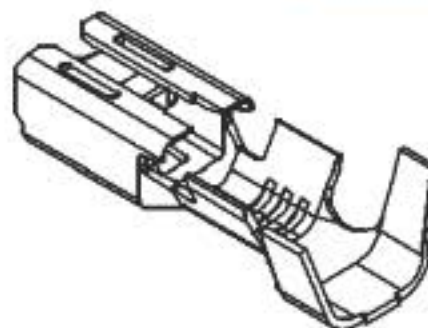

Question about this product?

[Attributes](#)
[Documents \(7\)](#)

Part #:	12052221
Description:	Female Metri-Pack 480 Tin Plated Terminal, Cable Insulation Range 3.20 - 3.04 mm
Product Type:	Terminal
Status:	Active
Blade size [mm]:	4.8
Terminal family:	Metri-Pack
Series:	480
Gender:	Female
Sealed:	Unsealed
Material:	Tin Brass
Plating:	Tin
Minimum Cable Core Cross Section [mm2]:	3.00
Maximum Cable Core Cross Section [mm2]:	3.00
Minimum Cable Diameter [mm]:	3.04
Maximum Cable Diameter [mm]:	3.20
Current range [A]:	42