


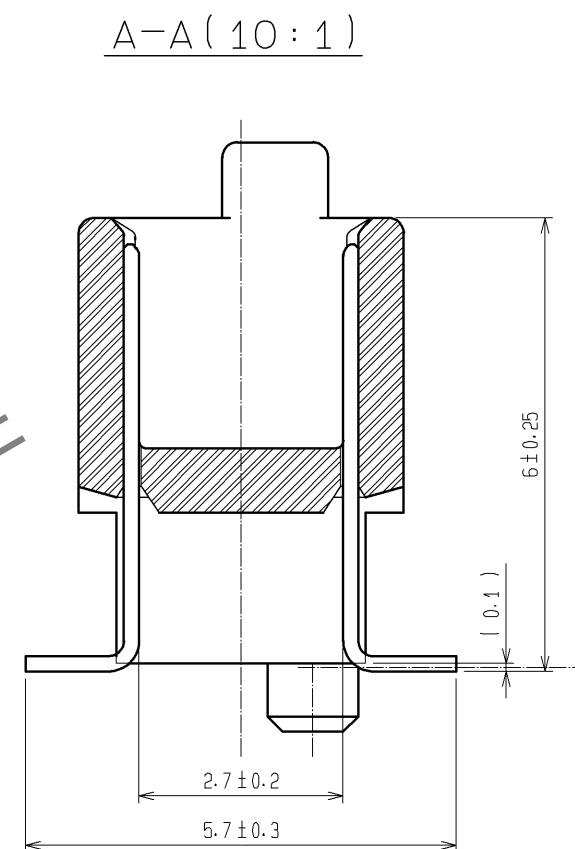

NOTE 1 HRS MARK SHALL BE OPTIONAL.

2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.


3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.

5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.

6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB(MOUNTING SIDE)

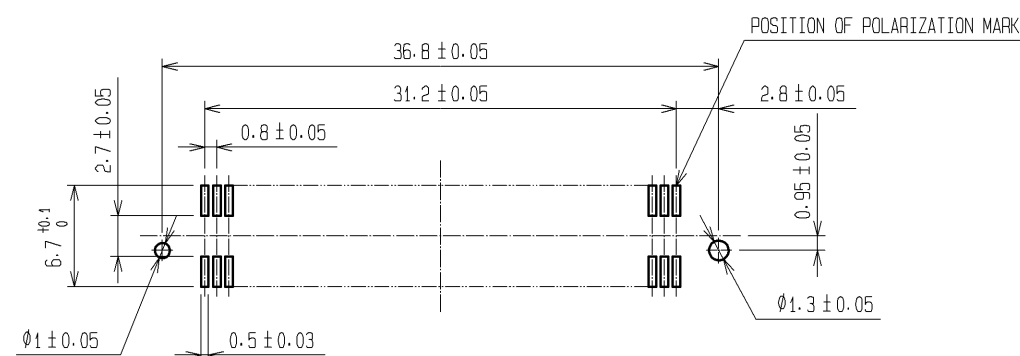

1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.	
						LEAD AREA:TIN-PLATING 1μm min.	
						UNDER PLATING:NICKEL 1μm min.	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED
							CHECKED
							DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	07. 06. 20	DRAWING NO.	EDC3-084973-23		
		CHECED : HS. OZAWA	07. 06. 20	PART NO.	FX6-80P-0. 8SV2 (93)		
		DESIGNED : KT. DOI	07. 06. 20	CODE NO.	CL576-0047-4-93		
		DRAWN : TS. MIYAKI	07. 06. 18				

