
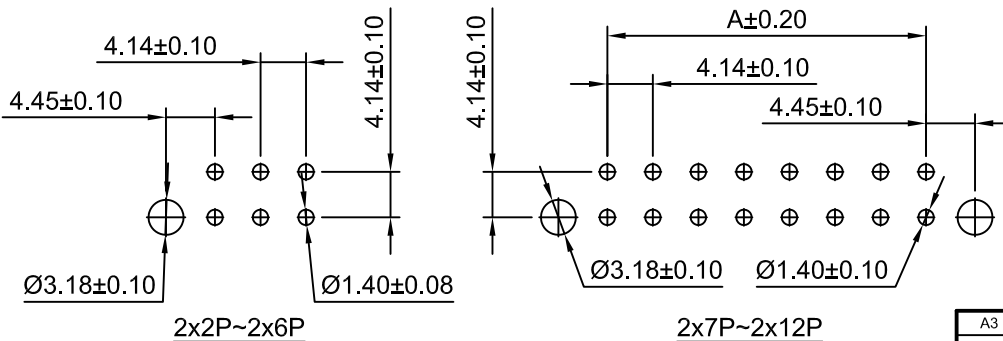


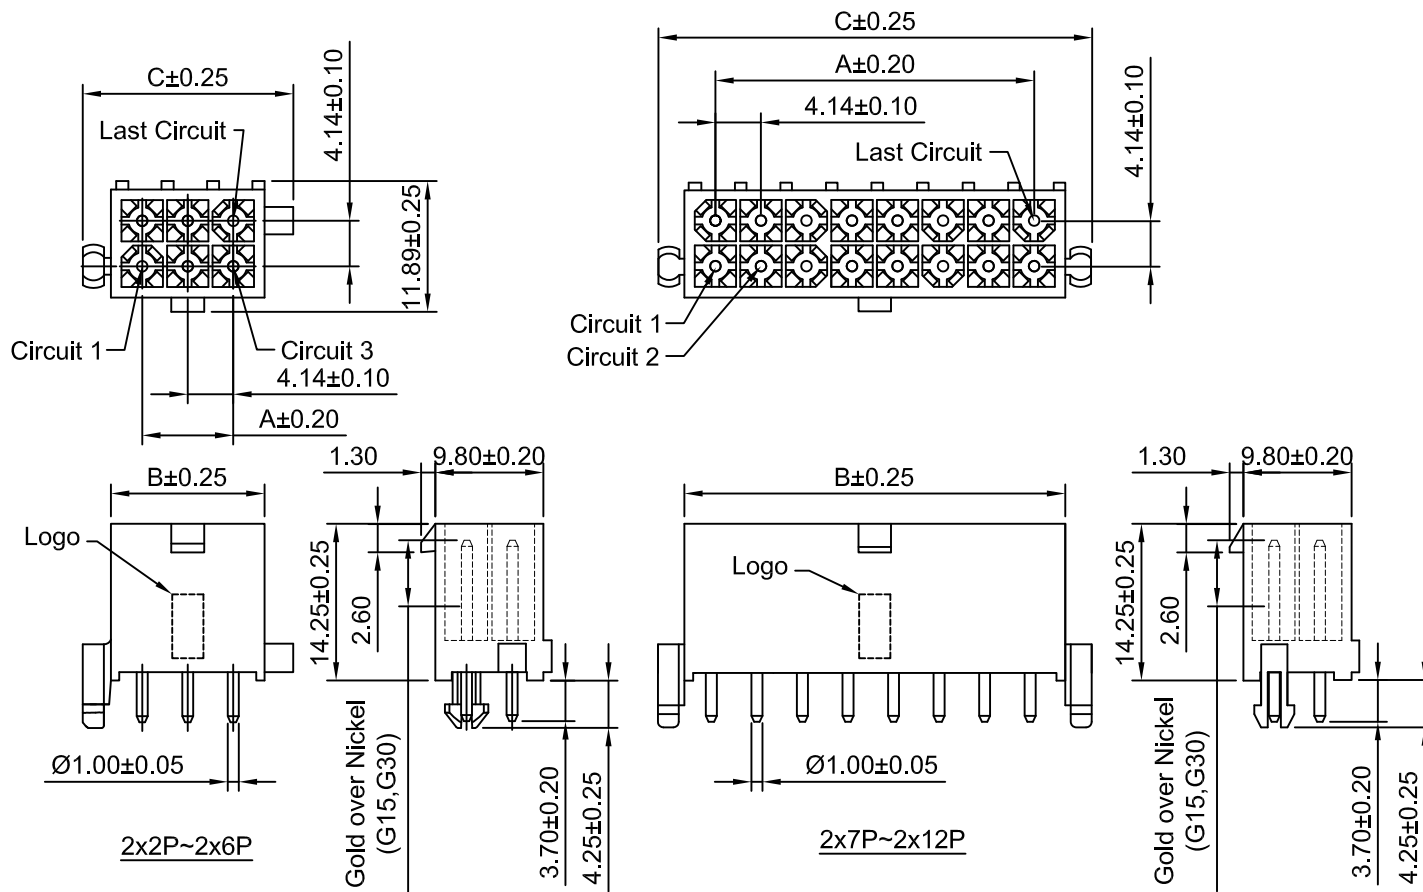

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

C4140WV-2xXP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0 (White)

46: Nylon 46,UL94V-0 (Ivory)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating: 9.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C4140WV-2x2P	4.14	9.83	15.01
C4140WV-2x3P	8.28	13.97	19.15
C4140WV-2x4P	12.42	18.11	23.29
C4140WV-2x5P	16.56	22.25	27.43
C4140WV-2x6P	20.70	26.39	31.57
C4140WV-2x7P	24.84	30.56	35.71
C4140WV-2x8P	28.98	34.70	39.85
C4140WV-2x9P	33.12	38.84	43.99
C4140WV-2x10P	37.26	42.98	48.13
C4140WV-2x11P	41.40	47.12	52.27
C4140WV-2x12P	45.54	51.26	56.41

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	1:5:1	1 of 2	4.14mm PITCH VERTICAL DIP WAFER		
DRAWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4140WV-2xXP		REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
					

A3	CHANGE THE DRAWING	2022.02.17
A2	CHANGE SIZE C	2021.01.16
A1	CHANGE THE DRAWING	2020.09.09
A0	NEW RELEASE	2015.04.13
REV	DESCRIPTION	DATE