




Technical Data

22.01.2024

Shrinkable markers "Continuous Tube", thermal transfer
TLFX – 2:1 Rail Limited Fire Hazard

TLFX64WH

Article Number 554-51300

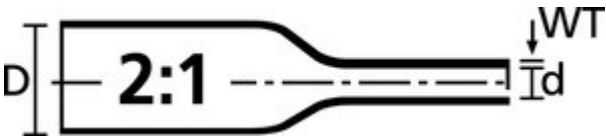

Material: Polyolefin, cross-linked (PO-X)
Colour: White (WH)

Supplied Ø D min.: 6.4 mm
Recov. Ø d max.: 3.2 mm
Wall (WT): 0.61 mm
Shrink Ratio: 2:1
Min. Shrink Temperature - °C: +70 °C

Operating Temperature : -55 °C to +125 °C

Test Method

Tensile Strength: 12 MPa ASTM D2671
Elongation at break: 4.5 ASTM D2671
Longitudinal Change After Shrinkage: -6%

We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved



Technical Data

22.01.2024

Shrinkable markers "Continuous Tube", thermal transfer
TLFX – 2:1 Rail Limited Fire Hazard

Print Method: thermal transfer print
Print Method (Alternative): laser beam print
Application Tool: H6100, TT431, TT4030, TT4030DS



We assume no responsibility that the Product will be used for the intended purpose, this is beyond our control. It's up to the customer to check the suitability for a specific application by means of tests. Technical changes and errors reserved