Panel Potentiometer

Model P110 Series

Electronics

Features:

- 11 mm rotary
- Insulated shaft
- Conductive plastic element
- With/without bushing





Model	Styles	Available
-------	---------------	------------------

Side Adjust, PCB pins	P110KV
Side Adjust , PCB pins, with Bushing	P110KV1
Top Adjust, PCB pins	P110KH
Top Adjust, PCB pins, with Bushing	P110KH1

Electrical

Resistance Range, Ohms	500-1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.05
Dielectric Strength	500Vac, I minute
Insulation Resistance, Minimum	100M ohms at 500Vdc
Sliding Noise	100mV max.
Actual Electrical Travel, Nominal	260°

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	40 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental

Operating Temperature Range	-20°C to +70°C
Rotational Life	30,000 cycles


Issue A 11/2016 Page 1

Panel Potentiometer


Model P110 Series



Ordering

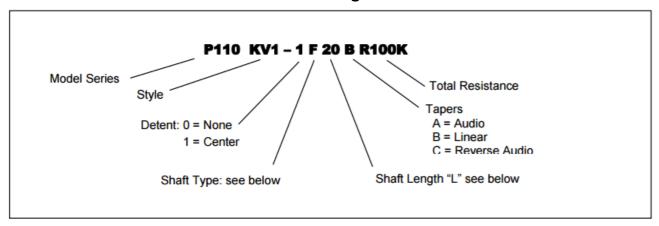


Shaft Types

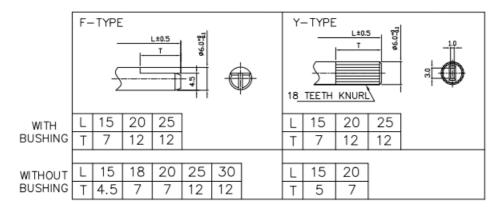

STANDARD RESISTANCE VALUES, OHMS

500	1K	2K	5K	10K	20K	50K	100K	200K	500K	1MEG

CIRCUIT DIAGRAM




Issue A 11/2016 Page 2

Model P110 Series




Outline Drawings

Model P110KV (Side Adjust, PCB pins)

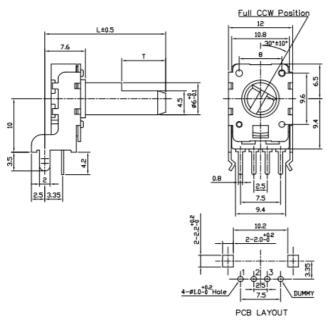

Model P110KV1 (Side Adjust, PCB pins, with Bushing)

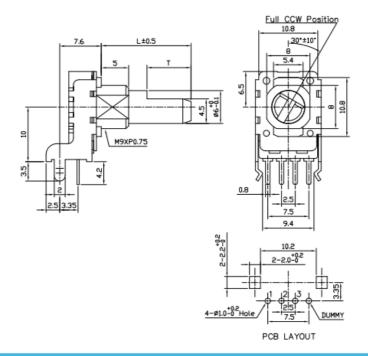


Panel Potentiometer

Model P110 Series




Outline Drawings

Model P110KH (Top Adjust, PCB pins)

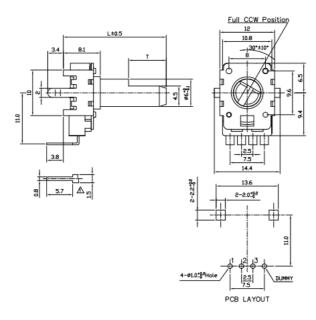

Model P110KH1 (Top Adjust, PCB pins, with Bushing)

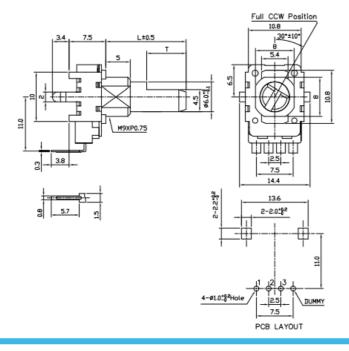

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

 P232-DFC25BR10K
 P110KH10Y15BR100K
 P230-1FD20BR10K
 P110KH-0F20BR10K
 P110KH-1F20AR500K

 P110KV1-0F25AR1K
 P110KV1-0FAR10K
 P110KH1-0Y15BR100K
 P110KV1-0F20BR50K
 P110KH-0F25BR20K

 P110KH1-1F15BR1K
 P140KH1-F20CR50K
 P110KH1-1F15BR200K
 P110KH1-1Y15BR10K
 P110KH1-0F15BR20K

 P110KV1-0Y15CR500
 P110KH1-1F15BR20K
 P110KH1-1Y15BR10K
 P110KH1-1F15BR20K