Model P08x Series

Features:

- 8 mm square
- **Dust proof**
- **Detent option**
- 100,000 cycle life
- Rotary switch option
- Multiple gangs available





Ρb	RoHS 2
	RoHS 2 compliant

Model Styles Available

Side Adjust, Potentiometer Module (Up to 4 gangs)	P08xN
Side Adjust, Potentiometer with Rotary Switch Module (Up to 4 gangs)	P08xS
Side Adjust, Potentiometer with Dual Shaft Module (2 or 4 gang)	P08xD
Side Adjust, Potentiometer with Dual Shaft and Rotary Switch Module (2 or 4 gang)	P08xE

Electrical

Resistance Range, Ohms	500 -1M (for "B" taper) 1K-1M (for other tapers)
Standard Resistance Tolerance	± 20%
Residual Resistance, Maximum	50 ohms
Input Voltage, Maximum	50 Vac
Power rating, Watts	0.05W- B taper, 0.025W- others
Dielectric Strength	300Vac, sea level
Insulation Resistance, Minimum	100 Megohms
Gang Error (Multi-ganged), Maximum	+/-3 dB (-40 dB to 0dB)
Actual Electrical Travel, Nominal	With Switch = 230° Without Switch =270°
Switch Contact Resistance, Maximum	100 milliohms max.
Switch Power Rated	3.0A at 16Vdc

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	42 oz-in
Rotational Torque, Maximum	0.7 oz-in (0.2 oz-in each additional gang)
Switch Detent,	1.0 oz-in
Switch Travel angle	50°

Model P08x Series




Environmental


Operating Temperature Range		-55°C to +125°C
Rotational Life	Switch = 30,000 cycles	Potentiometer = 100,000 cycles
IP Rating		Dust Proof = IP50

Ordering

P08xN - POTENTIOMETER MODULE

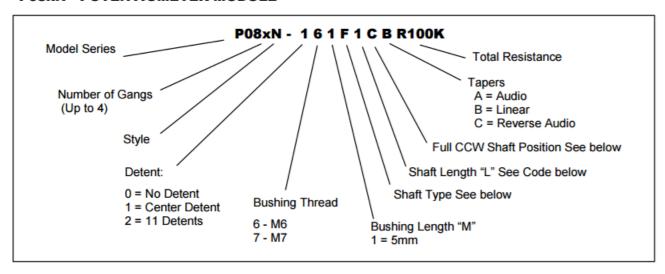


P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

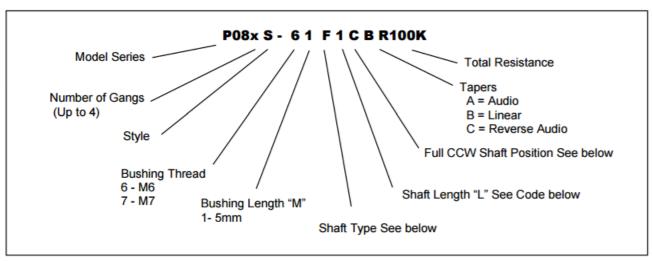


Model P08x Series



P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

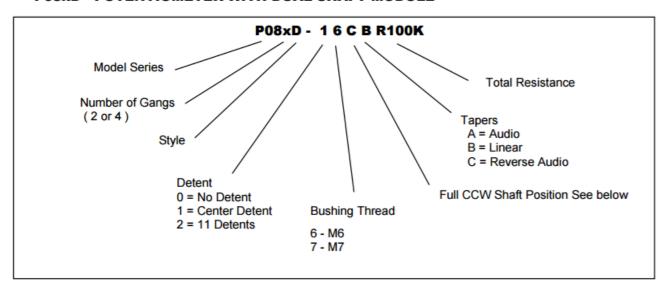

P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE

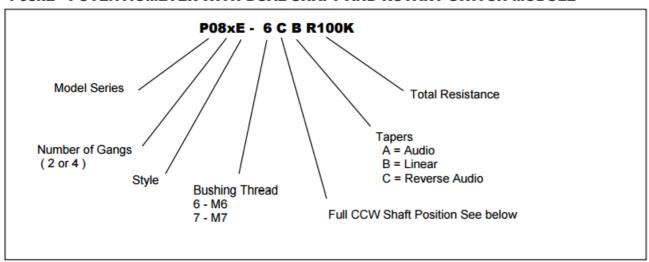



Issue A 11/2016 Page 3

Model P08x Series




Shaft Length "L" Code - For Models P08xN and P08xS only





Shaft Position (F-Type Shaft)

Dashed lines on Type "C" and Type "A" shows position of adjustment slot for S-Type

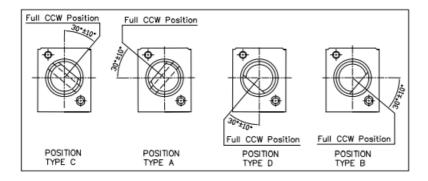


STANDARD RESISTANCE VALUES, OHMS 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG


Model P08x Series



P08xN - POTENTIOMETER MODULE

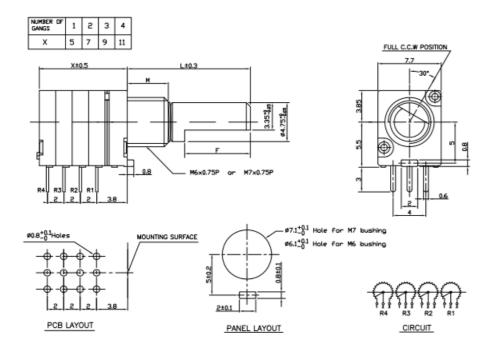

P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

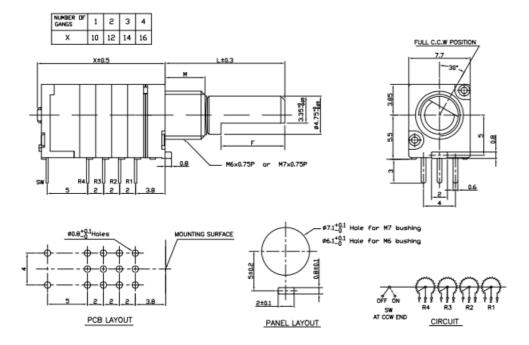


Model P08x Series




P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

2 GANG

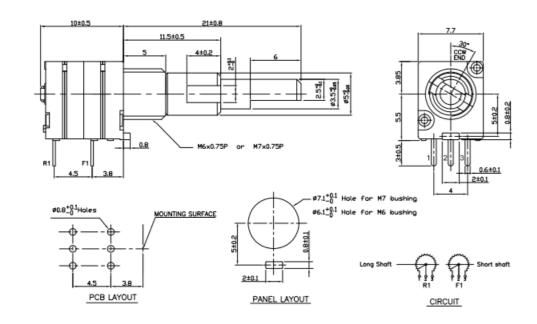

4 GANG

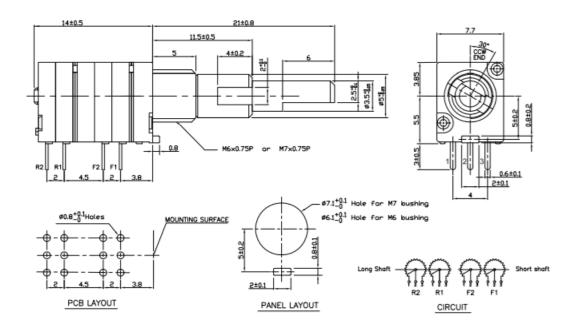


Model P08x Series




P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE


2 GANG

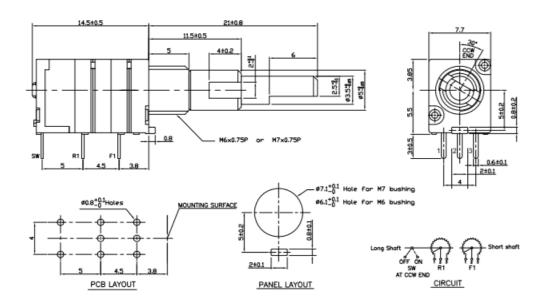

4 GANG

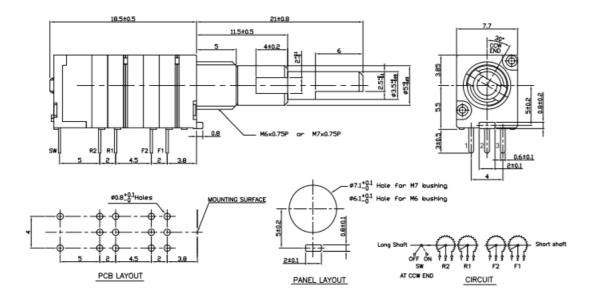



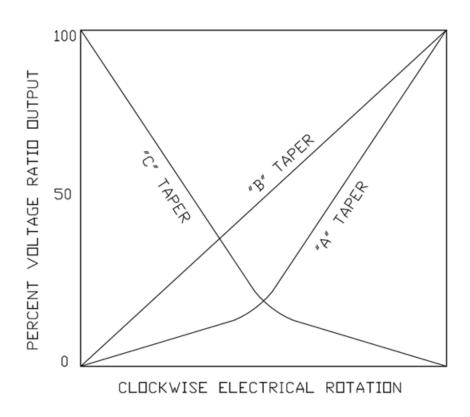

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

P081N-271F2CBR10K P081S-71F2CAR10K P082D-27CBR10K P081N-061F2BBR100K P081N-061F2ABR100K P081N-061F2BAR10K P081N-061F2AAR100K P081S-71S2CAR10K P084E-7CBR10K P082S-61F1DBR10K P084D-071S3CCR10K P082N-261F1DBR10K P084N-061F2DAR50K P083N-071S1CBR1K P082E-6CAR50K P082D-16CAR50K P082N-161F4CBR100K P081N-261F2BBR10K P081N-271F2CAR10K P084N-061F1CAR10K P082S-61F4CAR50K P081N-071S3CBR10K P082N-271F2CBR10K P081NS-71F2CAR10K P082N-071F2CAR100K P082N-261F2BCR100K P081N-261F2BCR100K P081NS-71F2CAR100K P081N-071S3CBR10K P082N-061F2BCR100K P081S-61F3DBR100K P081N-061F2ACR100K P082N-061F2BCR100K P081S-61F3DBR100K P081S-61F3DBR100K P081S-61F3DBR10K