
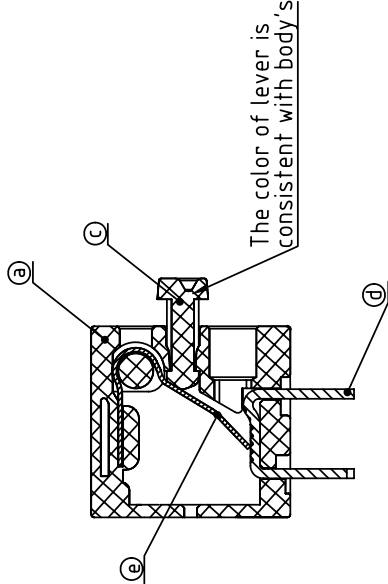
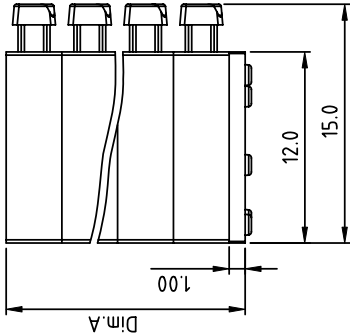
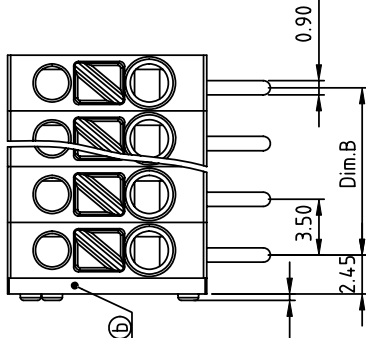


RECOMMENDED P.C.B LAYOUT
TOP VIEW

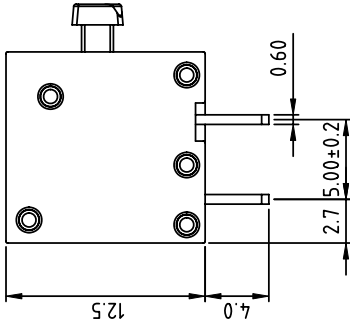

- Material:
- ItemⒶ Terminal housing: Thermoplastic (UL94V-0)
 - ItemⒷ Terminal cover: Thermoplastic (UL94V-0)
 - ItemⒸ Lever: Thermoplastic (UL94V-0)
 - ItemⒹ Solder pin : Brass, Tin plated
 - ItemⒺ Spring : Stainless steel

- Electrica cULus
- Voltage rating: AC 300V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus

PART NO.: HX xx 23 x 1 00J0 G

N=Number of poles
Dim.A=N×3.5+1.0
Dim.B=(N-1)×3.5

Poles	Dim.A	Dim.B
2-6p	±0.20	±0.15
7-12p	±0.25	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

- End stackable 0 Black (RAL9005)
No. of poles 2 Red (RAL3001/D) In copper Alloy
02 2 poles 3 Orange(RAL2011/P)
03 3 poles 4 Yellow(RAL1018/A)
... .. 5 Green(RAL6018/T)
24 24 poles 6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors
- Color
RoHS compliant (lead<4%)

mat'l. code		surface	tolerance	projection	product family	terminal block
litr	ecn no/dr	date	ASME Y14.5 ✓ tolerances unless otherwise specified		title	
			angles X.X±0.3	MM	TERMINAL BLOCK	
			X'±1°	scale	SPRING CLAMP, 180D WIRE INLET DOUBLE CONTACT B TYPE	
			dr EVIN ZHONG 052614		dwg no	sheet 1 of 1 size
			enfr EVIN ZHONG 052614			A4
			chr HANKE FENG 052614			
			appt SHI JUN 052614			
sheet index	revision A				type	CUSTOMER Drawing
	sheet 1					