





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.29	阿树

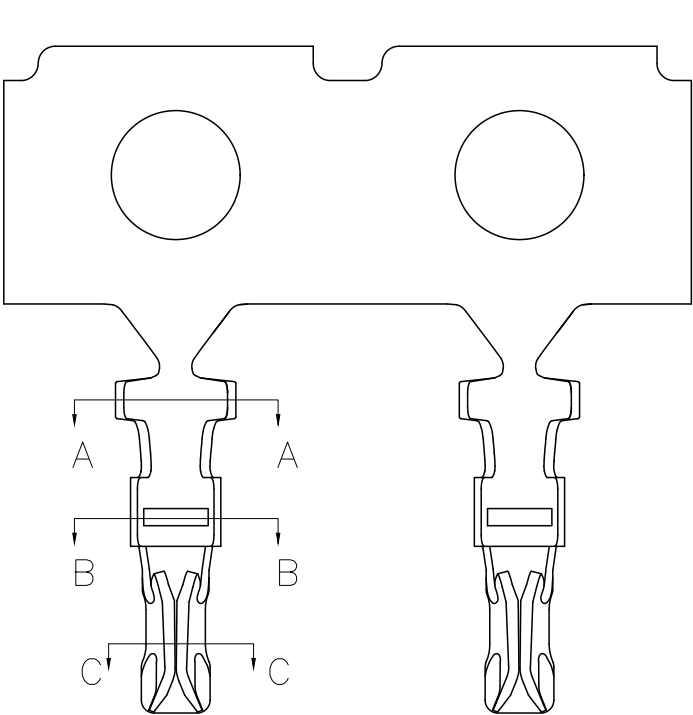

SEC:A-A



SEC:B-B

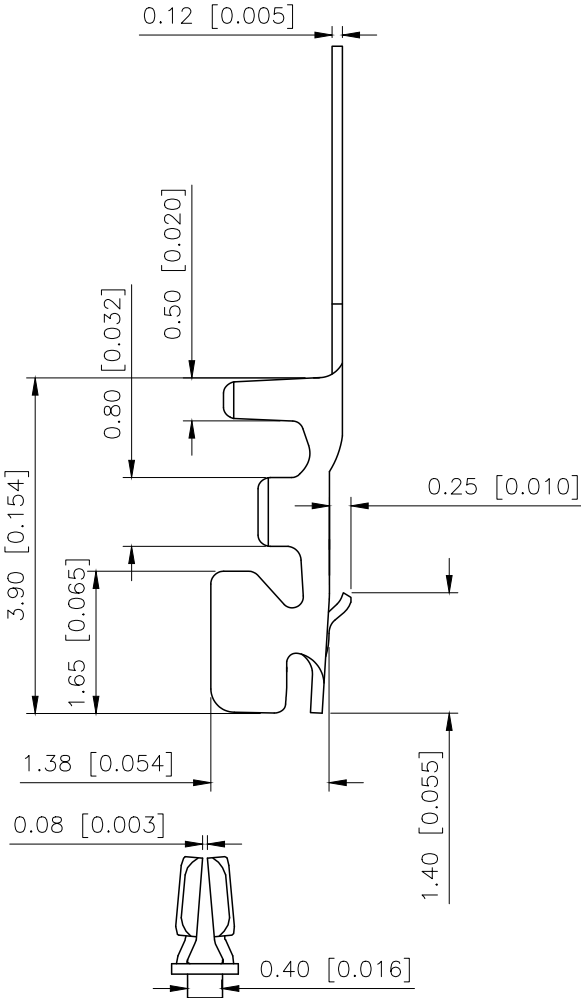

SEC:C-C

■SPECIFICATIONS

- Voltage rating:50V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
- Material: Phosphor Bronze
Finish:Plated Tin over Nickel
Applicable wires :AWG#28-#32
Insulation O.D.0.4 to 0.8mm

PART NO.:

X1011 I-P SN
① ② ③ ④

- 1.Series No
- 2.Category:T-Terminal
- 3.Material:P-Phosphor bronze
- 4.Plating style:SN-Bright tin plating

X1011T-PSN	Phosphor bronze	Tin	X1011W	X1011H
PART NO	Material	Plating	Suitable XKB Wafer	Suitable XKB Housing

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.0mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X1011T-PSN
APPROVED		SIZE:	A4	DWG NO.:	