


NOTES:

1. MATERIALS:  
CONTACT: BERYLLIUM COPPER  
ALL OTHER METAL PARTS: STAINLESS STEEL  
INSULATOR: ULTEM1000
2. FINISH:  
CONTACT: GOLD  
ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:  
DURABILITY: 500 CYCLES
4. ELECTRICAL:  
IMPEDANCE:  $50\Omega$   
FREQUENCY RANGE: DC to 40GHz  
VSWR(dB): 1.2:1 (-20.83dB)

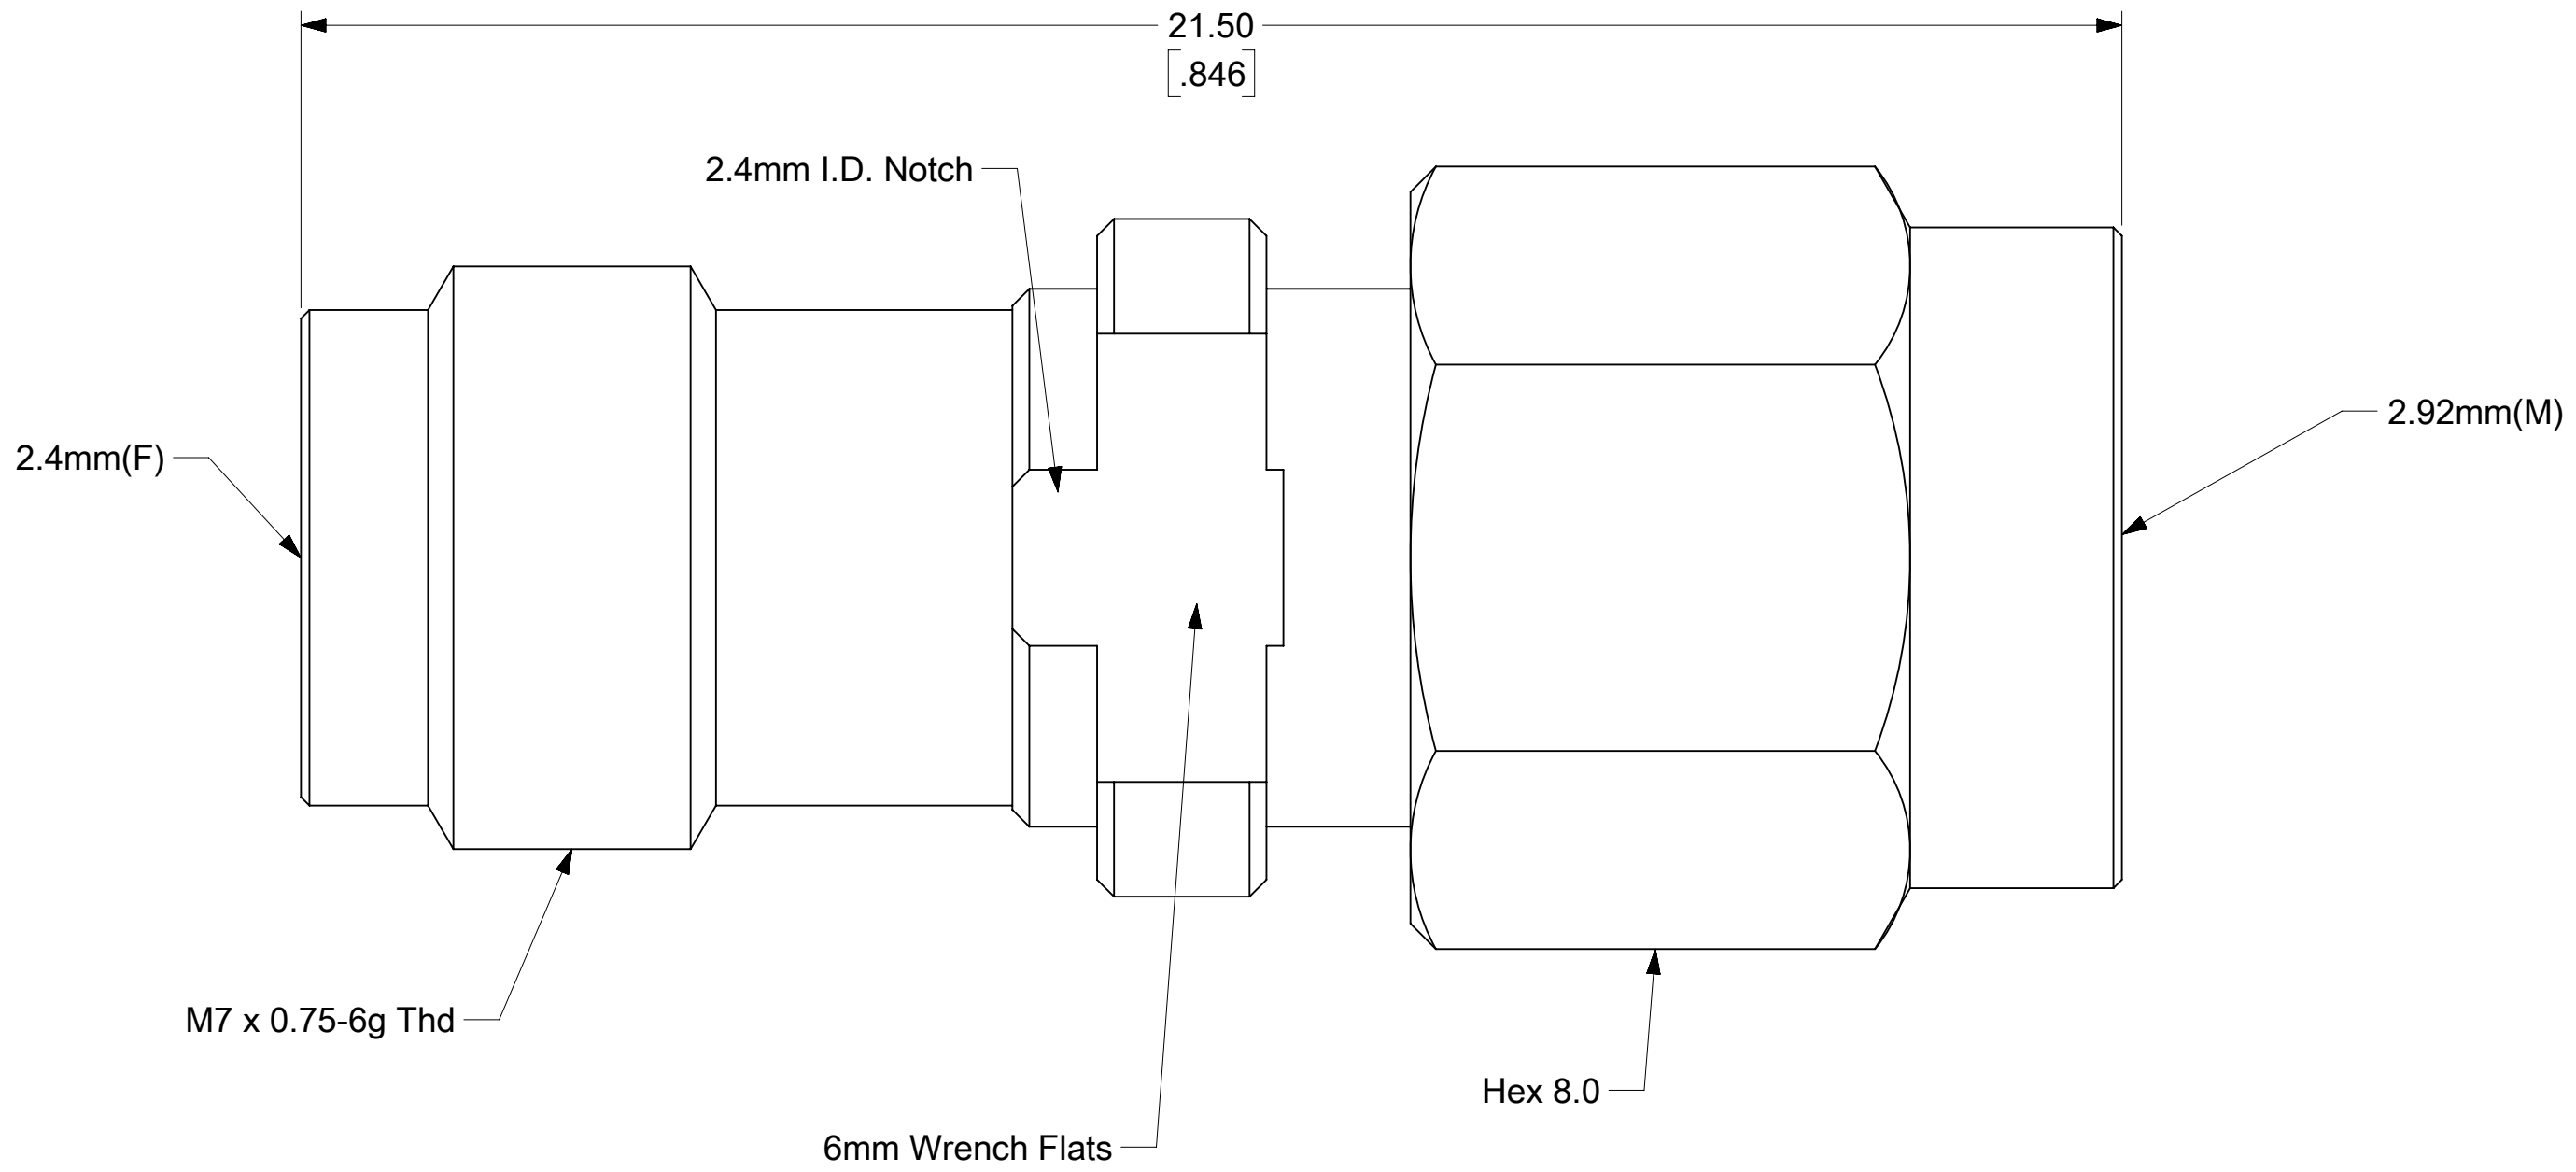

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
<div><div><div><div>F<sub>A</sub></div><div>= 0</div></div><div><div>F<sub>E</sub></div><div>= 0</div></div><div><div>F<sub>D</sub></div><div>= 0</div></div></div><div>DIVISIONAL SYMBOLS</div></div>		DIMENSION UNITS		SCALE		CURRENT REV DESC: INITIAL RELEASE				<div>molex</div>					
		MM/INCH		NTS											
		GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 731858 DRWN: PKH2022/11/24 CHK'D: JBORRELLI2022/12/14 APPR: LMEIER2022/12/15				2.4MM JACK TO 2.92MM PLUG ADAPTER					
			MM	INCH											
		4 PLACES	±	±											
		3 PLACES	±	±											
		2 PLACES	±	±											
DIVISIONAL SYMBOLS		1 PLACE		±		INITIAL REVISION:				PRODUCT CUSTOMER DRAWING					
		0 PLACES		±											
		ANGULAR TOL		± °											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													
						C-SIZE		73386		733862370				1 OF 1	