
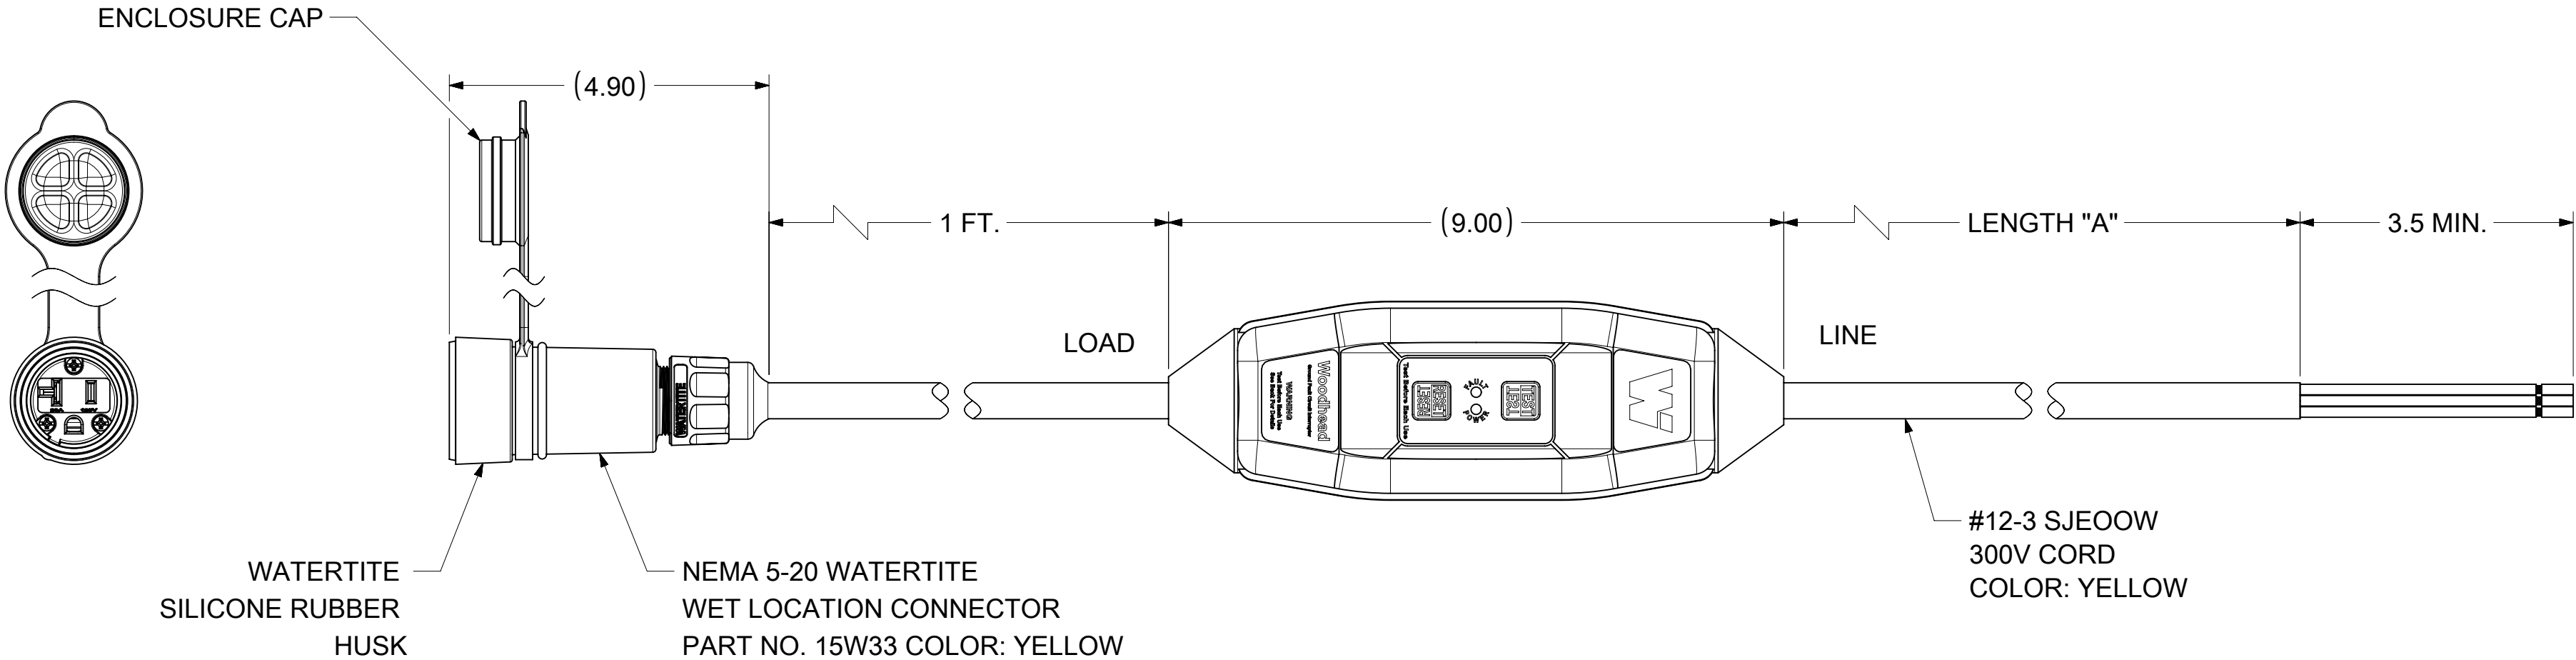


SPECIFICATION LABEL

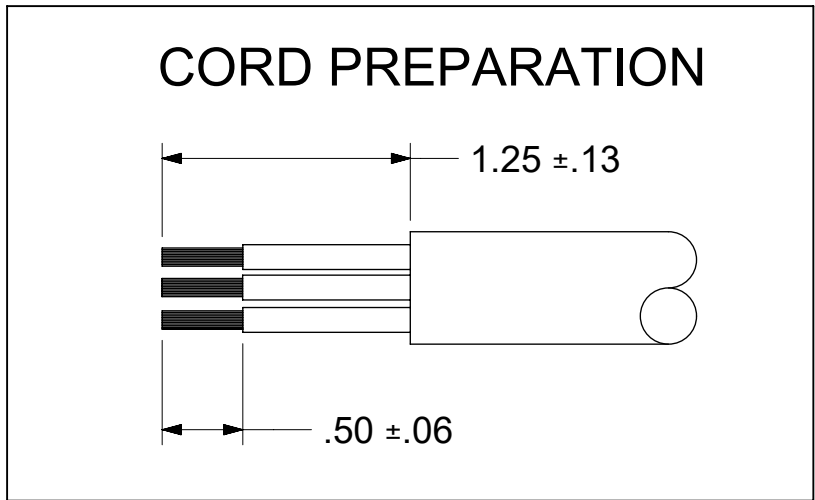

TECHNICAL
AGENCY APPROVAL: cURus
RATED SUPPLY VOLTAGE: 120VAC
RATED CURRENT: UP TO 20 AMPS
RESET TYPE: AUTO OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 120 AMPS, 50% INDUCTIVE
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: TYPE 4X, IP69, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	POWER UP
1301530278	20052-0PM18	17 FT +4 IN/-0 IN	MANUAL
1301530280	20052-0PM30	30 FT +6 IN/-0 IN	MANUAL
1301530281	20052-0PM45	45 FT +12 IN/-0 IN	MANUAL
1301530282	20052-0PM60	60 FT +12 IN/-0 IN	MANUAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX				molex									
	INCH		NTS															
	GENERAL TOLERANCES (UNLESS SPECIFIED)								120 VAC 20A IN-LINE GFCI MANUAL 17' FLYING LEADS 1' SECONDARY NEMA 5-20									
	ANGULAR TOL ± 0.5°																	
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 780725				PRODUCT CUSTOMER DRAWING									
	3 PLACES		±		DRWN: PPURSUTANDEL 2023/08/03													
	2 PLACES		±		CHK'D: DNGUYEN62 2024/03/20													
	1 PLACE		±		APPR: HKNEELAND 2024/03/22				DOCUMENT NUMBER SD-130153-278									
	0 PLACES		±		INITIAL REVISION:									DOC TYPE		DOC PART		REVISION
					DRWN: BPATTERS 2018/03/20									PSD		001		D
				APPR: HKNEELAN 2018/03/28														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER				
						C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1				