

Actuator

46-
2844.1CV0.008

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/46-2844.1CV0.008>

Your product:



46-2844.1CV0.008 Actuator

FRONT

Front form:	round
Front bezel colour:	Black
Front bezel material:	Plastic
Front dimension:	Ø 29 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm

OPERATING-/INDICATION PART

Lever material:	plastic
Lever shape:	short
Lever bar colour:	White
Lever colour:	Black

ELECTRICAL CHARACTERISTICS

Protection class:	II
-------------------	----

MECHANICAL CHARACTERISTIC

Switching angle:	60° right
Tightening torque:	2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Mechanical lifetime:	1 Mio. cycles of operation

Switching action: Rest - Momentary

Switching positions: 2 positions

Weight: 0.027 kg

AMBIENT CONDITION

Operating temperature: - 25 °C ... + 55 °C

Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)

IK front protection: IK06

Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)

IP front protection: IP65

Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE

Standards: CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

Approbations: CSA, EAC, UL

Conformities: CE

OTHER


Short Description: Actuator, Ø 22.3 mm, Ø 29 mm, non illuminative, Black, short, round, Black, Plastic, Rest - Momentary, IP65, IK06

Housing colour: Black


Housing material: Plastic

max. number of switching elements: 8

Mounting cut-outs:

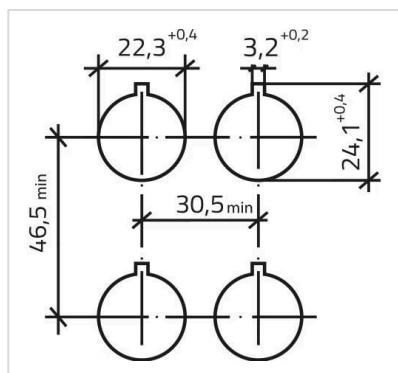

Switching positions:

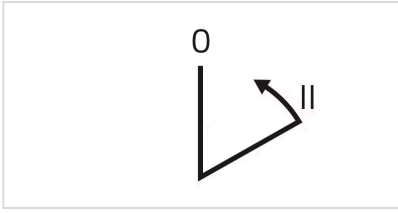

Dimension drawings:

