
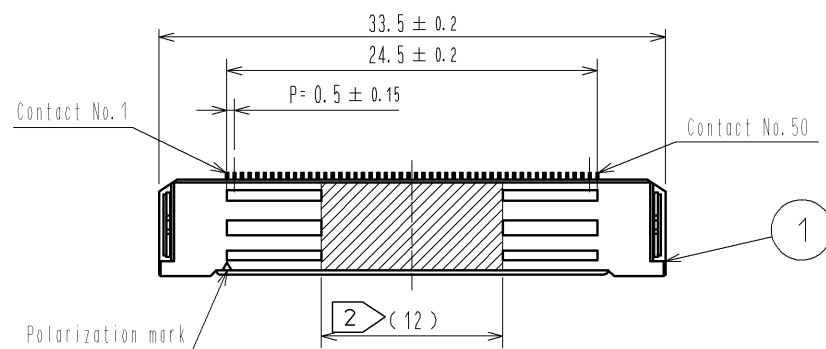
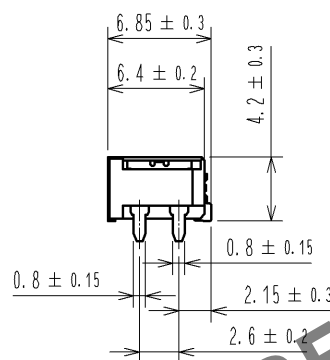



RECOMMENDED LAND PATTERN DIMENSION OF PCB
(PCB THICKNESS: $t=1.6$ mm METAL MASK THICKNESS: $t=0.12$ mm)

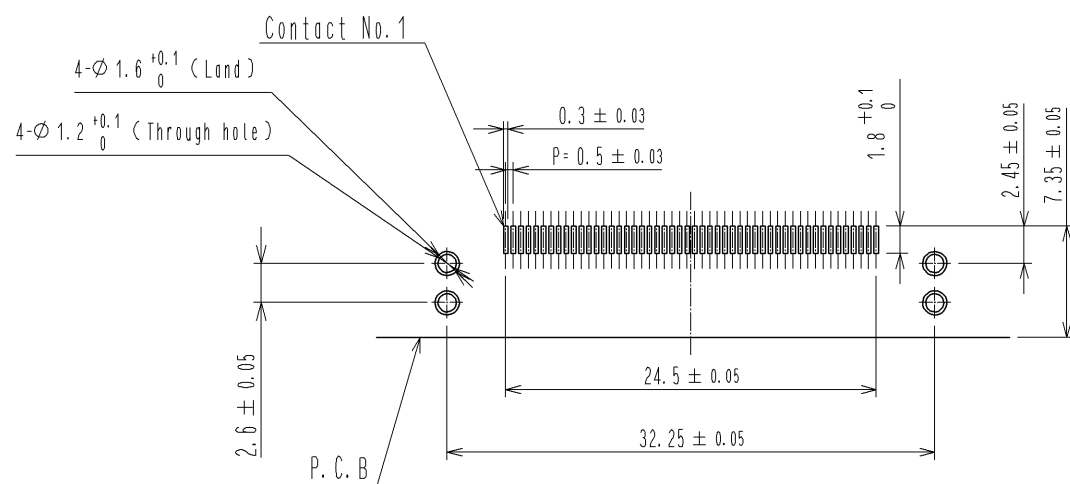

CONTACT①: Effective mating length (2)

CONTACT②: Effective mating length (1.5)

CROSS SECTION OF MATING(5:1)

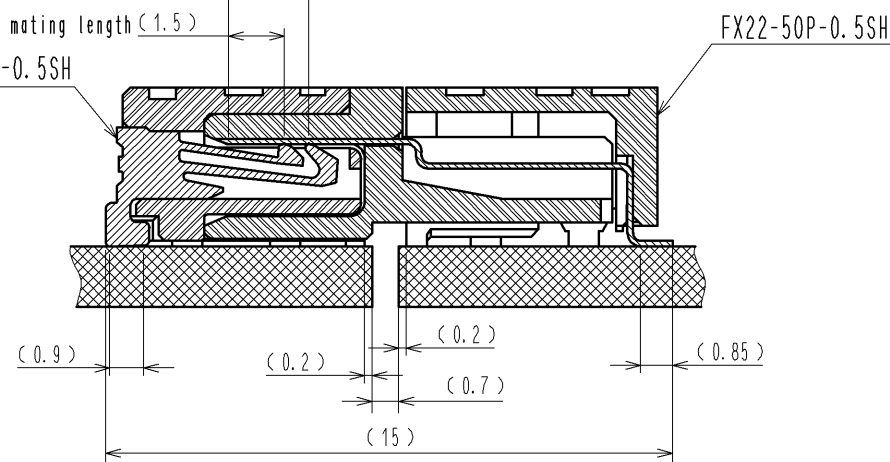

NOTE 1 Lead CO-Planarity is 0.1mm MAX.

② It shows the vacuum pickup area.

③ Packing for product applies embossed carrier tape packing. (700pcs/RL)


4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.

5 The dimensions in parentheses are for references.

3	COPPER ALLOY	CONTACT AREA: GOLD $0.1 \mu\text{m}$	5	POLYESTER	(EMBOSSSED COVER TAPE)
		LEAD AREA: GOLD $0.03 \mu\text{m}$	4	POLYSTYRENE	(EMBOSSSED CARRIER TAPE)
		UNDER PLATING: NICKEL $1.3 \mu\text{m}$	3	BRASS	TIN-PLATING $3 \mu\text{m}$
1	LCP	BLACK UL94V-0			UNDER PLATING: NICKEL $1 \mu\text{m}$
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : HS. OKAWA	14. 07. 07	DRAWING NO.	EDC3-352601-00
		CHECKED : KN. SHIBUYA	14. 07. 07	PART NO.	FX22-50S-0. 5SH
		DESIGNED : AH. EDASHIGE	14. 07. 07	CODE NO.	CL572-3101-9-00
		DRAWN : AH. EDASHIGE	14. 07. 07		

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

3 DRAWING FOR PACKING

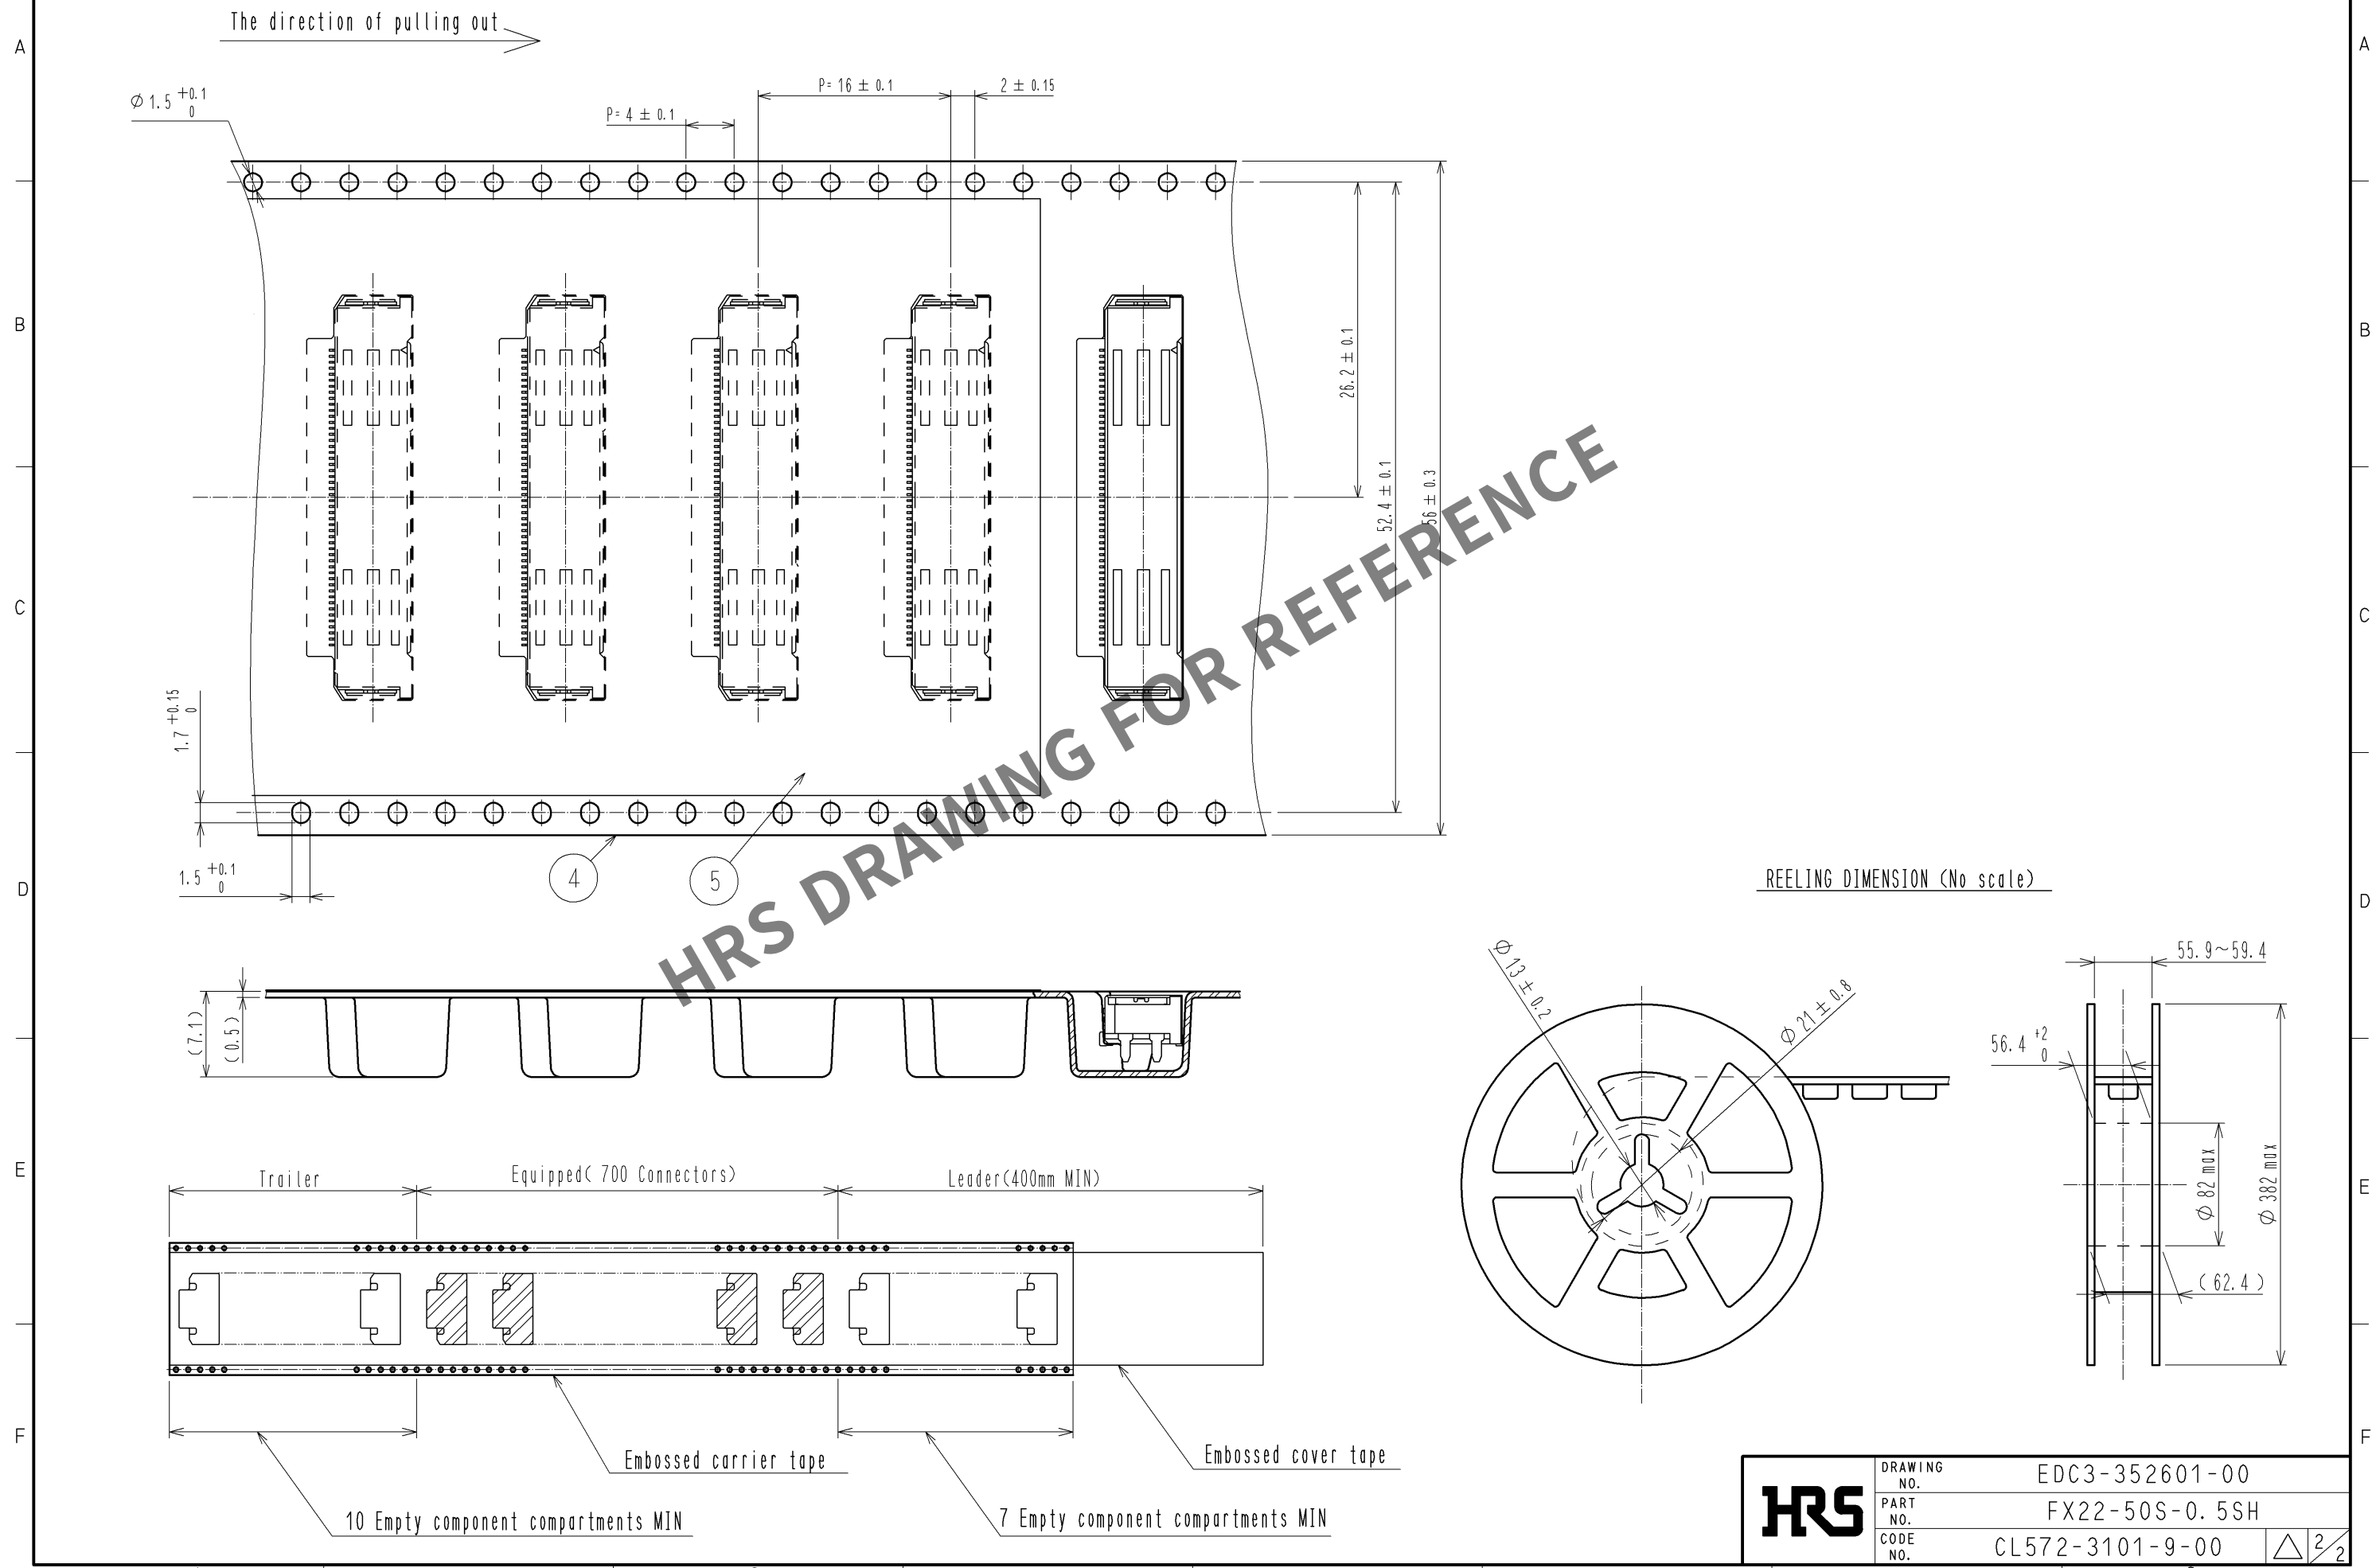

REELING DIMENSION (No scale)

HRS	DRAWING NO.	EDC3-352601-00
	PART NO.	FX22-50S-0.5SH
	CODE NO.	CL572-3101-9-00
		$\triangle$ 2/2