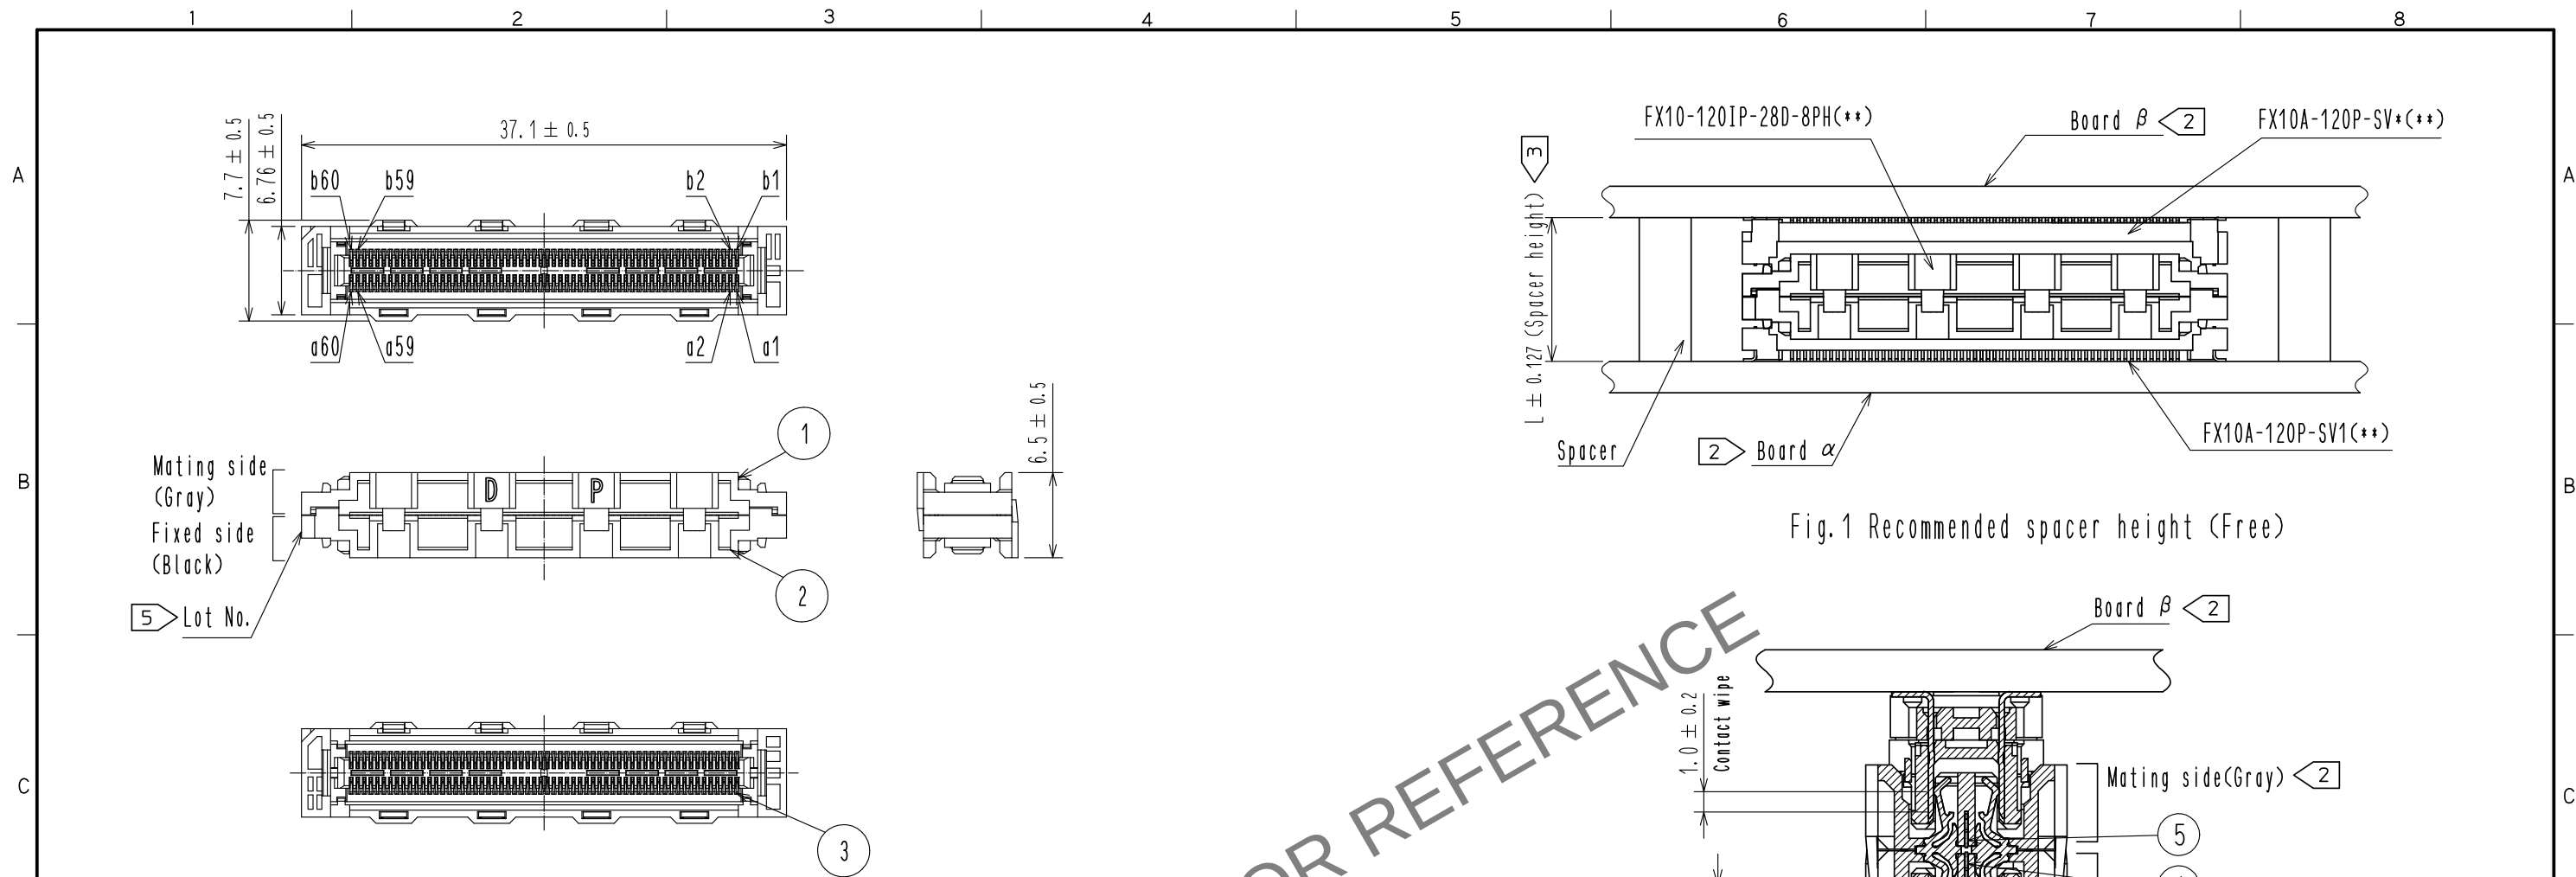


Table.1 Stacking height and connector combinations 

Board distance (Stacking height)	Header connector of Board α	Interposer	Header connector of Board β	Recommended spacer height(L) 
11mm	FX10A-120P-SV1(**)	FX10-120IP-28D-8PH(03)	FX10A-120P-SV2(**)	11±0.127mm
12mm	FX10A-120P-SV1(**)		FX10A-120P-SV3(**)	12±0.127mm
13mm	FX10A-120P-SV1(**)		FX10A-120P-SV4(**)	13±0.127mm

Table.2 Pin configuration of Interposer 4[illegible]

S: Signal for Differential SE: Siganal for Single-ended G1: Common ground 1 G2: Common ground 2

Note.

- 1 The header connectors are decided by board distance (stacking height). Connector combination is shown in Table 1.
- 2 Fixed side (Black side) of interposer should be mated with header mounted on board α .
Mating side (Gray side) should be mated with header mounted on board β .
- 3 Spacers are required to support the PWB's and protect the SMT solder joints.
Recommended spacer height is shown in Table 1.
- 4 Pin configuration is shown in Table 2.
This product consists of 28 Differential pairs ,4 Single-ended lines and 60 ground lines.
- 5 Lot No. shall be marked on the indicated position.
- 6 50pcs of this product are packed in soft tray. See Fig.3 for details.

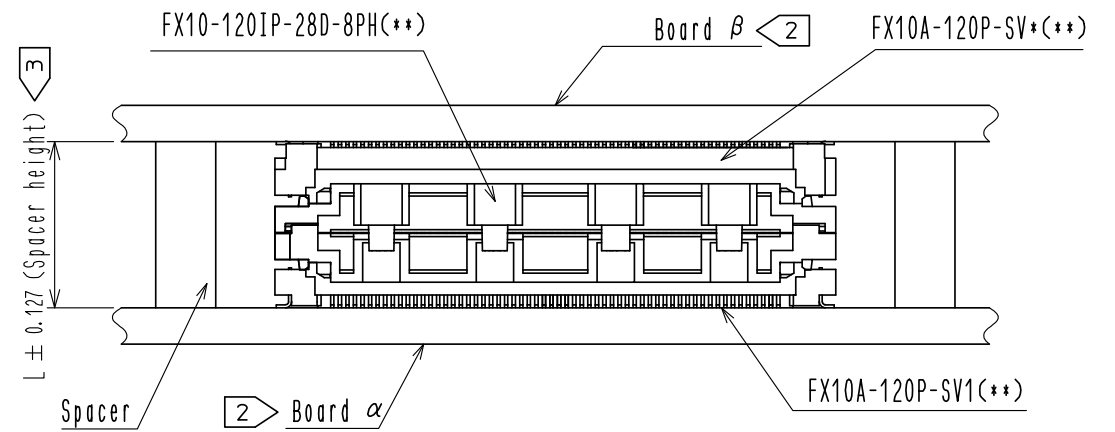


Fig.1 Recommended spacer height (Free)

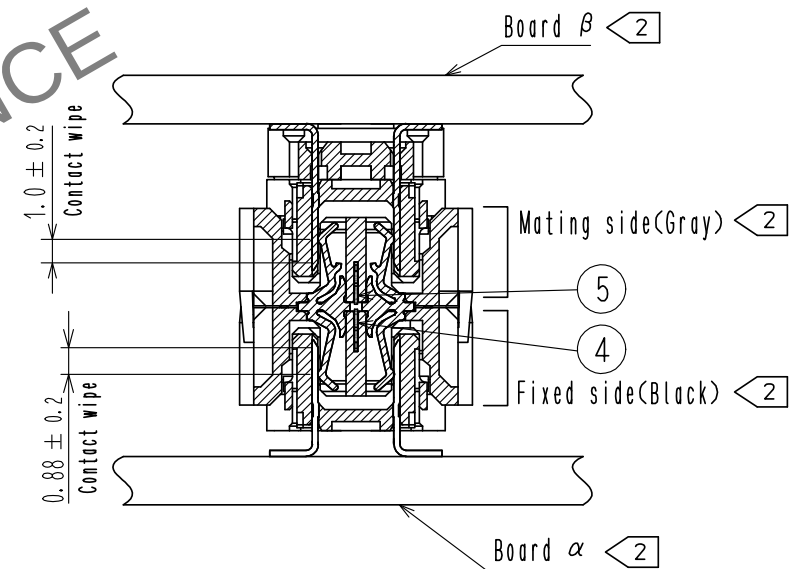



Fig.2 Mating cross section (Free)

3	Copper Alloy	Nil.5 μ m+Au0.76 μ m	6	PS	(Tray)				
2	LCPC(Black)	UL94V-0	5	Copper Alloy	Nil μ m				
1	LCPC(Gray)	UL94V-0	4	Copper Alloy	Nil μ m				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : TM. MATSUO			17. 07. 19		DRAWING NO. EDC-361674-03-00			
	CHECKED : MK. EZAKI			17. 07. 19		PART NO. FX10-120IP-28D-8PH<03>			
	DESIGNED : AS. MATSUZAWA			17. 07. 19		CODE NO. CL608-0014-5-03			
	DRAWN : XINGYU CHENG			17. 07. 19		  			

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

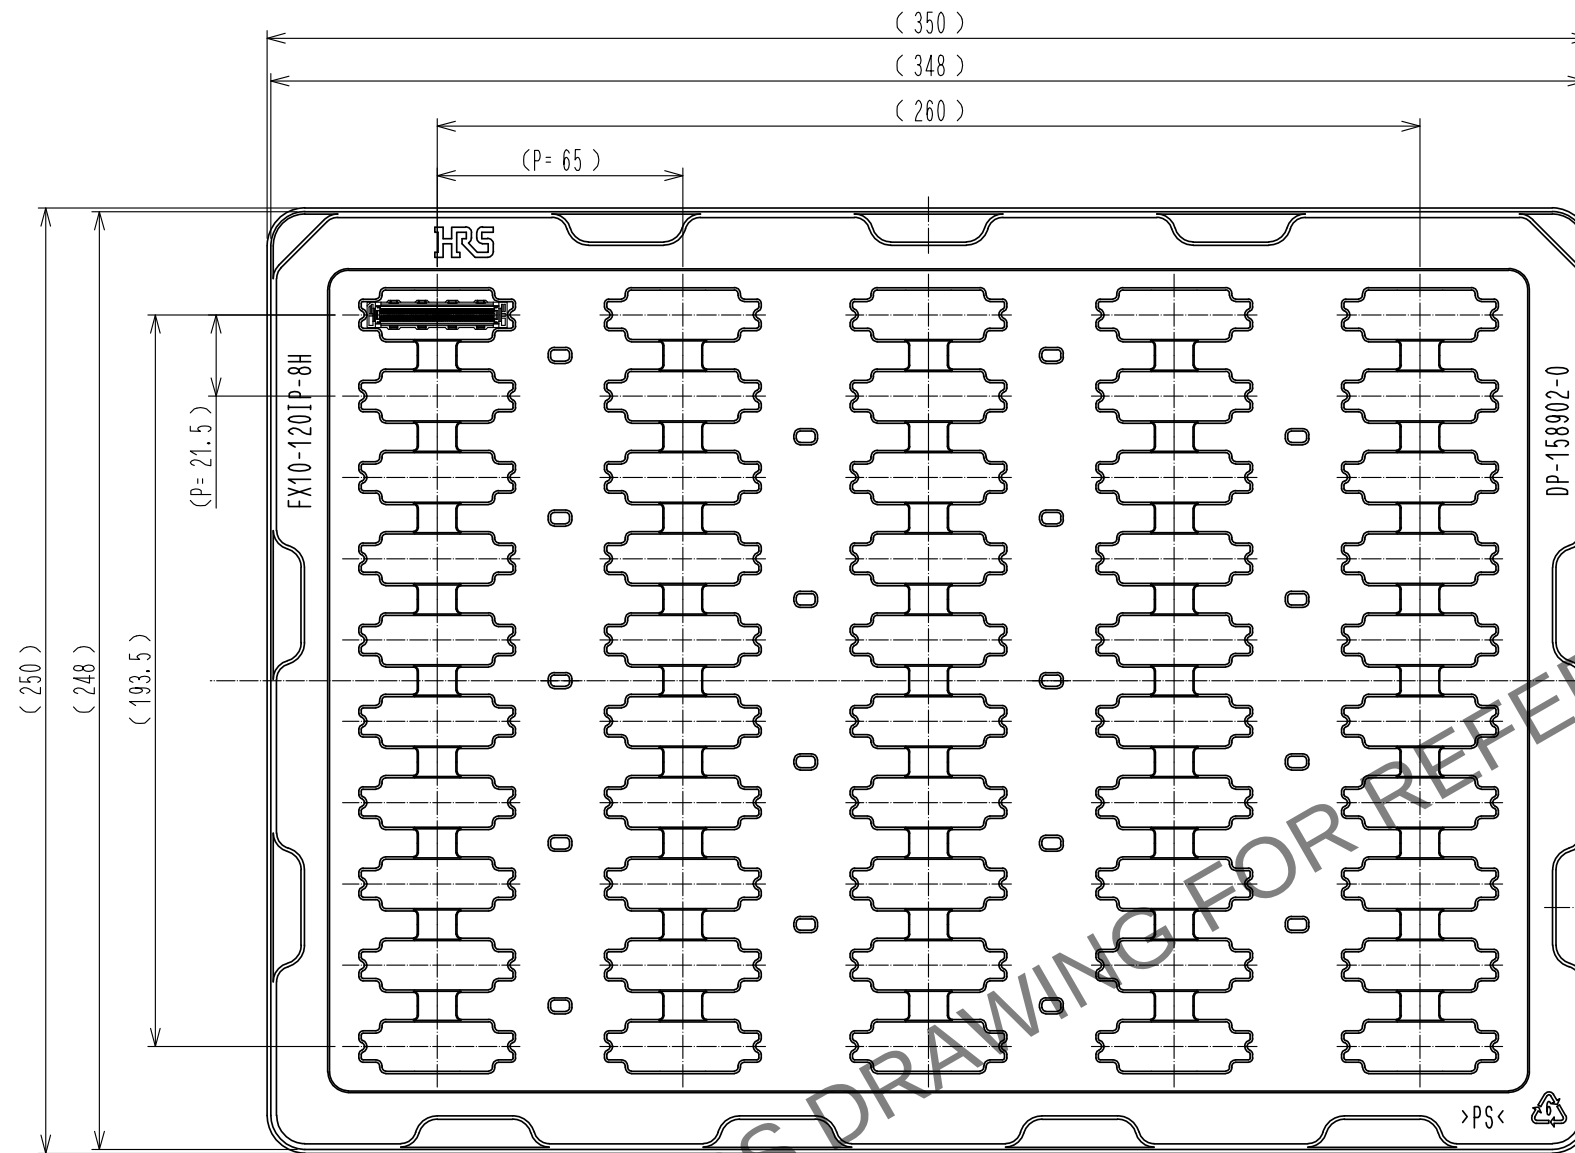


Fig.3 Drawing for packing (1:2) 

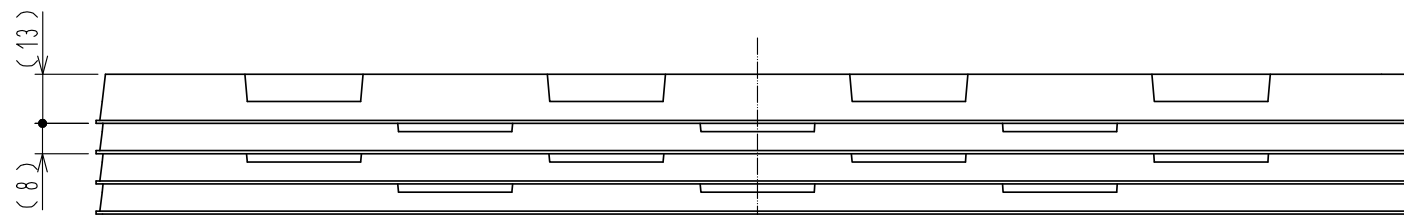


Fig.4 Stacked tray drawing (1:2)

HRS

DRAWING NO.	EDC-361674-03-00
PART NO.	FX10-120IP-28D-8PH(03)
CODE NO.	CL608-0014-5-03

 2/2