

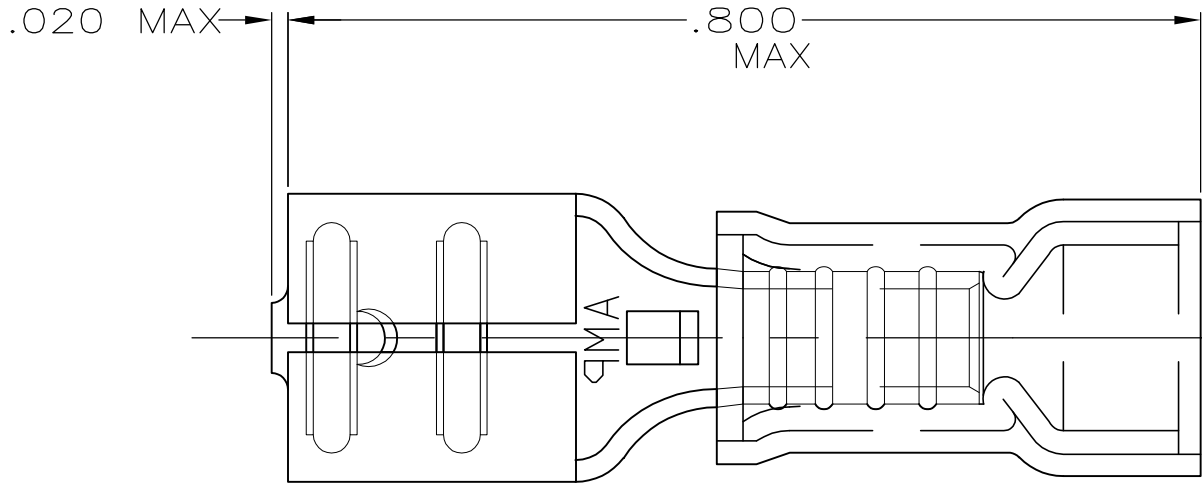


LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			G1	REVISED PER ECO-11-004917	11MAR11	RK HMR

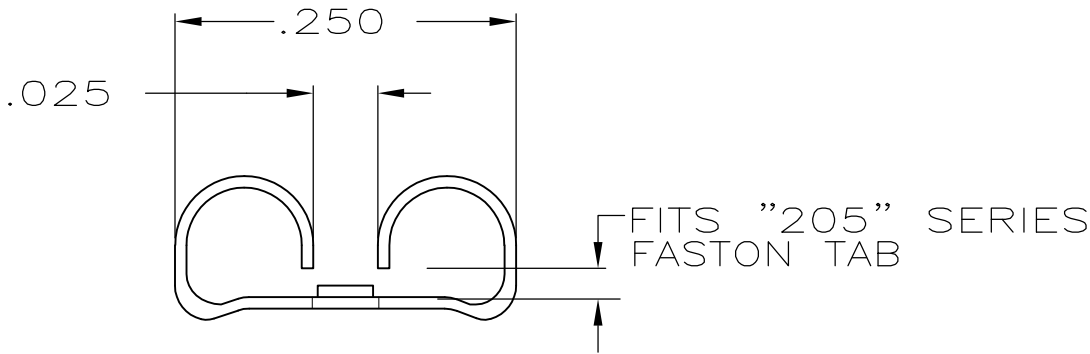

- 1 . INSULATION DIA .170 MAX
- 2 . FITS TAB .020 THK

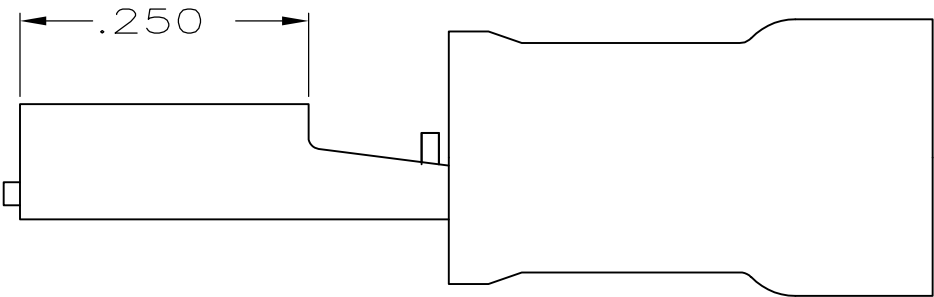

100	LOOSE PC,BOX	8-640913-1
-	TAPE MOUNTED	640913-2
-	LOOSE PIECE	640913-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
-

VOLTAGE RATING:
-

CIRCULAR MIL AREA:
-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
BODY,BRASS .016
SLV,NYLON,COLOR,BLUE

BODY,TIN

DWN
L OLMEDA
26JUN95

CHK
M ELLIS
26JUN95

APVD
B BARE
26JUN95

PRODUCT SPEC

APPLICATION SPEC

WEIGHT
-

RECEPTACLE, 205 SERIES,
FASTON, PIDG,
WIRE SIZE,16-14 AWG

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-640913

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
NTS

SHEET
1 OF 1

REV
G1

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[640913-2](#) [8-640913-1](#) [640913-2 \(MOUSER REEL\)](#) [640913-2 \(CUT STRIP\)](#)