

Series D xx P 24A 6 xx 12 LF

Number of contacts
09 , 15 , 25

Contacts
P : Pin

Termination

Code	Type	Foot Print/Pitch	Length of termination	PCB thickness
24A	Straight version	6 / 2.84mm	2	1.6

Plating
6 = 500 Mating / Unmating Mini

Packaging specification
Tape and Reel

See Note RoHS

NOTE RoHS iNFORMATION

- The "LF" product meet european union Directives and other country regulations asdescribed in GS-22-008.
- The housing will whistand exposure to 260° peak temperature for 30 seconds in a convection , infra-red or vapor reflow oven. See application notes/procedures if are available.
- Termination plating spec:1.27µ Nickel mini,2.5 to 7.5µ Sn(pure mate)
- Shell plating : Nickel bright
- Accessories : Sn pure bright
- Packaging spec ; See GS-14-920

Mounting Options

RL	Insert M3
RV	Female Screw UNC 4-40
RX	Insert UNC 4-40



Product Specification

see : GS-12-372

Packaging Specification

See GS-14-1054

litr	ecn no	dr	date
A	-	LH	03/02/06
B	LS06-0040	PC	23/03/06
C	LS06-0105	HLE	25/07/06
D	LS06-0220	PCR	2006/12/21
E	LS07-0050	HLE	2007/03/02
F	110-0120	NG	2010-05-27
G	110-0197	NG	2010-10-14


www.fciconnect.com			surface -  ISO 1302		tolerance std ISO 406 ISO 1101		projection 	mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	P.CRON	03/02/06	ANGULAR	LINEAR	0.X	±0.3	size A3	Scale 3:1	
Eng	H.LEGALLIC	03/02/06			0.XX	±0.1			
Chr	NIRMAL G	2010-10-14			0.XXX	±0.05			
Appr	SUDHIR V	2010-10-14	Product familySUB DELTA D PIP				ECN 110-0197		
			Spec ref -						
			title SUB DELTA D PIP MALE			dwg no C01-8646-0876			Rev. G
			straight for tape and reel packaging						
			catalog no SEE TABLE			CUSTOMER COPY			sheet 1 of 2

C



D

E

F

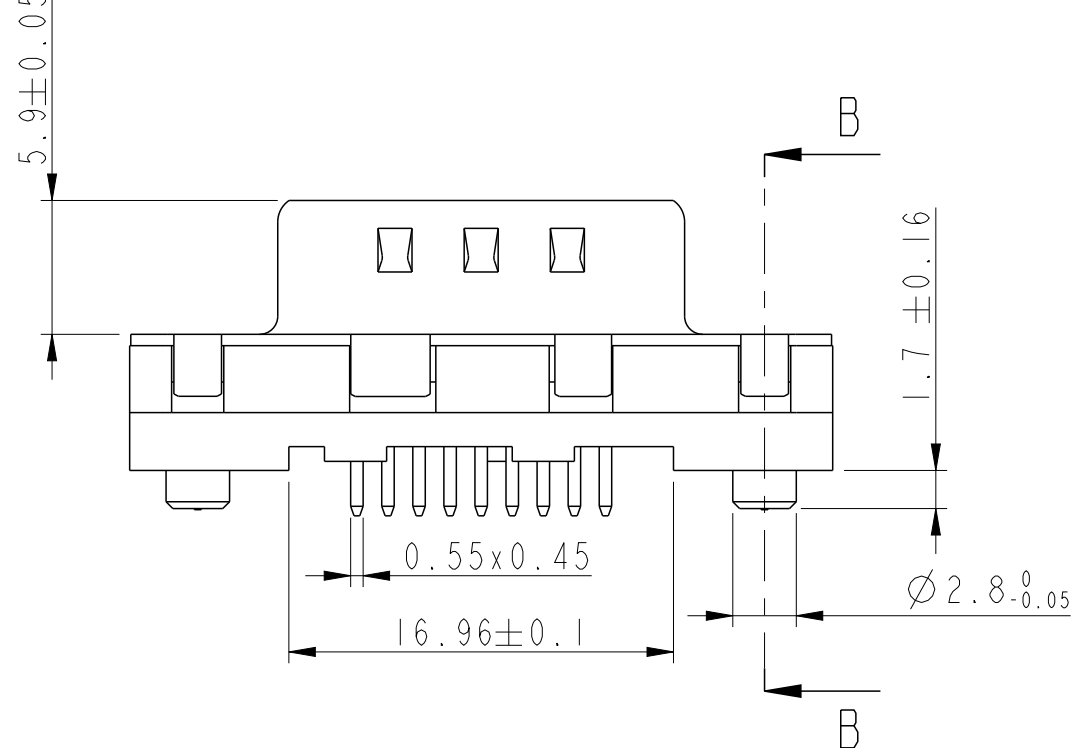


SECTION B-B

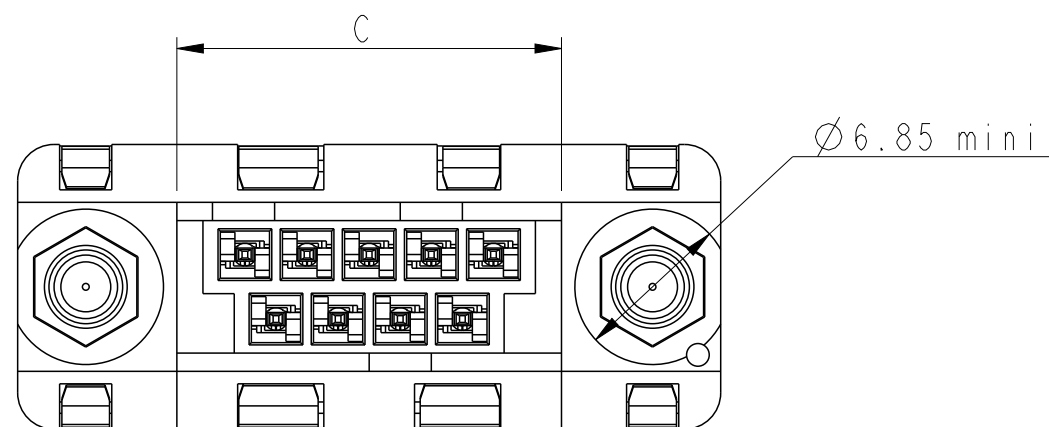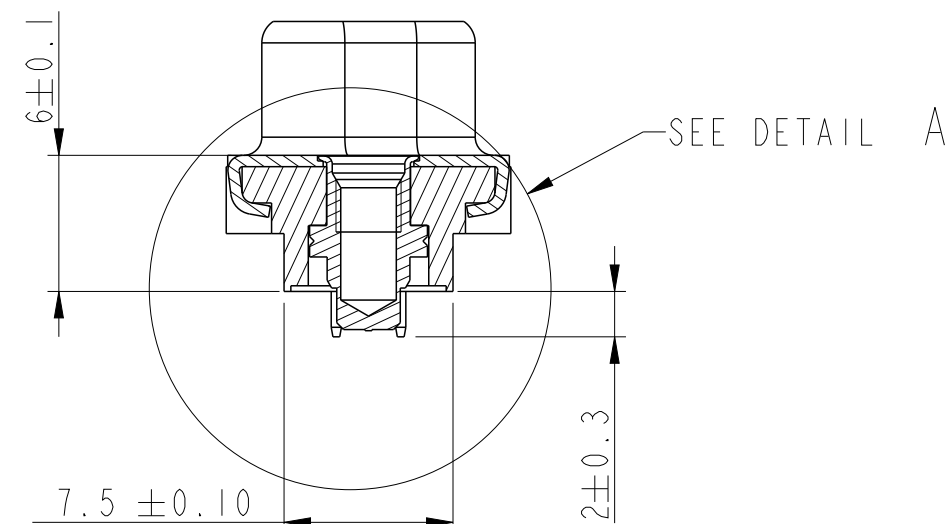


TRUE POSITIONING

Accessories details


6.02 ± 0.1

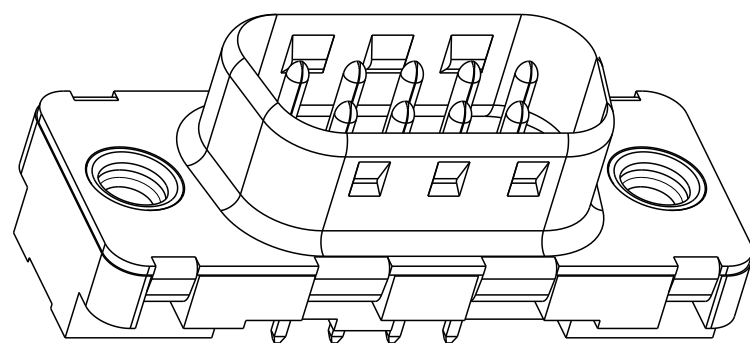

TYPE RX / RL

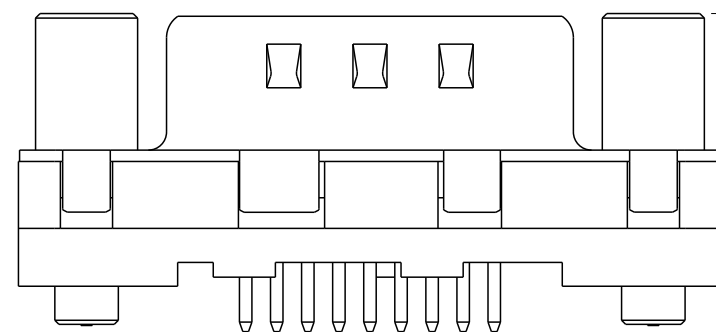

TYPE RV

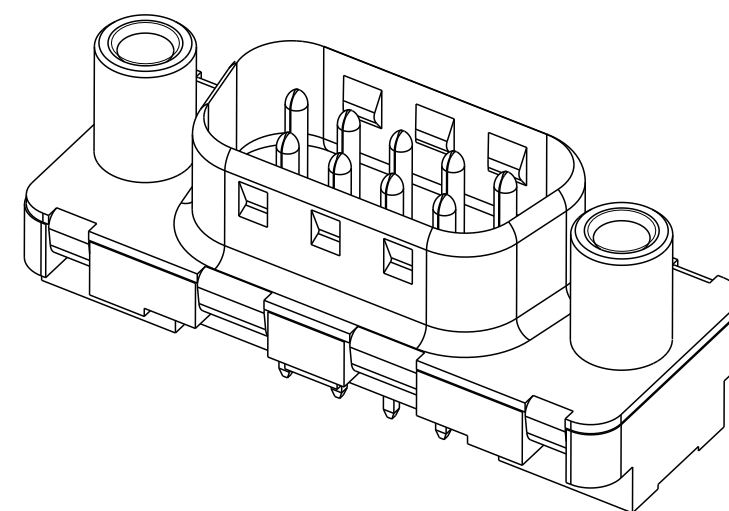

SHELL	P/M LEAD FR
09	D09P24A6xx
15	D15P24A6xx
25	D2524A6xx